
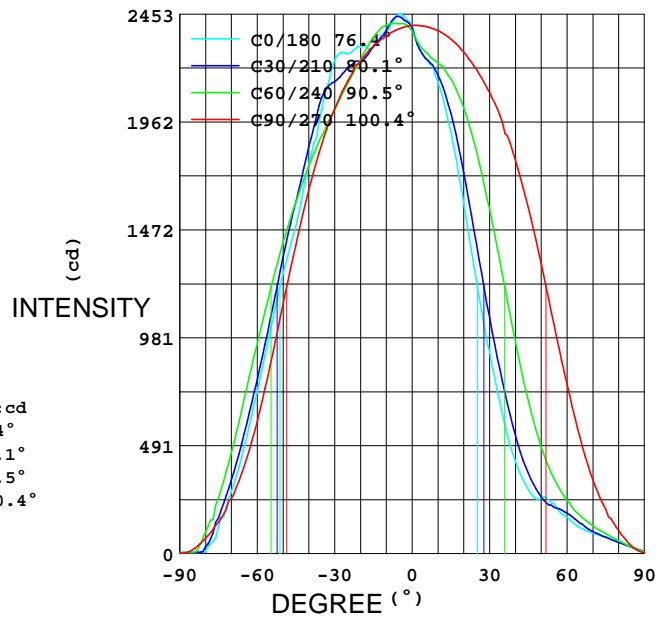



LUMINAIRE PHOTOMETRIC TEST REPORT

PRODUCT :	ADJUSTABLE WALLPACK	$I_{max}(cd)$ (cd):	2458	BRIGHTNESS (lm):	4571.6
NOMINAL POWER (W):	40	MAX Position (C,γ):	315°, 6.0°	ENERGY EFFICIENCY INDEX (EEI):	0.117
RATED VOLTAGE (V):	220	LOR (%):	100.0	VOLTAGE (V)	219.3
NOMINAL FLUX (lm):	4792.8	UP (%):	0.0	CURRENT (A)	0.182
TOTAL FLUX (lm):	4793	DOWN (%):	49.9	POWER (W)	39.18
Fixture qty.:	1	UP (%):	0.0	PF	0.981
TOTAL FLUX (lm):	4793	DOWN (%):	50.1	EFFICIENCY (lm/W)	122.3

INTENSITY DISTRIBUTION

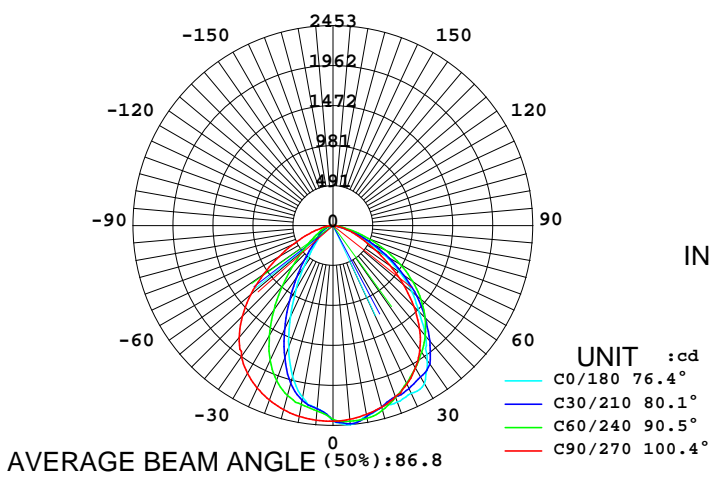

AAI FIGURE

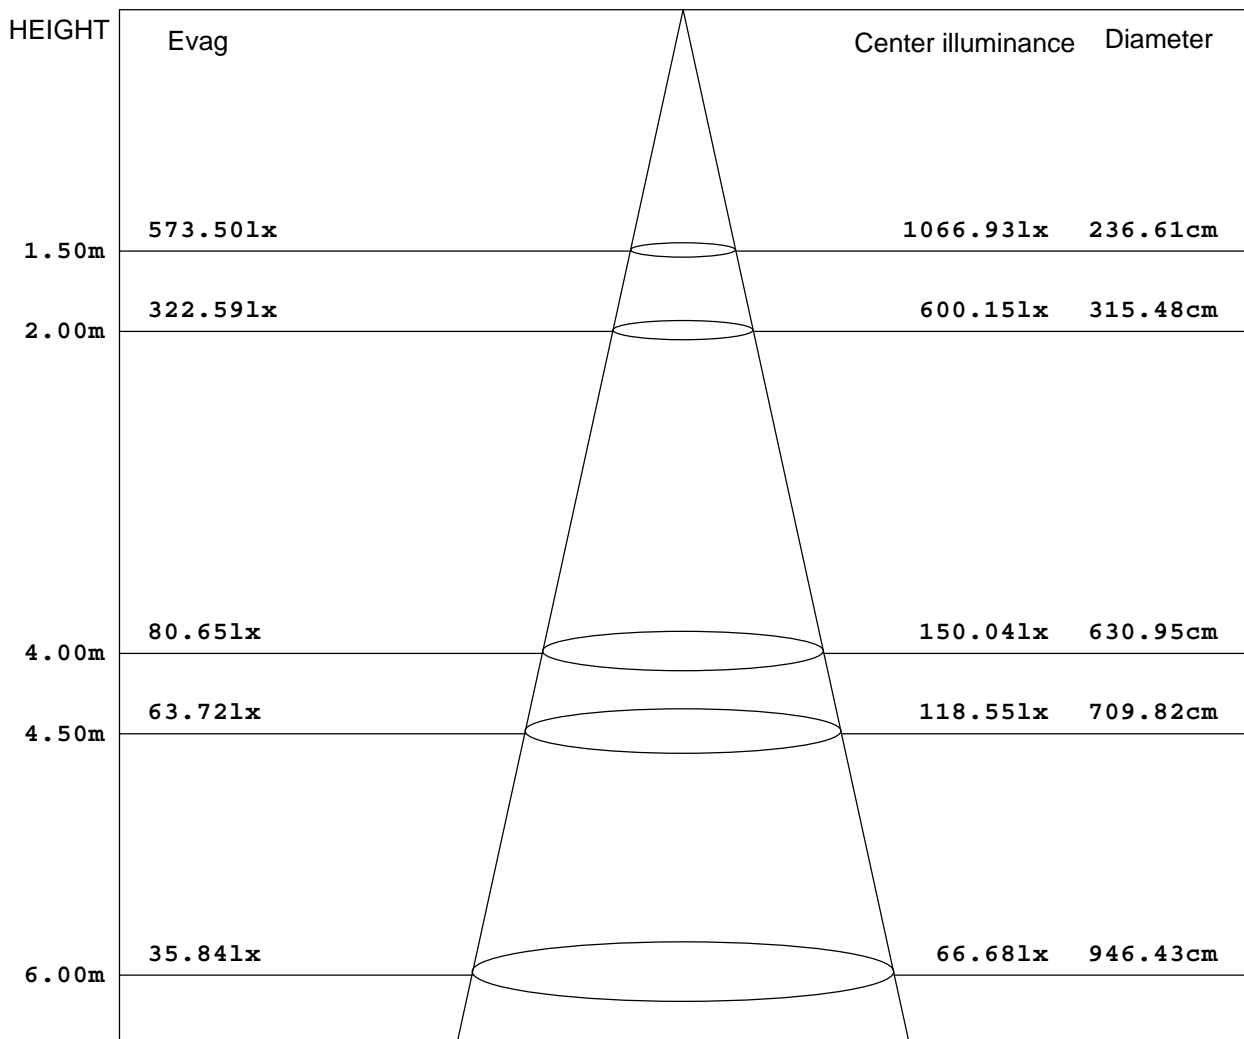


ANGLE : 76.5

ZONAL FLUX DIAGRAM



g	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	$\Phi_{\text{环}}$	$\Phi_{\text{总}}$
5.0	2453	2430	2385	2282	2252	2271	2397	2453	0- 5	56.69	56.69
10.0	2375	2401	2353	2206	2147	2207	2378	2417	5- 10	166.9	223.6
15.0	2306	2305	2306	2067	1918	2090	2338	2349	10- 15	267.7	491.4
20.0	2302	2224	2237	1834	1591	1885	2279	2274	15- 20	352.8	844.3
25.0	2272	2143	2147	1525	1241	1604	2202	2224	20- 25	418.7	1263
30.0	2244	2068	2023	1197	915.6	1293	2096	2150	25- 30	462.6	1726
35.0	2016	1965	1858	880.7	631.7	977.0	1961	2058	30- 35	483.0	2209
40.0	1770	1848	1655	624.4	422.2	701.7	1792	1961	35- 40	475.9	2685
45.0	1491	1670	1404	428.7	292.1	492.7	1572	1763	40- 45	449.7	3135
50.0	1269	1418	1129	297.0	251.7	338.0	1320	1518	45- 50	408.2	3543
55.0	1010	1153	854.3	224.0	227.0	243.1	1042	1251	50- 55	359.6	3902
60.0	735.2	882.6	600.2	180.1	166.4	192.3	769.6	971.2	55- 60	300.2	4203
65.0	484.3	620.5	396.0	145.5	118.2	155.3	530.2	696.7	60- 65	233.0	4436
70.0	281.5	389.1	249.4	111.8	94.19	122.8	338.6	453.8	65- 70	166.3	4602
75.0	123.8	200.3	143.8	81.69	74.00	91.90	201.0	257.8	70- 75	107.7	4710
80.0	9.500	43.70	68.90	52.00	51.09	62.30	105.2	95.70	75- 80	56.28	4766
85.0	5.200	1.300	18.09	26.10	29.10	35.20	35.79	1.600	80- 85	20.67	4787
90.0	4.100	1.800	3.400	4.900	6.300	11.00	4.700	1.900	85- 90	5.973	4793
95.0									90- 95		
100.0									95-100		
105.0									100-105		
110.0									105-110		
115.0									110-115		
120.0									115-120		
125.0									120-125		
130.0									125-130		
135.0									130-135		
140.0									135-140		
145.0									140-145		
150.0									145-150		
155.0									150-155		
160.0									155-160		
165.0									160-165		
170.0									165-170		
175.0									170-175		
180.0									175-180		
UNIT : $^{\circ}$	UNIT :cd									UNIT :lm	

ISOCANDELA DIAGRAM

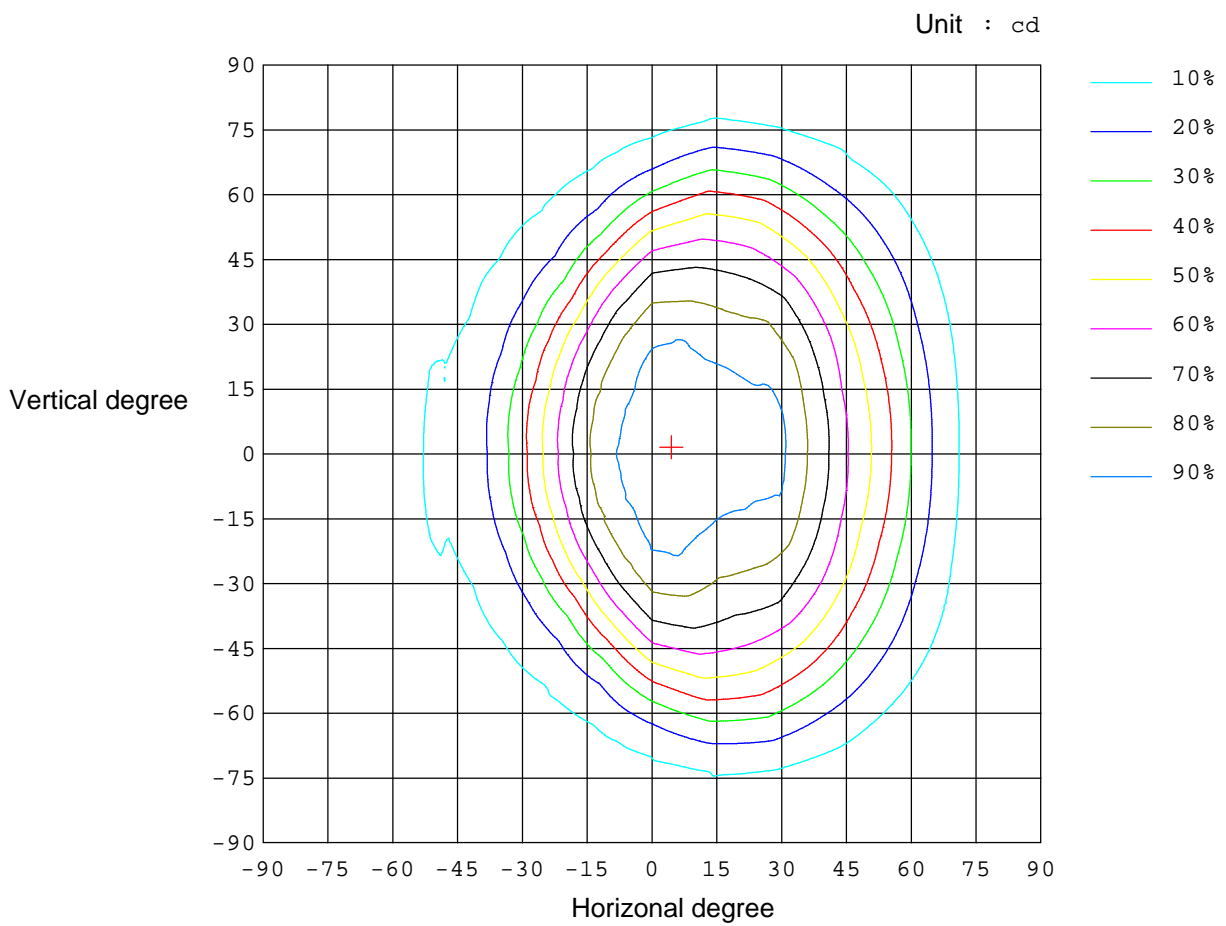

ISO-ILLUMINANCE CURVE

INSTALLATION HEIGHT 10M VERTICAL LUX:24.01LX

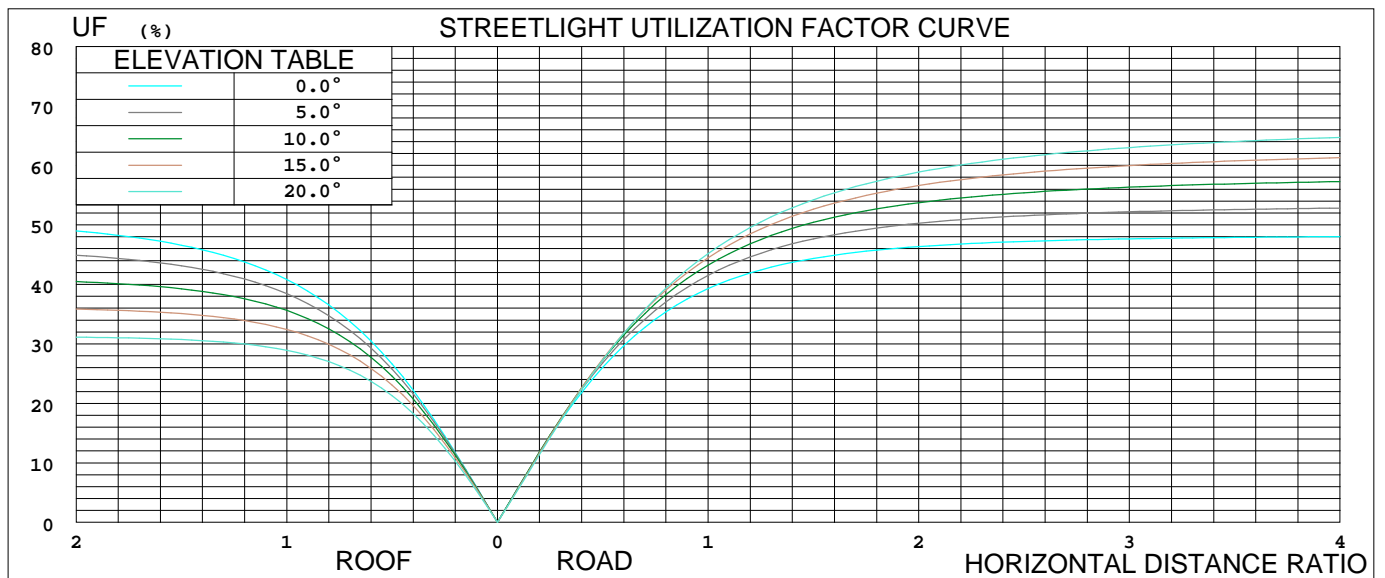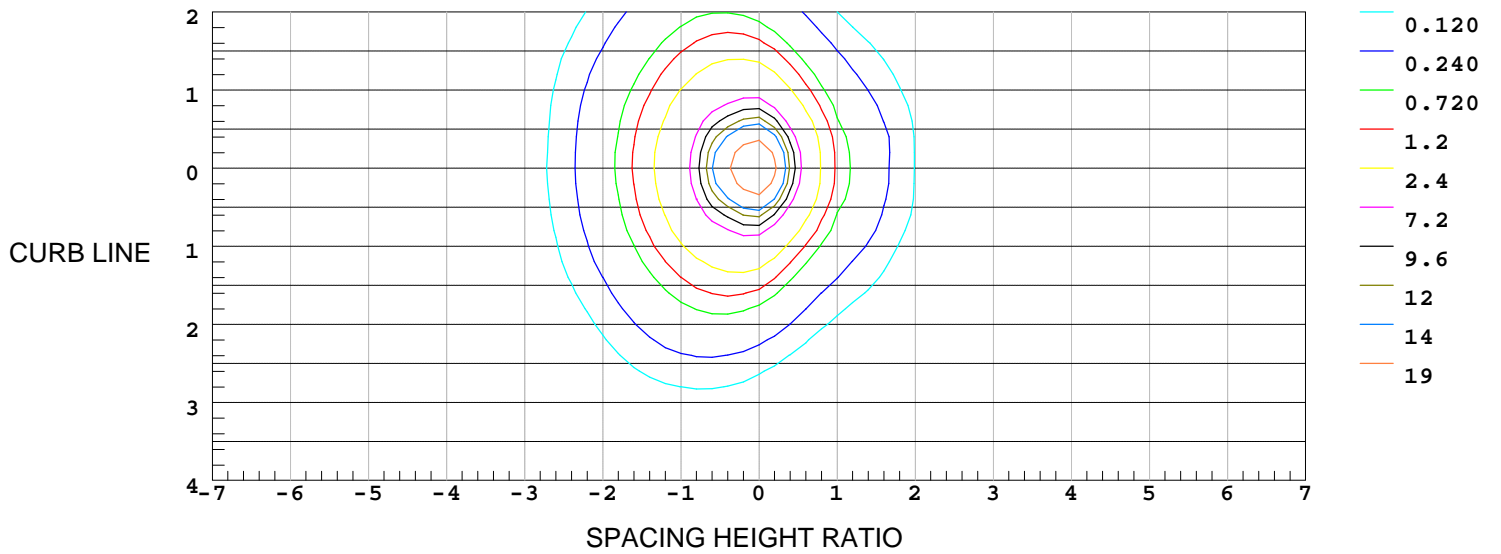

ROUND SHAPE NET DIAGRAM TEST REPORT

