
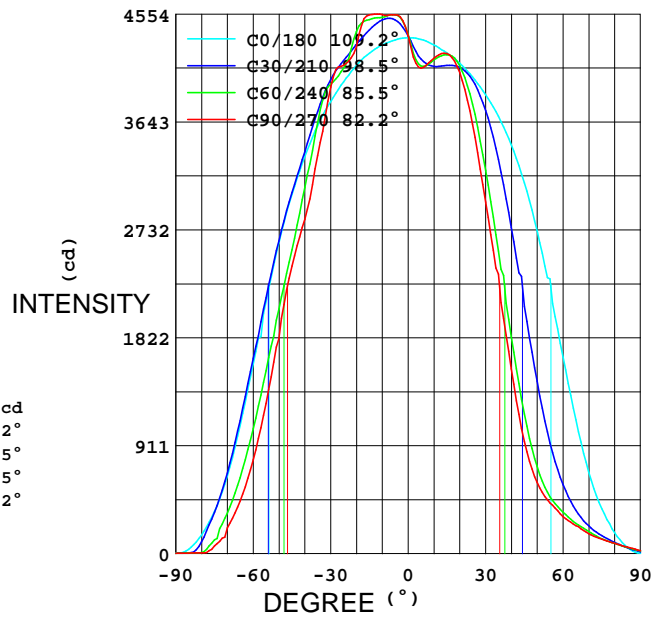



LUMINAIRE PHOTOMETRIC TEST REPORT

PRODUCT:	Adjustable wallpack	Imax (cd):	4554	BRIGHTNESS (lm):	8990.5
NORMINAL POWER (W):	75	Max position (C,γ):	90°, 11.0°	ENERGY EFFICIENCY INDEX (EEI):	0.112
RATED VOLTAGE (V):	220	LOR (%):	100.0	VOLTAGE (V)	219.3
NORMINAL FLUX (lm):	9363.7	ROAD UP (%):	0.0	CURRENT (A)	0.342
TOTAL FLUX (lm):	9364	ROAD DOWN (%):	57.3	POWER (W)	73.61
FIXTURE QTY :	1	ROOF UP (%):	0.0	PF	0.981
TOTAL FLUX (lm):	9364	ROOF DOWN (%):	42.7	EFFICIENCY (lm/W)	127.2

INTENSITY DISTRIBUTION

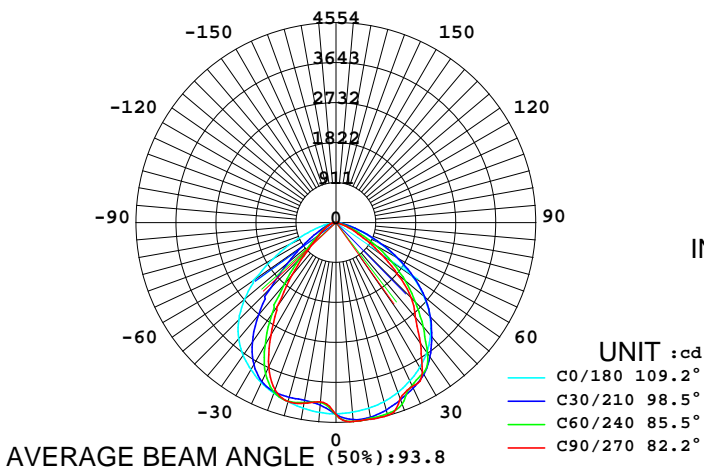

AAI FIGURE

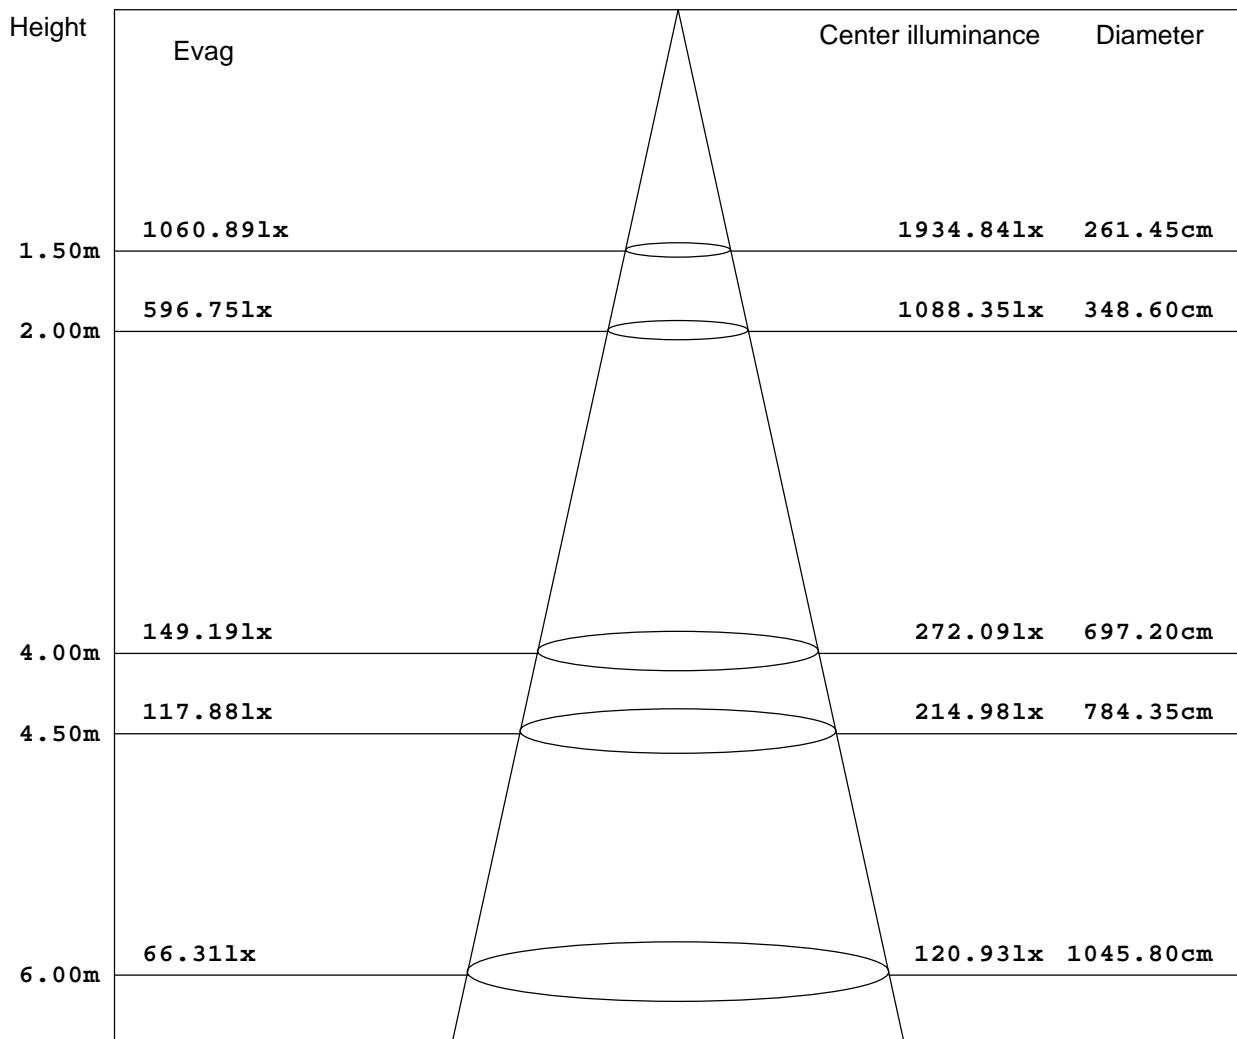


Angle : 82.1

ZONAL FLUX DIAGRAM

g	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	$\Phi_{\text{环}}$	$\Phi_{\text{总}}$
5.0	4335	4540	4548	4512	4340	4140	4097	4097	0- 5	103.5	103.5
10.0	4292	4512	4549	4486	4293	4136	4180	4093	5- 10	308.6	412.2
15.0	4224	4458	4548	4437	4226	4180	4221	4132	10- 15	510.9	923.1
20.0	4121	4391	4275	4368	4139	4142	4060	4094	15- 20	701.0	1624
25.0	3981	4208	4119	4224	4022	3936	3624	3894	20- 25	857.2	2481
30.0	3816	3897	3938	3900	3872	3520	2968	3492	25- 30	971.9	3453
35.0	3611	3672	3358	3647	3691	2939	2359	2923	30- 35	1026	4479
40.0	3349	3383	2823	3381	3450	2230	1560	2222	35- 40	1008	5487
45.0	3033	2871	2427	2952	3130	1549	945.5	1547	40- 45	935.1	6422
50.0	2620	2342	1814	2405	2724	1000	602.0	1005	45- 50	820.6	7243
55.0	2126	1813	1267	1876	2319	622.5	428.7	621.7	50- 55	680.4	7924
60.0	1602	1289	793.6	1354	1656	409.7	312.7	403.8	55- 60	531.0	8455
65.0	1081	829.8	443.3	882.6	1132	287.2	236.7	278.0	60- 65	384.6	8839
70.0	653.7	480.1	218.6	517.6	688.2	214.7	169.0	206.6	65- 70	256.9	9096
75.0	357.0	213.1	66.59	267.7	378.8	150.8	121.9	146.1	70- 75	152.1	9248
80.0	154.9	20.70	6.600	31.79	176.9	102.9	86.59	100.6	75- 80	75.02	9323
85.0	35.79	1.500	5.300	1.400	51.40	60.10	55.00	59.39	80- 85	29.51	9353
90.0	5.600	2.100	4.200	2.000	4.300	23.00	26.19	22.20	85- 90	10.81	9364
95.0									90- 95		
100.0									95-100		
105.0									100-105		
110.0									105-110		
115.0									110-115		
120.0									115-120		
125.0									120-125		
130.0									125-130		
135.0									130-135		
140.0									135-140		
145.0									140-145		
150.0									145-150		
155.0									150-155		
160.0									155-160		
165.0									160-165		
170.0									165-170		
175.0									170-175		
180.0									175-180		
Unit : $^{\circ}$	Unit :cd									Unit :lm	



ISOCANDELA DIAGRAM

Unit : cd

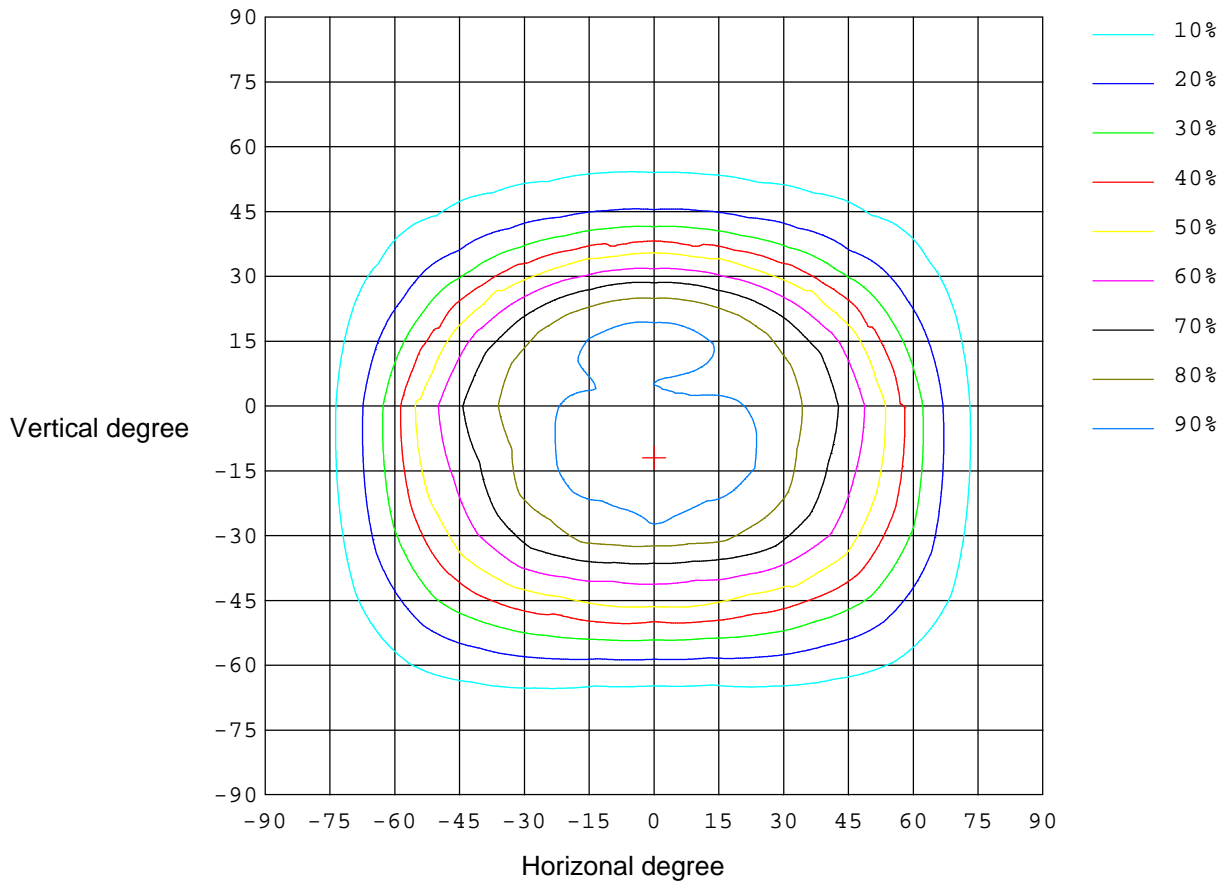

ISO-ILLUMINANCE CURVE

INSTALLATION HEIGHT : 10M, VERTICAL LUX : 43.53 lx

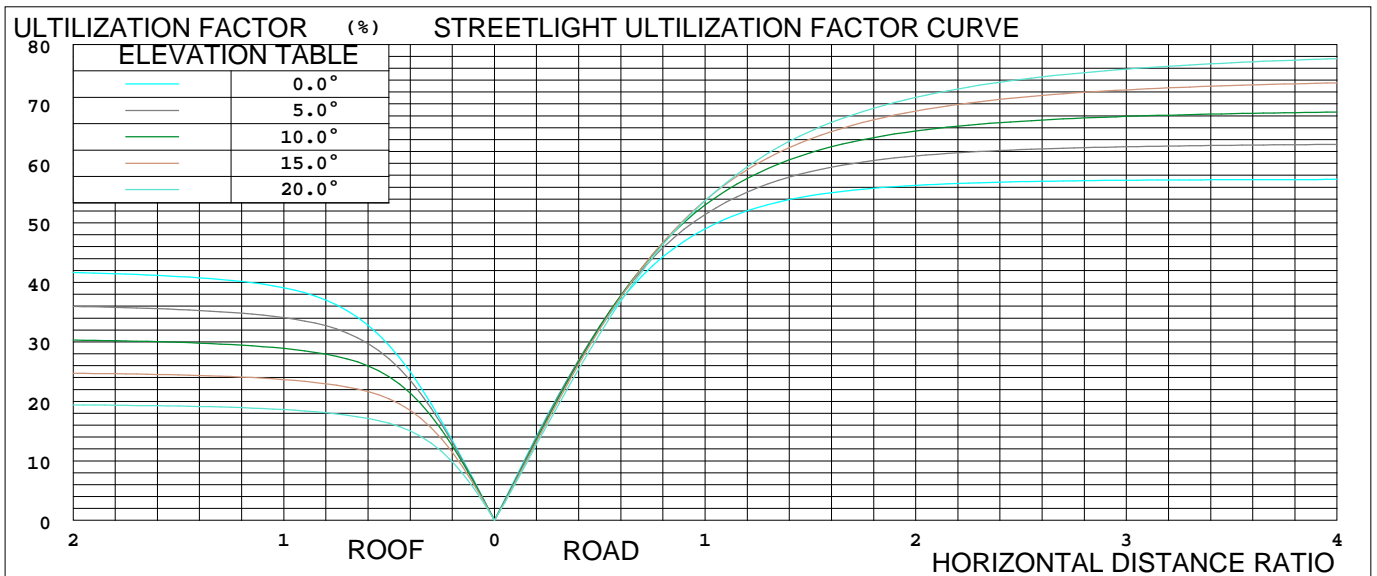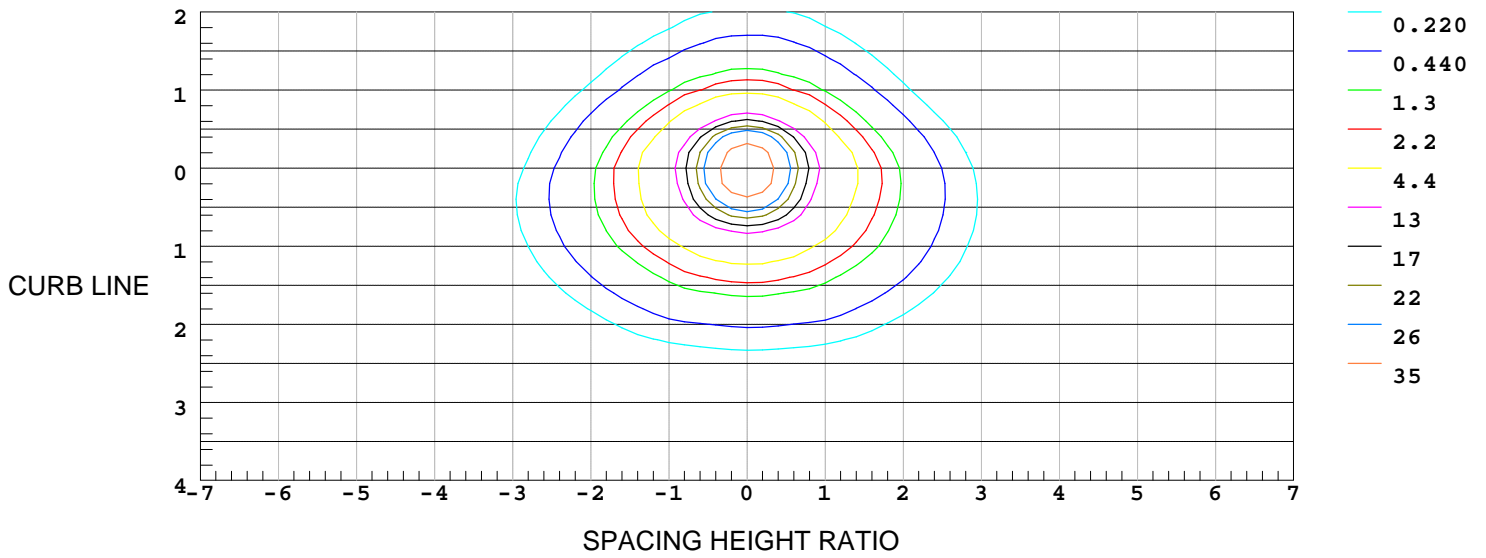

ROUND SHAPE NET DIAGRAM TEST REPORT

