

Report No.:

Test Time: 2021/5/22 17:40:12

LUMINAIRE PHOTOMETRIC TEST REPORT


Luminaire Property

Manufacturer: 0	Voltage(V): 109.91 V
Luminaire Type: OJL-504-BK	Current(A): 0.1110 A
Lamp Type:	Power(W): 12.18 W
Luminous Width: 0 mm	Power Factor: 0.9950
Luminous Length: 0 mm	Lamp Luminous Flux: 648.70
Luminous Height: 0 mm	


Photometric Results

CIE Class: Direct	Max. Intensity: 1585.03 cd
Luminaire Luminous Flux: 648.6982	Max. Intensity Angle: C=315 Gamma=8
Downward Ratio: 100.00%	Upward Ratio: 0.00%
Luminaire Efficacy Rating(LER): 53.26 lm/W	Efficacy: 100.00%
Beam Angle(50%) C0-180,C90-270: 30.6,30.1	Center Intensity: 1394.36 cd
Field Angle(10%) C0-180,C90-270: 62.1,61.1	

Picture of Luminaire



Luminous Intensity Distribution Curve

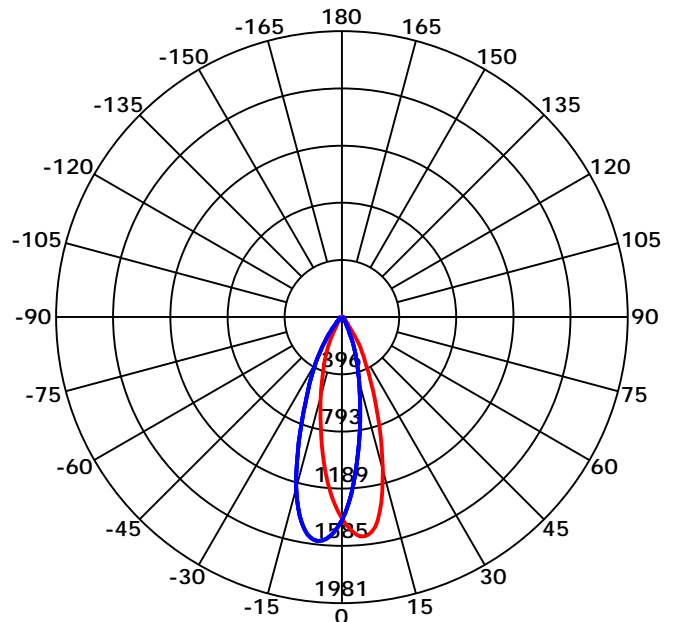

Beam Angle(50%) C0-180,C90-270: 30.6 deg,30.1 deg

C0-180 ——— C90-270 ———



C Range: 0 - 360 Deg
 C Interval: 45.0 Deg
 Test Speed: High
 Temperature:
 Operators:
 Test Date: 2021/5/22 17:40:12

G Range: 0 - 90 Deg
 G Interval: 1.0 Deg
 Test System: Huipu CPM-1800B Goniophotometer
 Humidity:
 Test Distance: 6.031 m
 Remarks:

Report No.:

Test Time: 2021/5/22 17:40:12

Luminous Intensity Distribution Curve

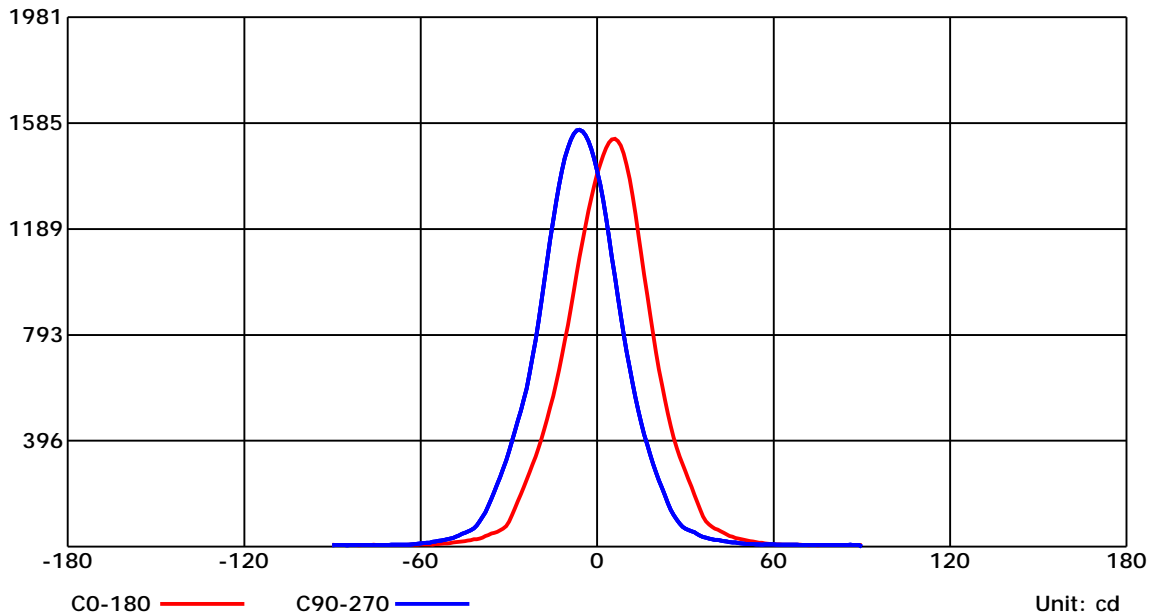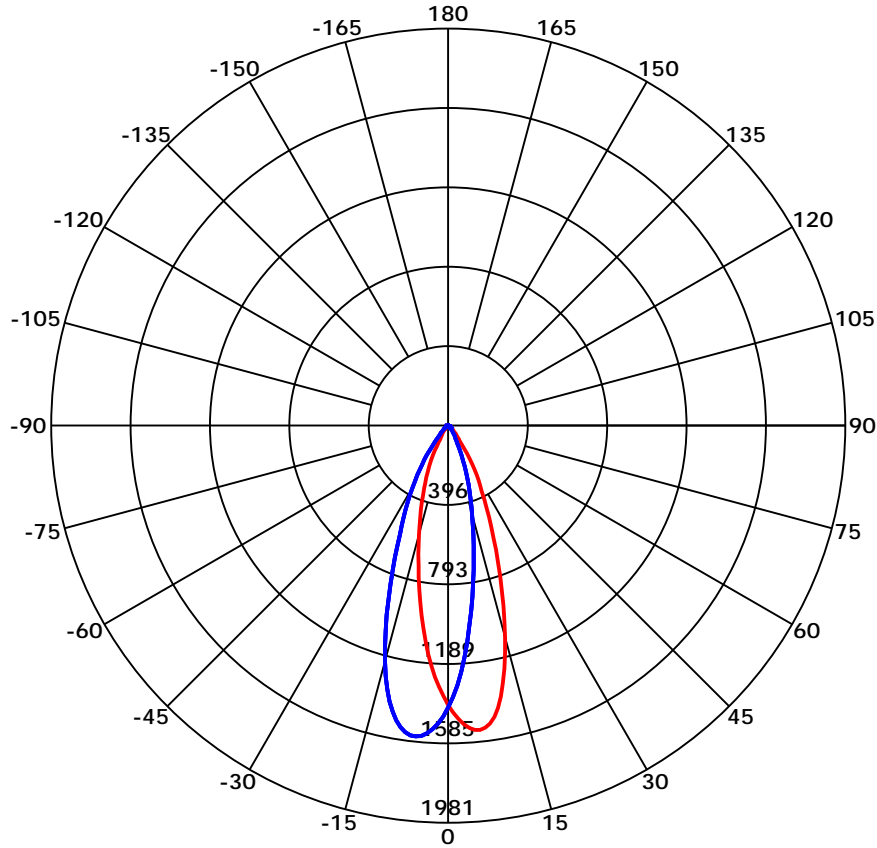

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2021/5/22 17:40:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-1800B Goniophotometer

Humidity:


Test Distance: 6.031 m

Remarks:

Report No.:

Test Time: 2021/5/22 17:40:12

Luminous Intensity Distribution Curve

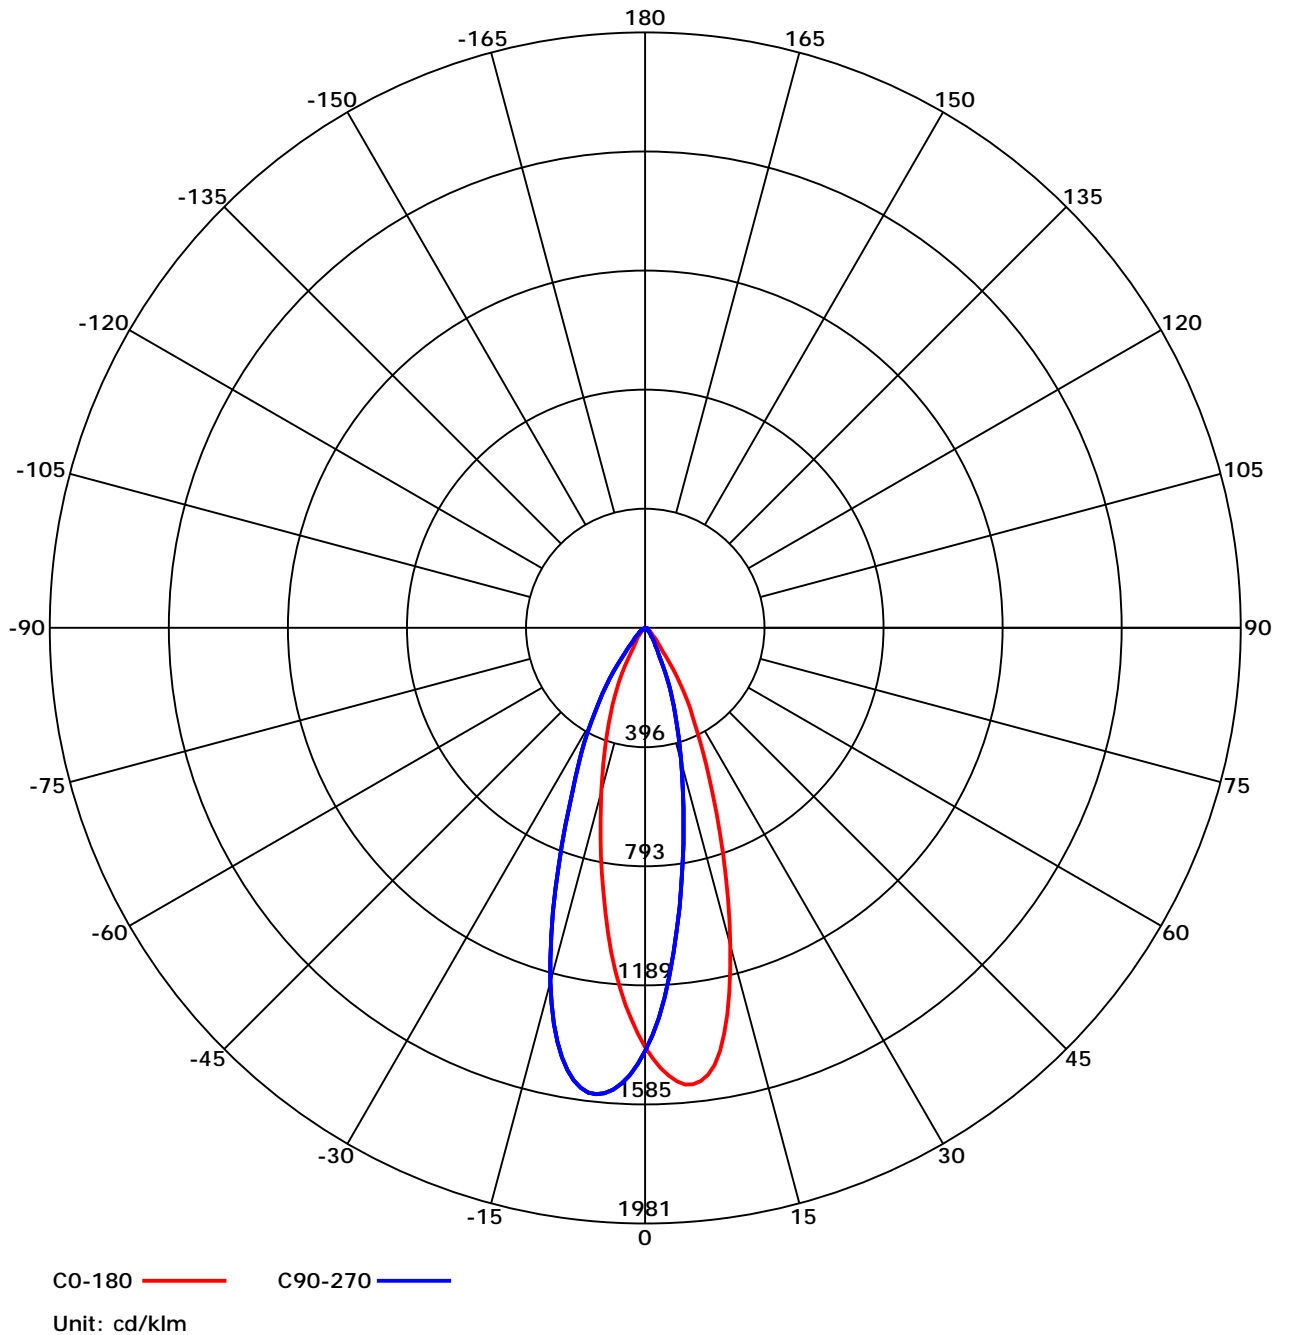

C Range: 0 - 360 Deg
 C Interval: 45.0 Deg
 Test Speed: High
 Temperature:
 Operators:
 Test Date: 2021/5/22 17:40:12

G Range: 0 - 90 Deg
 G Interval: 1.0 Deg
 Test System: Huipu CPM-1800B Goniophotometer
 Humidity:
 Test Distance: 6.031 m
 Remarks:


Report No.:

Test Time: 2021/5/22 17:40:12

UTILIZATION FACTORS TABLE

RHOCC	80			70			50			30			10			0
RHOW	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	COEFFICIENTS OF UTILIZATION FOR RHOFC=20															
0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1	0.99	0.96	0.95	0.98	0.95	0.93	0.95	0.92	0.89	0.90	0.87	0.84	0.84	0.81	0.78	0.73
2	0.94	0.92	0.90	0.93	0.90	0.88	0.90	0.87	0.85	0.87	0.83	0.80	0.82	0.78	0.75	0.70
3	0.90	0.88	0.87	0.89	0.87	0.85	0.87	0.84	0.81	0.84	0.80	0.77	0.79	0.75	0.72	0.68
4	0.87	0.85	0.83	0.86	0.83	0.82	0.84	0.80	0.78	0.81	0.77	0.74	0.77	0.73	0.69	0.65
5	0.84	0.82	0.81	0.83	0.81	0.79	0.81	0.78	0.75	0.78	0.74	0.71	0.75	0.71	0.67	0.63
6	0.81	0.79	0.78	0.80	0.78	0.77	0.78	0.75	0.73	0.76	0.72	0.69	0.73	0.69	0.65	0.61
7	0.79	0.77	0.76	0.78	0.76	0.74	0.76	0.73	0.71	0.74	0.70	0.67	0.71	0.67	0.63	0.60
8	0.76	0.75	0.74	0.76	0.74	0.72	0.74	0.71	0.69	0.72	0.68	0.65	0.69	0.65	0.62	0.58
9	0.75	0.73	0.72	0.74	0.72	0.71	0.72	0.69	0.67	0.70	0.66	0.64	0.68	0.63	0.60	0.57
10	0.73	0.71	0.71	0.72	0.70	0.69	0.70	0.67	0.66	0.68	0.65	0.62	0.66	0.62	0.59	0.56

LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

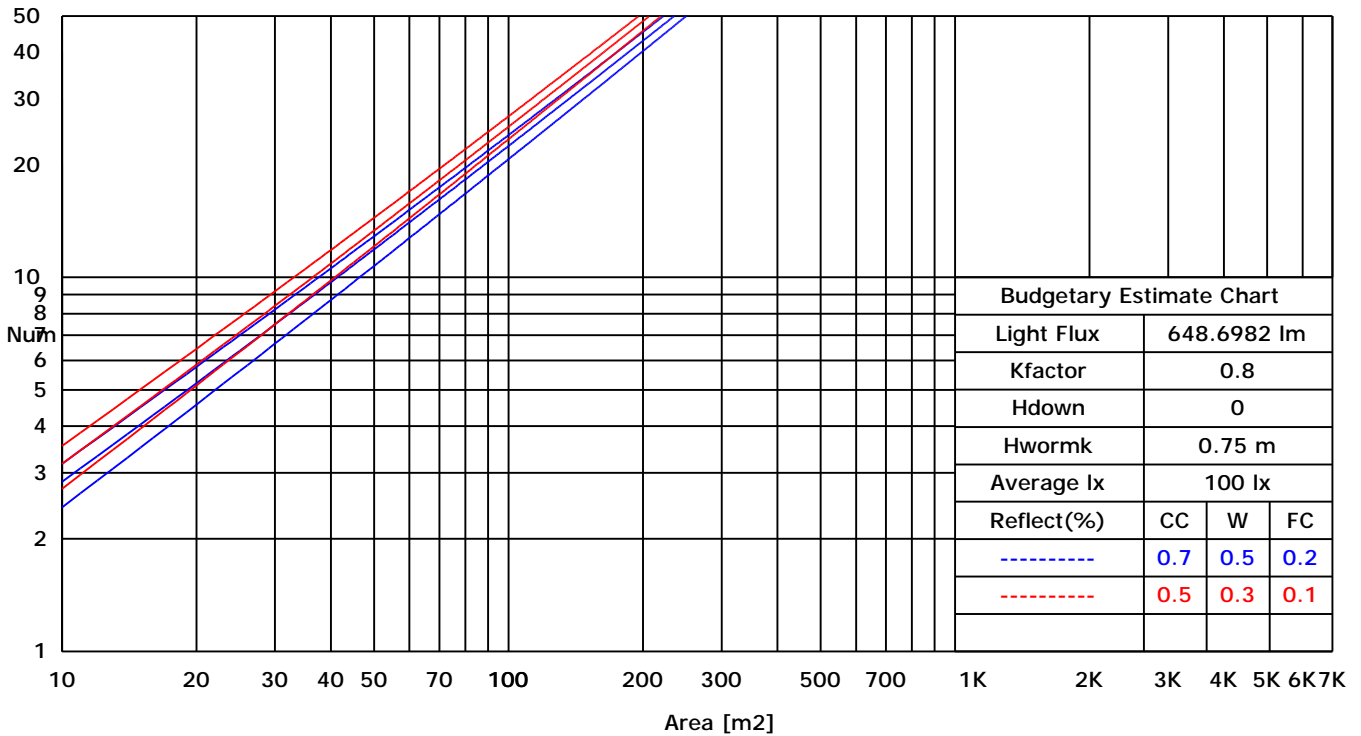

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2021/5/22 17:40:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-1800B Goniophotometer

Humidity:


Test Distance: 6.031 m

Remarks:

Report No.:

Test Time: 2021/5/22 17:40:12

ISOCANDELA DIAGRAM (RECTANGULAR)

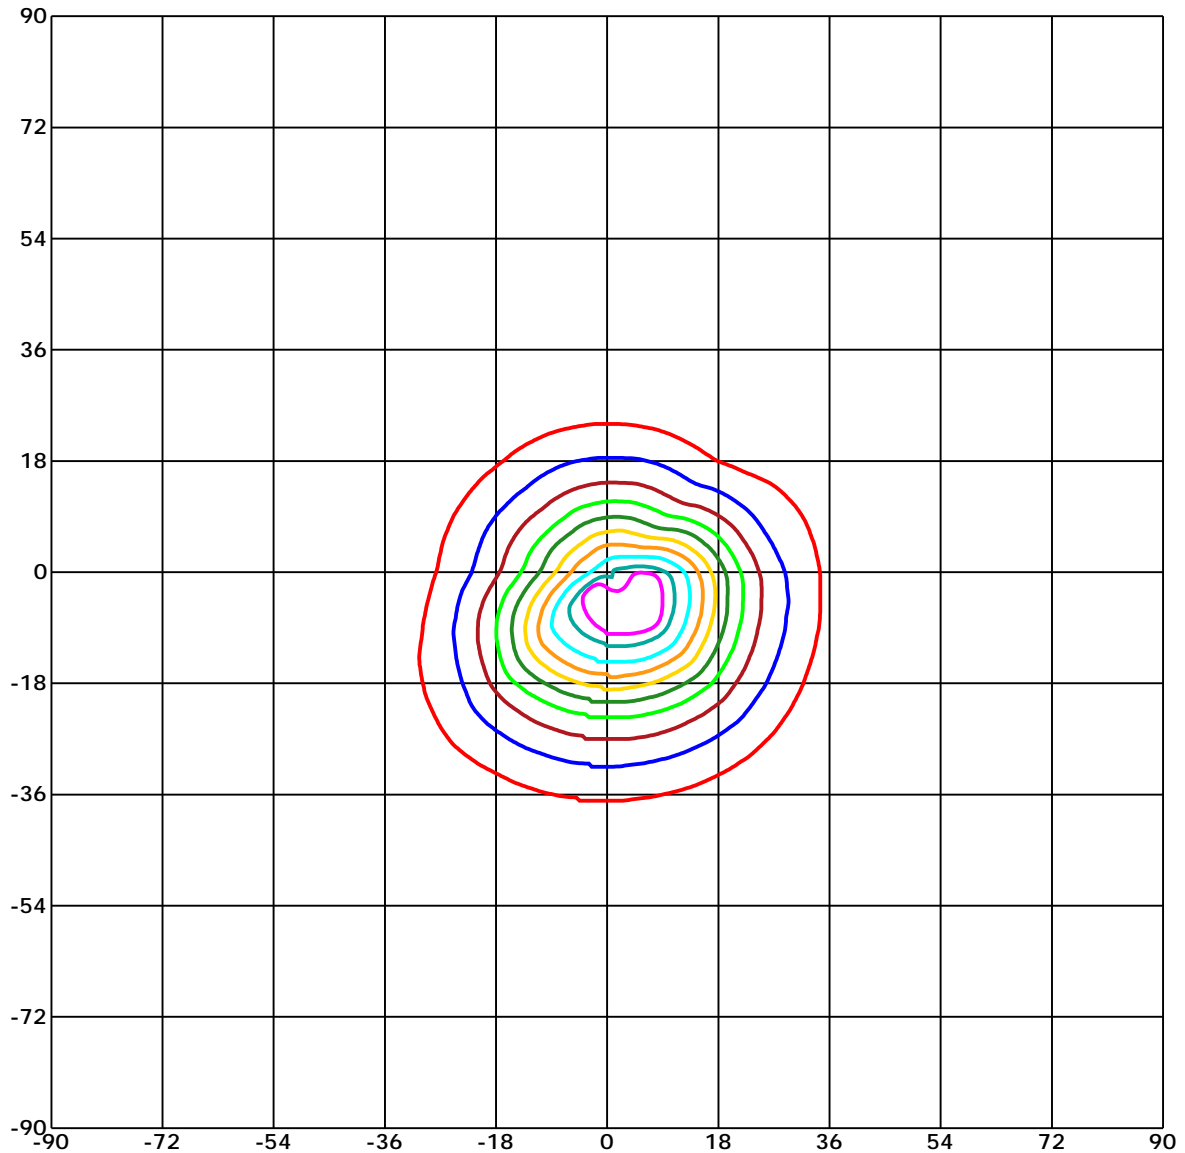

Unit of intensity:cd I_{max}(100%): 1585.025 cd

- | | |
|----------------------------------|---------------------------------|
| — 1505.773(95%I _{max}) | — 792.512(50%I _{max}) |
| — 1426.522(90%I _{max}) | — 634.01(40%I _{max}) |
| — 1268.02(80%I _{max}) | — 475.507(30%I _{max}) |
| — 1109.517(70%I _{max}) | — 317.005(20%I _{max}) |
| — 951.015(60%I _{max}) | — 158.503(10%I _{max}) |


C Range: 0 - 360 Deg
 C Interval: 45.0 Deg
 Test Speed: High
 Temperature:
 Operators:
 Test Date: 2021/5/22 17:40:12

G Range: 0 - 90 Deg
 G Interval: 1.0 Deg
 Test System: Huipu CPM-1800B Goniophotometer
 Humidity:
 Test Distance: 6.031 m
 Remarks:

Report No.:

Test Time: 2021/5/22 17:40:12

ISOCANDELA DIAGRAM (SPHERE)

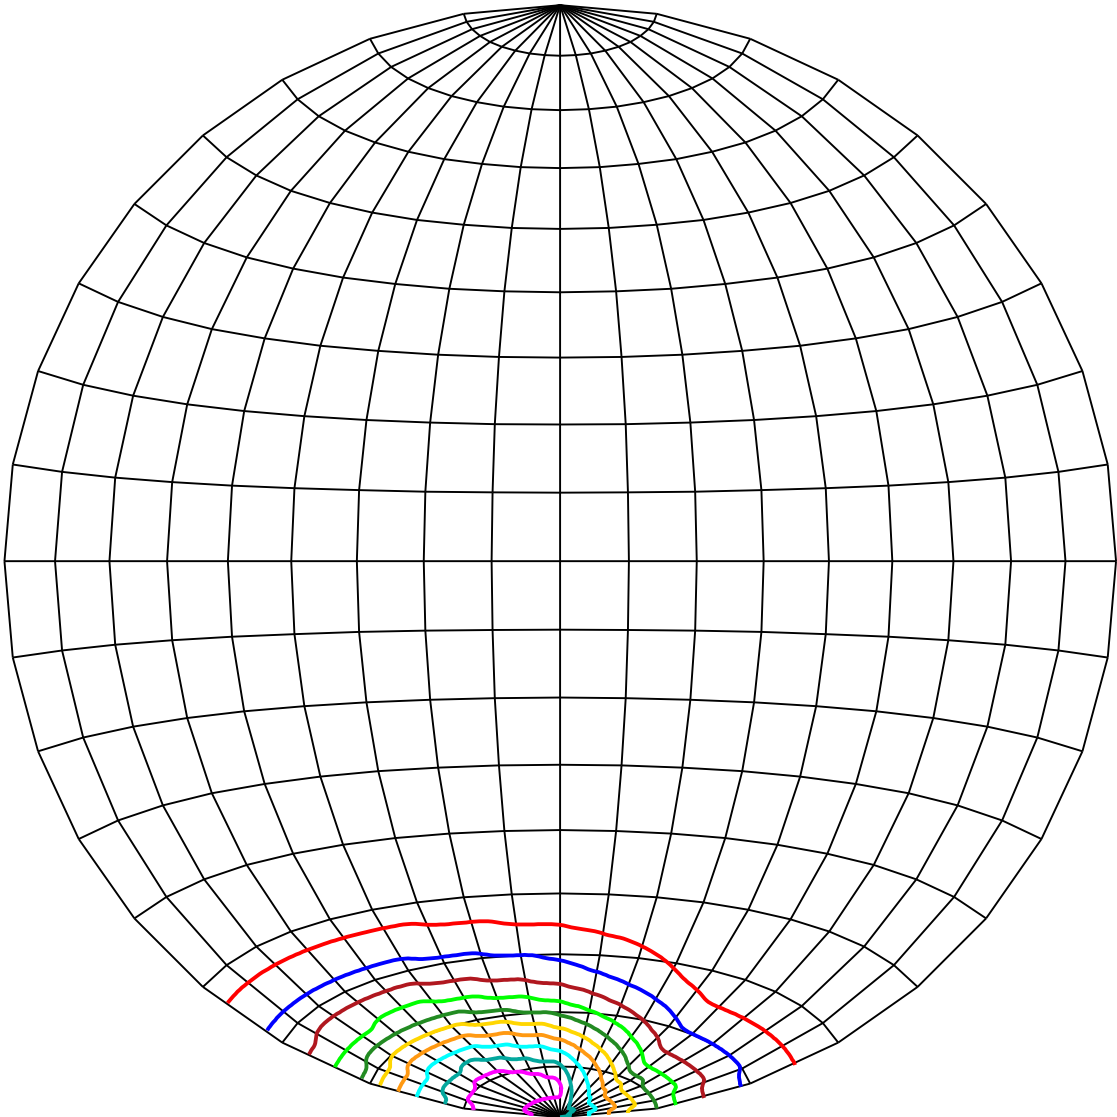

Unit of intensity:cd I_{max}(100%): 1585.025 cd

— 1505.773(95%I _{max})	— 792.512(50%I _{max})
— 1426.522(90%I _{max})	— 634.01(40%I _{max})
— 1268.02(80%I _{max})	— 475.507(30%I _{max})
— 1109.517(70%I _{max})	— 317.005(20%I _{max})
— 951.015(60%I _{max})	— 158.503(10%I _{max})

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2021/5/22 17:40:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-1800B Goniophotometer

Humidity:


Test Distance: 6.031 m

Remarks:

Report No.:

Test Time: 2021/5/22 17:40:12

ISOLX DIAGRAM

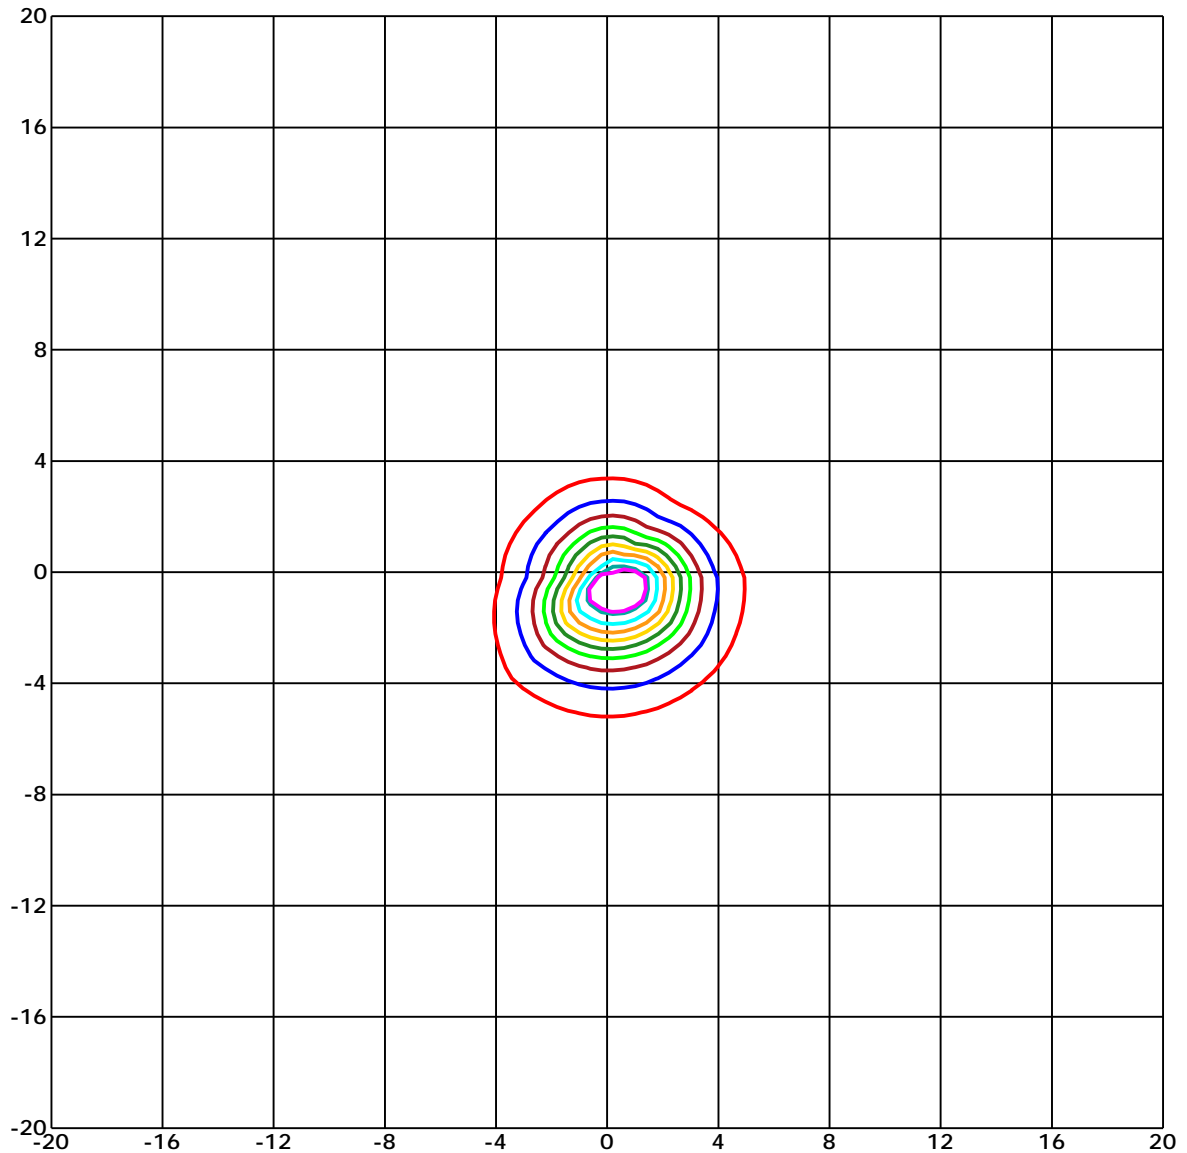

Unit of illumination: lx Height of plane: 8.0(m)/26.25(ft)

— 22.206(1%E _{max})	— 12.068(1%E _{max})
— 21.723(1%E _{max})	— 9.655(1%E _{max})
— 19.309(1%E _{max})	— 7.241(0%E _{max})
— 16.896(1%E _{max})	— 4.827(0%E _{max})
— 14.482(1%E _{max})	— 2.414(0%E _{max})


C Range: 0 - 360 Deg
 C Interval: 45.0 Deg
 Test Speed: High
 Temperature:
 Operators:
 Test Date: 2021/5/22 17:40:12

G Range: 0 - 90 Deg
 G Interval: 1.0 Deg
 Test System: Huipu CPM-1800B Goniophotometer
 Humidity:
 Test Distance: 6.031 m
 Remarks:

Report No.:

Test Time: 2021/5/22 17:40:12

UTILIZATION FACTOR DIAGRAM (ROAD)

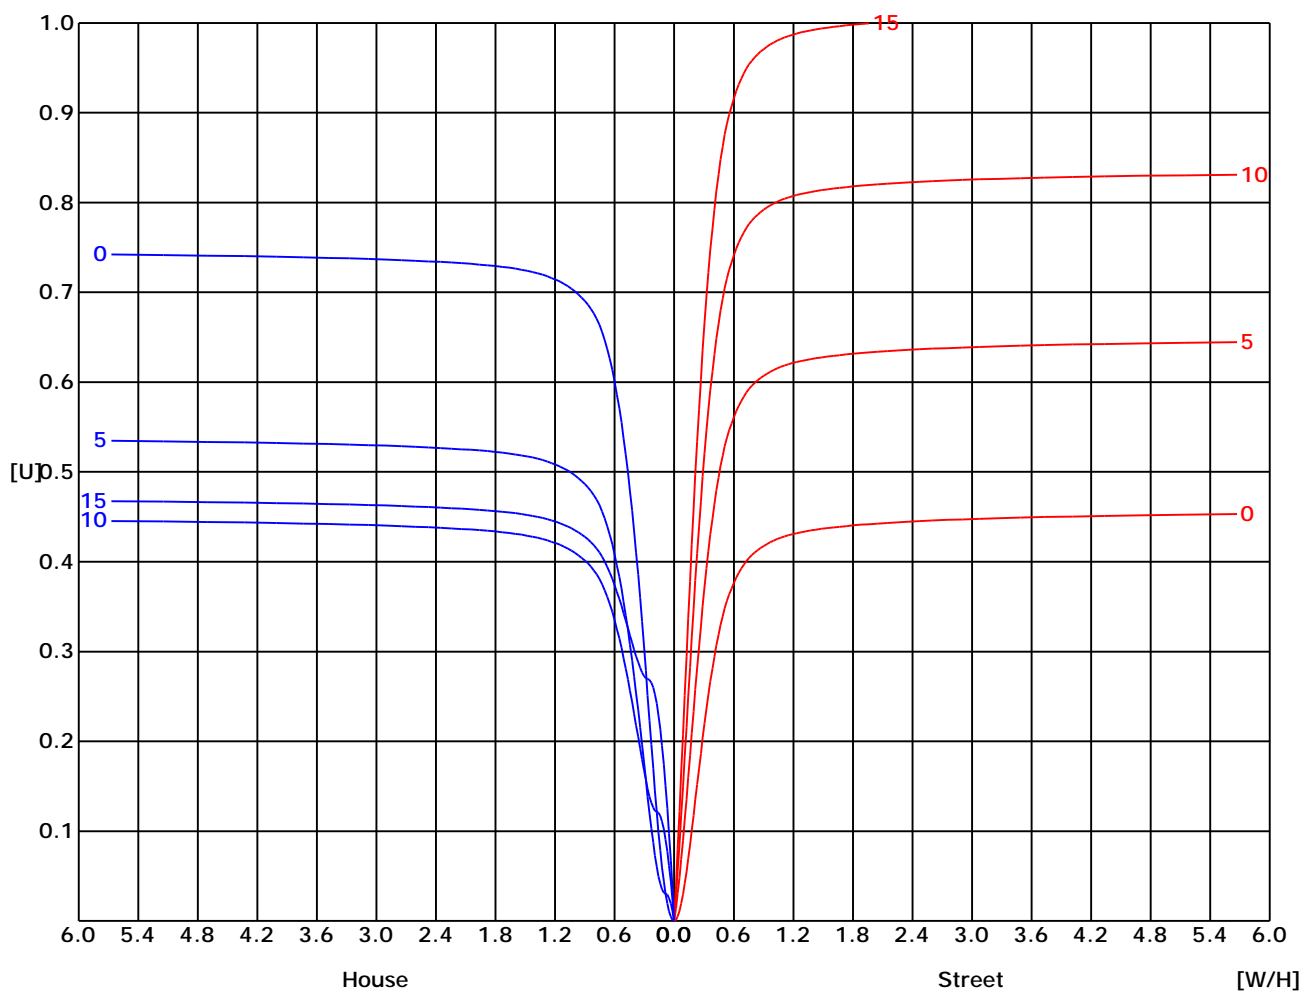

C Range: 0 - 360 Deg
 C Interval: 45.0 Deg
 Test Speed: High
 Temperature:
 Operators:
 Test Date: 2021/5/22 17:40:12


G Range: 0 - 90 Deg
 G Interval: 1.0 Deg
 Test System: Huipu CPM-1800B Goniophotometer
 Humidity:
 Test Distance: 6.031 m
 Remarks:

Report No.:

Test Time: 2021/5/22 17:40:12

BRIGHT LIMIT DIAGRAM

C/G	45	50	55	60	65	70	75	80	85
C0	606	392	342	353	364	428	559	838	1701
C90	544	356	308	324	368	457	587	833	1648
Dazzle	Quality	Illuminance	---	---	---	---	---	---	---
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
---	---	a	b	c	d	e	f	g	h

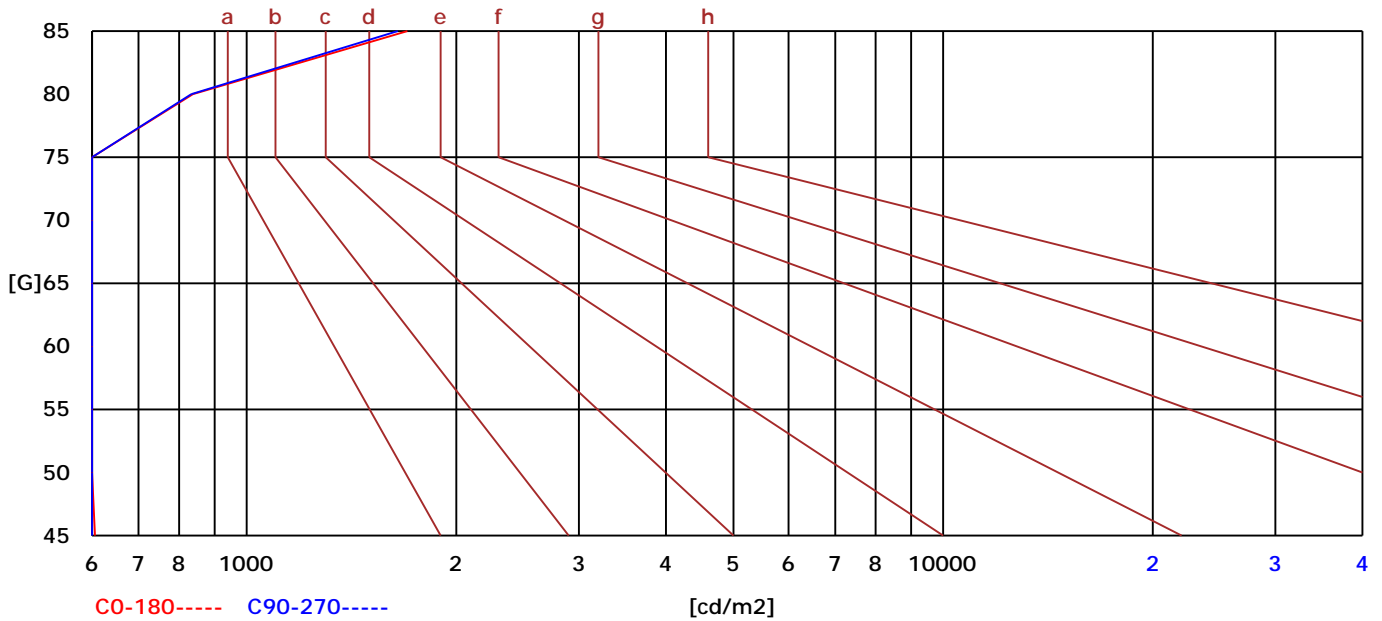


C Range: 0 - 360 Deg
 C Interval: 45.0 Deg
 Test Speed: High
 Temperature:
 Operators:
 Test Date: 2021/5/22 17:40:12

G Range: 0 - 90 Deg
 G Interval: 1.0 Deg
 Test System: Huipu CPM-1800B Goniophotometer
 Humidity:
 Test Distance: 6.031 m
 Remarks:

Report No.:

Test Time: 2021/5/22 17:40:12

LX-DISTANCE DIAGRAM

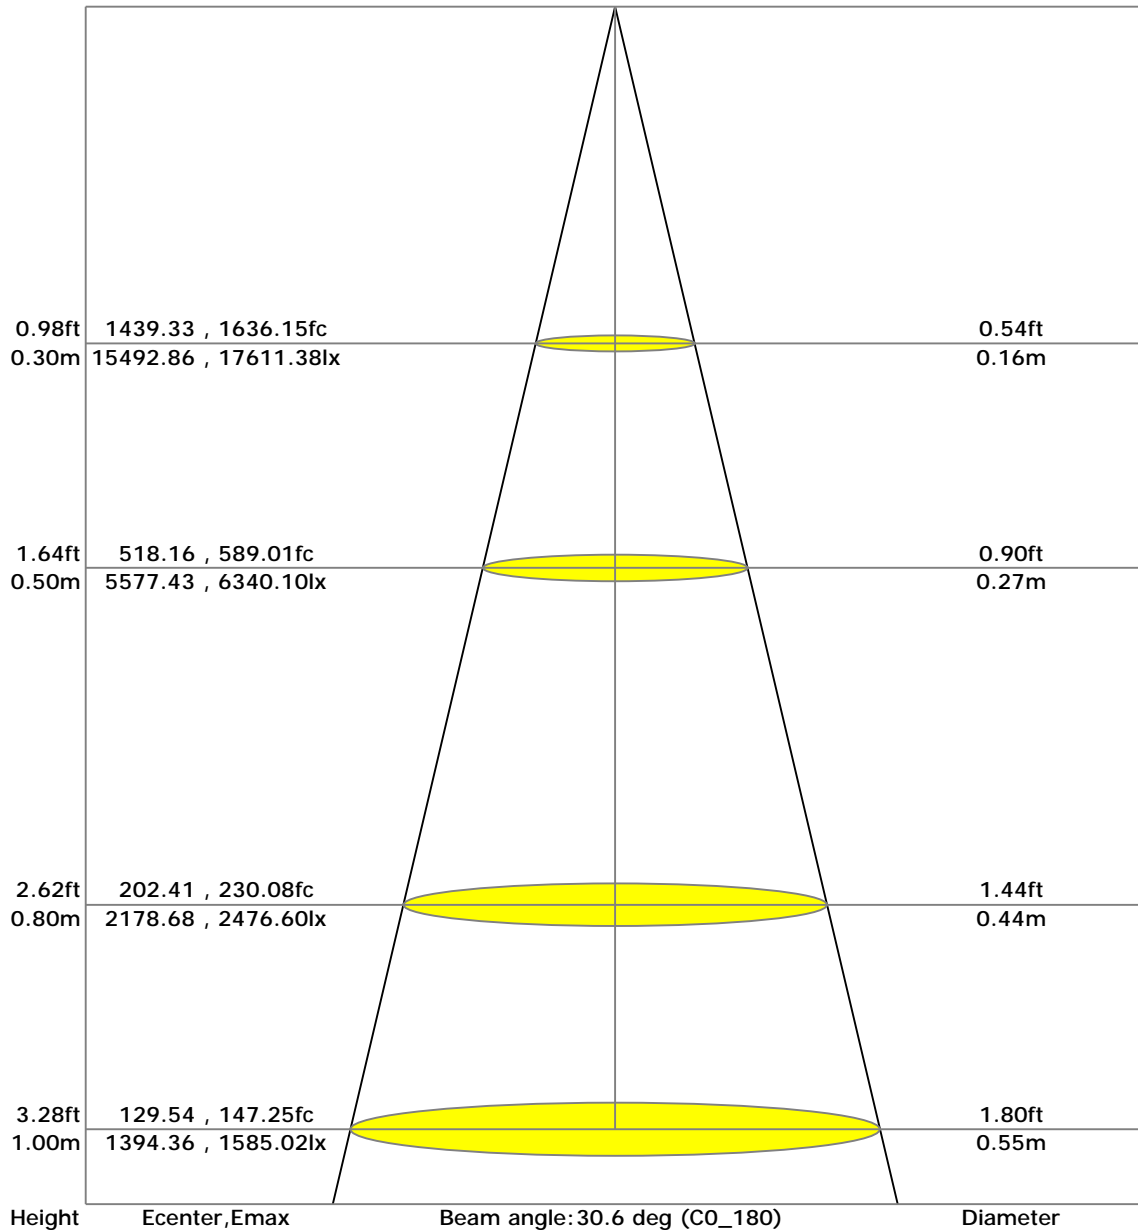

C Range: 0 - 360 Deg
 C Interval: 45.0 Deg
 Test Speed: High
 Temperature:
 Operators:
 Test Date: 2021/5/22 17:40:12

G Range: 0 - 90 Deg
 G Interval: 1.0 Deg
 Test System: Huipu CPM-1800B Goniophotometer
 Humidity:
 Test Distance: 6.031 m
 Remarks:

Report No.:

Test Time: 2021/5/22 17:40:12

UGR(Unified Glare Rating) TABLE

RHOCC		70	70	50	50	30	70	70	50	50	30
RHOW		70	70	50	50	30	70	70	50	50	30
RHOF		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewed Endwise					Viewed Crosswise				
2H	2H	5.67	5.73	5.87	5.92	6.16	2.64	2.70	2.84	2.88	3.13
	3H	5.73	5.78	5.93	5.97	6.22	2.81	2.86	3.01	3.05	3.30
	4H	5.75	5.80	5.96	6.00	6.25	2.86	2.92	3.07	3.11	3.36
	6H	5.75	5.81	5.97	6.01	6.26	2.89	2.95	3.11	3.15	3.40
	8H	5.74	5.80	5.96	6.00	6.25	2.88	2.94	3.10	3.14	3.39
	12H	5.73	5.79	5.95	5.99	6.25	2.87	2.93	3.09	3.13	3.39
4H	2H	7.21	7.26	7.42	7.46	7.71	5.70	5.76	5.91	5.95	6.20
	3H	7.50	7.55	7.72	7.76	8.02	6.17	6.23	6.39	6.43	6.69
	4H	7.63	7.69	7.86	7.90	8.16	6.37	6.43	6.60	6.64	6.90
	6H	7.75	7.80	7.99	8.03	8.29	6.54	6.59	6.78	6.82	7.08
	8H	7.80	7.85	8.04	8.07	8.34	6.61	6.66	6.85	6.88	7.15
	12H	7.81	7.87	8.06	8.10	8.37	6.64	6.69	6.88	6.92	7.19
8H	4H	8.85	8.91	9.07	9.11	9.37	8.17	8.22	8.39	8.43	8.68
	6H	10.25	10.30	10.50	10.53	10.81	9.85	9.90	10.11	10.14	10.42
	8H	10.43	10.48	10.69	10.72	11.00	10.06	10.11	10.32	10.35	10.63
	12H	10.58	10.63	10.85	10.88	11.16	10.22	10.27	10.49	10.52	10.80
12H	4H	10.97	11.02	11.22	11.25	11.52	10.76	10.81	11.01	11.05	11.32
	6H	11.53	11.57	11.79	11.82	12.10	11.38	11.43	11.64	11.67	11.95

C Range: 0 - 360 Deg
 C Interval: 45.0 Deg
 Test Speed: High
 Temperature:
 Operators:
 Test Date: 2021/5/22 17:40:12

G Range: 0 - 90 Deg
 G Interval: 1.0 Deg
 Test System: Huipu CPM-1800B Goniophotometer
 Humidity:
 Test Distance: 6.031 m
 Remarks:

Report No.:

Test Time: 2021/5/22 17:40:12

ZONAL LUMINOUS FLUX TABLE

Gamma [deg]	I _{mean} [cd]	Zonal Flux [lm]	Sum Flux [lm]	Zonal Flux [%]	Sum Flux [%]
0	1404.55	0.00	0.00	0.00	0.00
5	1351.81	32.61	32.61	5.03	5.03
10	1169.36	87.27	119.87	13.45	18.48
15	905.51	116.22	236.09	17.92	36.40
20	621.92	115.37	351.46	17.78	54.18
25	387.68	94.53	446.00	14.57	68.75
30	228.18	68.13	514.13	10.50	79.26
35	132.94	46.53	560.66	7.17	86.43
40	63.39	27.23	587.89	4.20	90.63
45	37.62	16.08	603.97	2.48	93.11
50	22.65	10.81	614.78	1.67	94.77
55	14.79	7.32	622.10	1.13	95.90
60	10.42	5.33	627.43	0.82	96.72
65	7.69	4.04	631.47	0.62	97.34
70	6.96	3.67	635.14	0.57	97.91
75	6.57	3.47	638.61	0.54	98.44
80	6.20	3.36	641.97	0.52	98.96
85	6.21	3.33	645.30	0.51	99.48
90	6.33	3.40	648.70	0.52	100.00


C Range: 0 - 360 Deg
 C Interval: 45.0 Deg
 Test Speed: High
 Temperature:
 Operators:
 Test Date: 2021/5/22 17:40:12

G Range: 0 - 90 Deg
 G Interval: 1.0 Deg
 Test System: Huipu CPM-1800B Goniophotometer
 Humidity:
 Test Distance: 6.031 m
 Remarks:

Report No.:

Test Time: 2021/5/22 17:40:12

SPACE ISOLX DIAGRAM

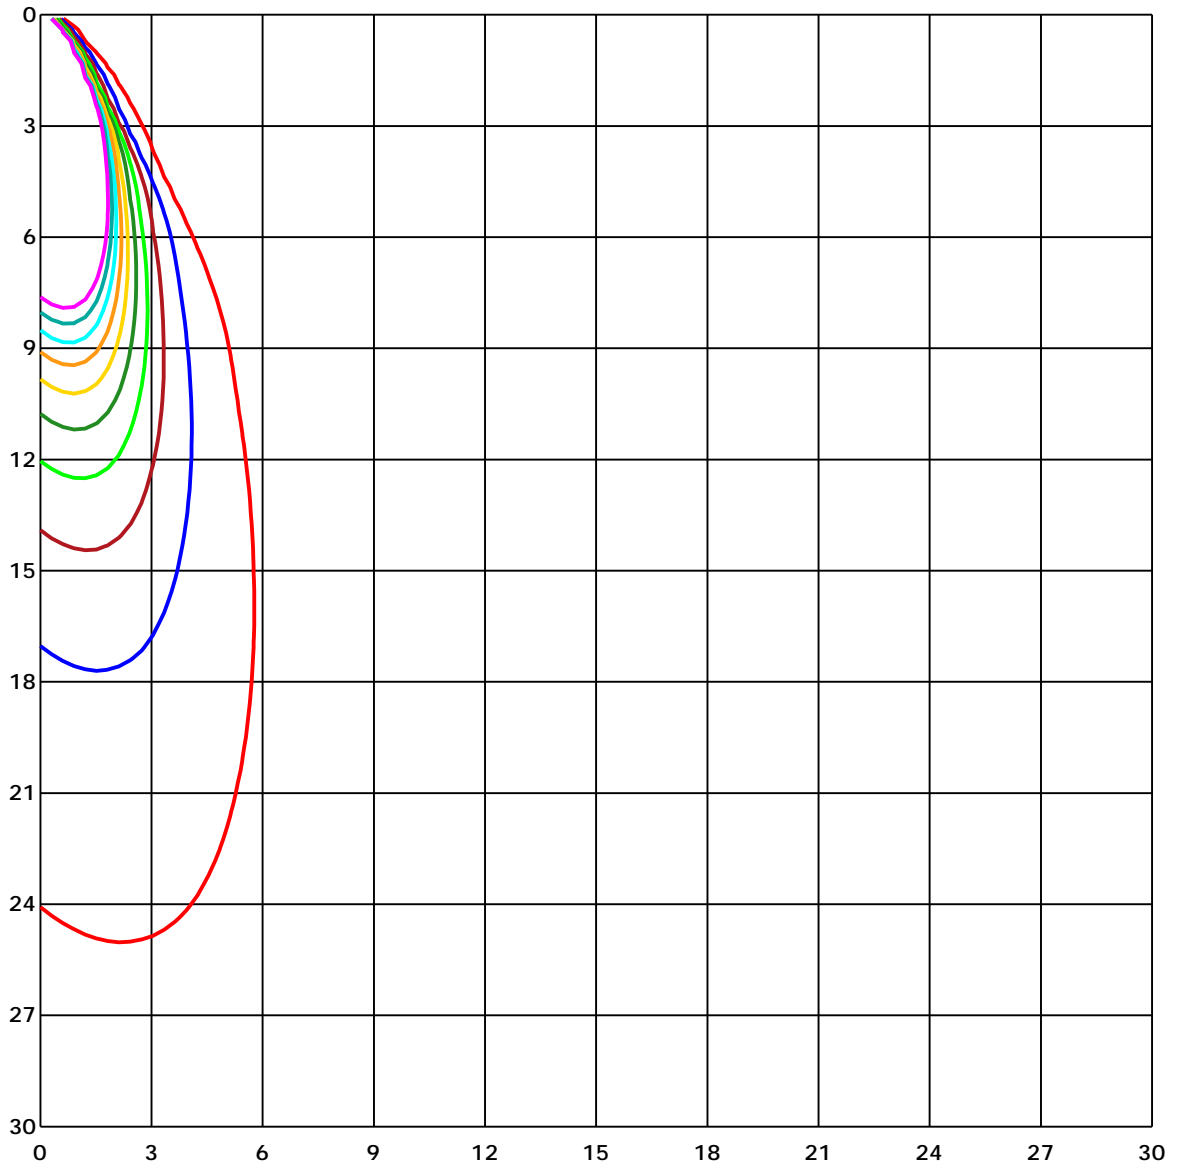

Unit of illumination: lx

- | | |
|----------|----------|
| — 24.047 | — 12.023 |
| — 21.642 | — 9.619 |
| — 19.238 | — 7.214 |
| — 16.833 | — 4.809 |
| — 14.428 | — 2.405 |

C Range: 0 - 360 Deg
 C Interval: 45.0 Deg
 Test Speed: High
 Temperature:
 Operators:
 Test Date: 2021/5/22 17:40:12

G Range: 0 - 90 Deg
 G Interval: 1.0 Deg
 Test System: Huipu CPM-1800B Goniophotometer
 Humidity:
 Test Distance: 6.031 m
 Remarks:

Report No.:

Test Time: 2021/5/22 17:40:12

LUMINOUS DISTRIBUTION INTENSITY DATA

GammaC	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G0	1394.36	1470.41	1406.94	1346.49	1394.36	1470.41	1406.94	1346.49	1394.36	
G1	1432.37	1435.71	1355.26	1294.04	1351.29	1496.24	1451.1	1394.94	1432.37	
G2	1464.12	1389.67	1297.97	1238.25	1305.1	1512.75	1488.56	1436.22	1464.12	
G3	1491.69	1331.4	1231.41	1175.79	1256.65	1519.63	1517.44	1473.8	1491.69	
G4	1512.24	1265.31	1159.79	1108.83	1201.44	1520.06	1539.7	1507.08	1512.24	
G5	1524.39	1194.38	1083.26	1040.01	1145.2	1514.86	1554.0	1537.96	1524.39	
G6	1526.06	1118.72	1008.77	968.98	1083.66	1504.17	1559.67	1564.8	1526.06	
G7	1518.03	1041.47	935.26	899.43	1020.44	1485.18	1557.16	1579.82	1518.03	
G8	1500.71	966.58	863.75	832.98	954.5	1461.5	1544.36	1585.03	1500.71	
G9	1471.65	892.85	795.88	768.82	891.36	1432.15	1523.34	1578.88	1471.65	
G10	1429.39	821.74	730.62	708.25	829.52	1398.43	1492.89	1563.17	1429.39	
G11	1375.26	753.9	669.08	649.48	770.23	1358.02	1454.3	1535.81	1375.26	
G12	1313.61	690.58	611.68	596.33	714.11	1312.08	1406.72	1497.37	1313.61	
G13	1244.43	631.03	557.45	545.99	660.64	1259.6	1350.93	1447.39	1244.43	
G14	1168.77	575.57	508.46	500.02	610.88	1202.56	1288.84	1388.97	1168.77	
G15	1094.06	524.39	462.63	457.28	563.82	1142.51	1220.9	1322.12	1094.06	
G16	1016.92	474.81	419.82	417.13	519.62	1079.22	1147.06	1248.65	1016.92	
G17	940.53	431.2	380.79	380.64	478.27	1011.71	1069.47	1170.34	940.53	
G18	867.53	390.17	344.12	345.18	439.49	941.73	992.87	1090.06	867.53	
G19	796.97	350.34	309.97	313.68	403.01	874.99	916.96	1009.46	796.97	
G20	727.6	314.95	278.11	283.45	368.71	809.7	842.51	932.57	727.6	
G21	664.35	280.62	248.1	254.36	336.89	746.59	772.67	858.51	664.35	
G22	605.28	248.68	219.18	227.08	306.59	690.94	708.36	787.87	605.28	
G23	549.92	216.56	191.39	199.58	278.18	634.2	647.8	721.53	549.92	
G24	498.86	185.54	162.88	172.81	250.14	581.42	591.72	658.06	498.86	
G25	452.23	155.89	137.49	146.47	223.15	532.72	550.83	601.35	452.23	
G26	408.65	129.78	118.76	121.52	196.78	487.51	509.59	546.9	408.65	
G27	368.82	104.97	100.86	98.13	168.81	445.64	470.08	496.85	368.82	
G28	337.36	88.1	86.82	79.84	143.13	406.72	431.24	451.24	337.36	
G29	309.93	78.64	74.78	70.35	117.48	370.93	394.21	409.09	309.93	
G30	281.89	71.25	67.87	62.02	94.1	338.52	356.82	370.31	281.89	
G31	253.52	65.0	62.31	54.74	77.18	308.01	322.26	334.09	253.52	
G32	224.89	59.98	57.65	51.87	66.89	279.56	290.11	300.55	224.89	
G33	194.78	55.69	53.9	47.9	61.25	254.1	260.21	269.92	194.78	
G34	166.33	50.38	47.18	44.3	55.36	226.6	233.62	239.73	166.33	
G35	138.91	44.38	41.57	39.46	51.4	200.56	206.27	210.09	138.91	
G36	113.12	38.3	36.01	33.79	49.43	174.23	179.61	182.67	113.12	

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2021/5/22 17:40:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-1800B Goniophotometer

Humidity:

Test Distance: 6.031 m

Remarks:

Report No.:

Test Time: 2021/5/22 17:40:12

LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 1)

GammaC	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G37	95.08	34.37	33.9	30.01	43.87	148.33	152.58	153.57	95.08	
G38	83.33	31.35	29.79	27.21	40.41	123.27	128.83	128.32	83.33	
G39	74.75	28.73	27.64	24.95	34.08	99.12	111.3	106.54	74.75	
G40	67.87	26.41	25.64	23.17	30.77	82.06	94.93	93.33	67.87	
G41	63.29	24.33	24.88	21.39	28.44	70.67	79.62	83.8	63.29	
G42	57.43	22.88	23.32	19.82	27.53	63.87	69.07	76.09	57.43	
G43	52.05	20.44	20.51	18.3	24.62	58.71	61.98	69.84	52.05	
G44	46.05	18.77	19.93	17.82	22.88	54.49	56.6	64.45	46.05	
G45	40.19	17.13	17.5	15.39	21.28	51.54	52.27	59.47	40.19	
G46	36.95	15.02	16.15	15.31	19.79	46.74	47.94	51.65	36.95	
G47	33.1	14.08	15.31	12.69	18.26	41.54	42.81	46.78	33.1	
G48	30.41	11.46	13.46	12.8	16.88	36.41	37.28	41.17	30.41	
G49	28.33	11.35	12.15	10.26	15.35	33.28	32.92	37.57	28.33	
G50	25.68	10.08	10.77	9.17	12.91	30.23	30.15	32.81	25.68	
G51	23.46	9.2	10.08	8.18	12.84	28.33	27.83	31.72	23.46	
G52	20.84	8.33	9.53	7.57	11.78	26.19	25.82	29.21	20.84	
G53	19.31	8.15	9.31	7.27	10.66	24.3	23.5	26.88	19.31	
G54	16.66	8.0	9.17	7.24	9.78	22.51	21.68	23.24	16.66	
G55	14.99	7.86	9.02	7.06	9.35	20.73	19.93	21.02	14.99	
G56	14.19	7.71	7.31	6.98	7.6	19.1	18.22	20.26	14.19	
G57	12.59	7.57	8.73	6.87	8.84	16.37	14.66	18.3	12.59	
G58	11.17	7.46	8.55	6.77	8.66	16.0	14.95	16.44	11.17	
G59	9.89	7.24	8.37	6.66	8.4	14.62	13.49	14.66	9.89	
G60	8.91	7.06	8.18	6.47	8.15	13.24	12.04	13.02	8.91	
G61	8.33	6.8	7.89	6.4	7.82	11.97	10.77	11.49	8.33	
G62	8.15	6.55	7.67	6.18	7.64	10.84	9.49	10.4	8.15	
G63	8.04	6.37	7.49	6.18	7.31	10.04	8.75	9.6	8.04	
G64	7.93	6.33	7.46	6.18	7.06	9.53	8.0	9.06	7.93	
G65	7.75	6.15	7.35	6.22	6.77	9.38	7.82	8.91	7.75	
G66	7.64	6.77	7.24	6.22	6.62	9.22	7.67	8.73	7.64	
G67	7.49	5.97	7.02	6.2	6.58	9.06	7.49	8.98	7.49	
G68	7.35	5.89	6.95	6.18	6.51	8.84	7.35	8.26	7.35	
G69	7.09	5.86	6.44	6.18	6.4	8.62	7.02	8.07	7.09	
G70	6.84	5.86	6.77	6.26	6.26	8.44	7.06	8.55	6.84	
G71	6.66	6.95	6.58	6.18	6.15	8.18	6.87	7.6	6.66	
G72	5.46	5.82	6.69	6.18	6.15	8.0	6.66	7.35	5.46	
G73	6.47	5.78	6.58	6.22	6.15	7.82	6.44	7.13	6.47	

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2021/5/22 17:40:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-1800B Goniophotometer

Humidity:

Test Distance: 6.031 m

Remarks:

Report No.:

Test Time: 2021/5/22 17:40:12

LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 2)

Gamma\C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G74	6.29	5.78	6.55	6.15	6.15	7.46	6.22	7.93	6.29	
G75	5.13	5.78	6.44	6.07	6.15	7.42	6.18	6.87	5.13	
G76	6.15	5.78	6.44	5.97	6.91	7.31	6.73	6.73	6.15	
G77	5.97	5.78	6.44	6.0	6.11	6.04	5.97	7.82	5.97	
G78	6.0	5.82	6.4	5.82	6.29	7.02	5.93	6.51	6.0	
G79	6.04	5.78	6.37	5.89	6.33	6.95	5.82	6.4	6.04	
G80	5.93	5.82	6.29	5.78	5.78	6.77	6.8	6.37	5.93	
G81	5.82	5.82	6.26	5.86	5.71	6.8	5.78	6.29	5.82	
G82	5.86	5.89	6.24	5.78	6.55	6.62	5.75	6.33	5.86	
G83	6.07	5.86	6.22	5.71	6.55	6.47	5.78	6.26	6.07	
G84	5.82	6.44	6.26	5.75	6.58	6.8	5.75	6.29	5.82	
G85	5.78	5.93	6.26	5.75	6.55	6.62	5.71	6.26	5.78	
G86	5.82	5.93	7.42	5.75	6.57	6.62	5.86	6.26	5.82	
G87	5.89	5.86	6.18	5.82	6.58	6.62	6.0	6.47	5.89	
G88	6.84	5.97	6.77	5.82	5.97	6.51	5.86	6.69	6.84	
G89	6.11	6.07	6.66	6.37	5.93	6.51	6.26	6.77	6.11	
G90	5.83	6.15	0.0	6.07	6.95	6.51	5.4	6.77	5.83	

C Range: 0 - 360 Deg G Range: 0 - 90 Deg
C Interval: 45.0 Deg G Interval: 1.0 Deg
Test Speed: High Test System: Huipu CPM-1800B Goniophotometer
Temperature: Humidity:
Operators: Test Distance: 6.031 m
Test Date: 2021/5/22 17:40:12 Remarks: