

LAMPARA LED TIPO PANEL 40W

Marca: DRITE, Item No PNL606, Máx.40W, CCT: 3500K-4000K-5000K, COLOR BLANCO
85-265V, 50-60Hz, 130lm/W, IRC(Ra)>80, PF>0.9, 96LED, 50000Hrs, IP20, -20°C~40°C
SMD 2835, PRODUCTO DIMERIZABLE C.F: 101122XS



Light Output Ratio:	100.0%	
Luminaire Power:	40.74 W	
SHR Nominal:	1.25	Calculated using the TM5
SHR Maximum:	1.35	fine grid method.



H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.9DEG
Operators:CB
Test Date:2023-06-30

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
Humidity:51.3%
Test Distance:13.200m [K=1.0000]
Remarks: LAMPARA LED TIPO PANEL 40 W
QTEST 27752-02

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.30V I:0.3402A P:40.738W PF:0.9954 Freq:60.00Hz Lamp Flux:4872.52x1 lm		
NAME: LAMPARA LED TIPO PANEL 40 W	TYPE:INTERIOR	WEIGHT:NA
SPEC.:NA	DIM.: NA	SERIAL No.:NA
MFR.: DRITÈ	SUR.:NA	Shielding Angle:NA

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	PNL606	I _{max} (cd)	1669	S/MH (C0/180)	1.26
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	1.27
RATED VOLTAGE (V)	85-265	TOTAL FLUX (lm)	4872.5	η UP, DN (C0-180)	0.0, 49.6
NOMINAL FLUX (lm)	4872.52	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

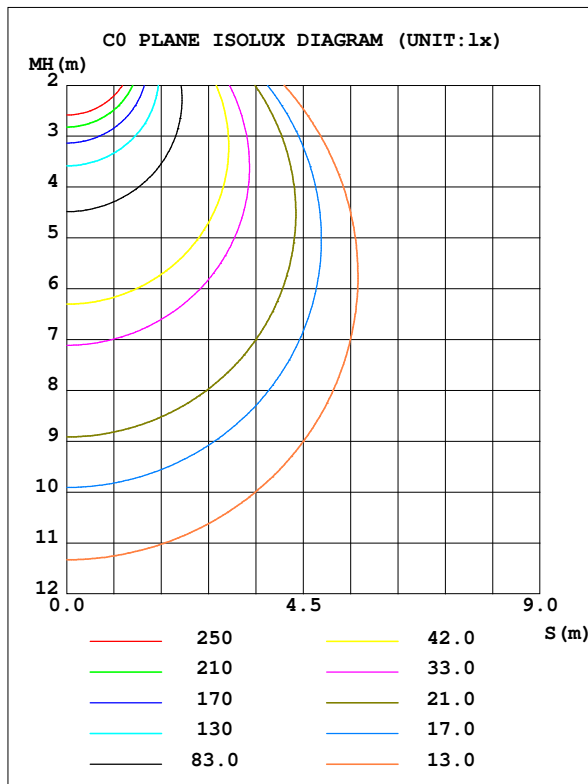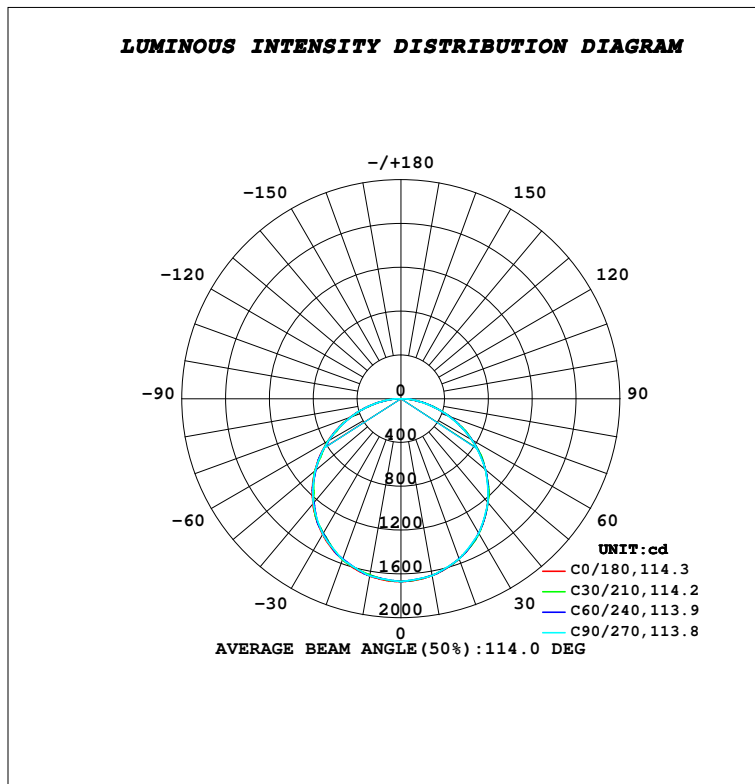

H(β) Range: -90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature: 24.9DEG
 Operators: CB
 Test Date: 2023-06-30

V(B) Range: -90 - 90DEG
 V(B) Interval: 5.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.417
 Humidity: 51.3%
 Test Distance: 13.200m [K=1.0000]
 Remarks: LAMPARA LED TIPO PANEL 40 W
 QTEST 27752-02

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	1639	1636	1640	1634	1644	1636	1642	1637	0- 10	157.5	157.5	3.23,3.23
20	1555	1555	1557	1547	1564	1551	1561	1558	10- 20	452.4	609.9	12.5,12.5
30	1420	1419	1420	1416	1431	1423	1429	1424	20- 30	688.7	1299	26.7,26.7
40	1235	1233	1235	1238	1251	1249	1247	1241	30- 40	835.2	2134	43.8,43.8
50	1007	1006	1006	1012	1028	1027	1023	1017	40- 50	871.8	3006	61.7,61.7
60	746.6	745.1	743.7	747.4	769.0	766.4	763.7	758.5	50- 60	792.1	3798	77.9,77.9
70	466.8	470.4	462.5	462.7	491.2	483.4	484.6	485.3	60- 70	608.8	4406	90.4,90.4
80	198.9	205.7	195.6	197.3	220.6	216.1	215.3	219.8	70- 80	358.6	4765	97.8,97.8
90	0	1.694	1.485	1.407	3.106	2.382	3.650	3.097	80- 90	107.5	4873	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.9DEG
Operators:CB
Test Date:2023-06-30

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
Humidity:51.3%
Test Distance:13.200m [K=1.0000]
Remarks: LAMPARA LED TIPO PANEL 40 W
QTEST 27752-02

LUMINANCE LIMITATION CURVES

Test:U:120.30V I:0.3402A P:40.738W PF:0.9954 Freq:60.00Hz Lamp Flux:4872.52x1 lm		
NAME: LAMPARA LED TIPO PANEL 40 W	TYPE:INTERIOR	WEIGHT:NA
SPEC.:NA	DIM.: NA	SERIAL No.:NA
MFR.: DRITÈ	SUR.:NA	Shielding Angle:NA

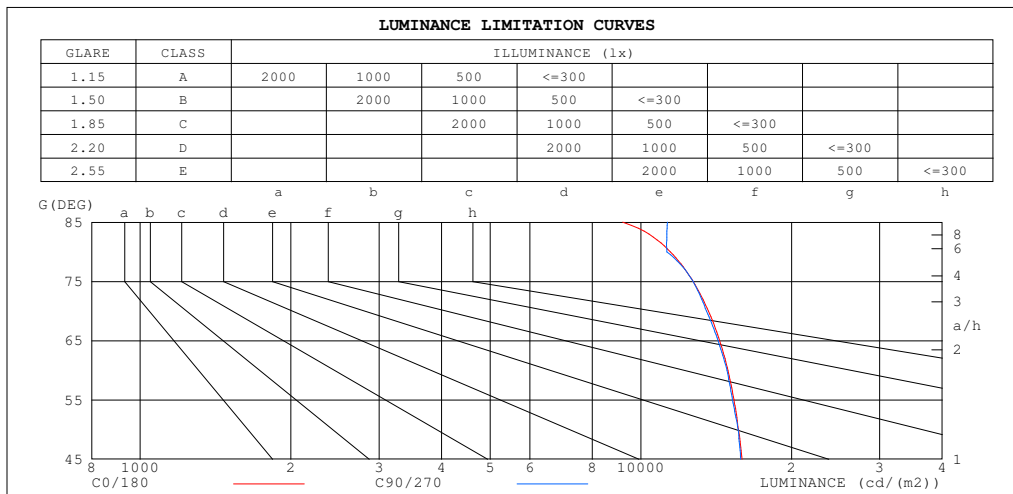

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9195	11302
80	11456	11266
75	12727	12710
70	13647	13523
65	14368	14267
60	14932	14875
55	15349	15252
50	15669	15657
45	15925	15847


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.9DEG
Operators:CB
Test Date:2023-06-30

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
Humidity:51.3%
Test Distance:13.200m [K=1.0000]
Remarks: LAMPARA LED TIPO PANEL 40 W
QTEST 27752-02

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.30V I:0.3402A P:40.738W PF:0.9954 Freq:60.00Hz Lamp Flux:4872.52x1 lm		
NAME: LAMPARA LED TIPO PANEL 40 W	TYPE:INTERIOR	WEIGHT:NA
SPEC.:NA	DIM.: NA	SERIAL No.:NA
MFR.: DRITÈ	SUR.:NA	Shielding Angle:NA

ρcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρw	20%			20%			20%			20%			20%			0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization (CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.85	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.64	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.36	.48	.41	.35	.47	.40	.35	.46	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

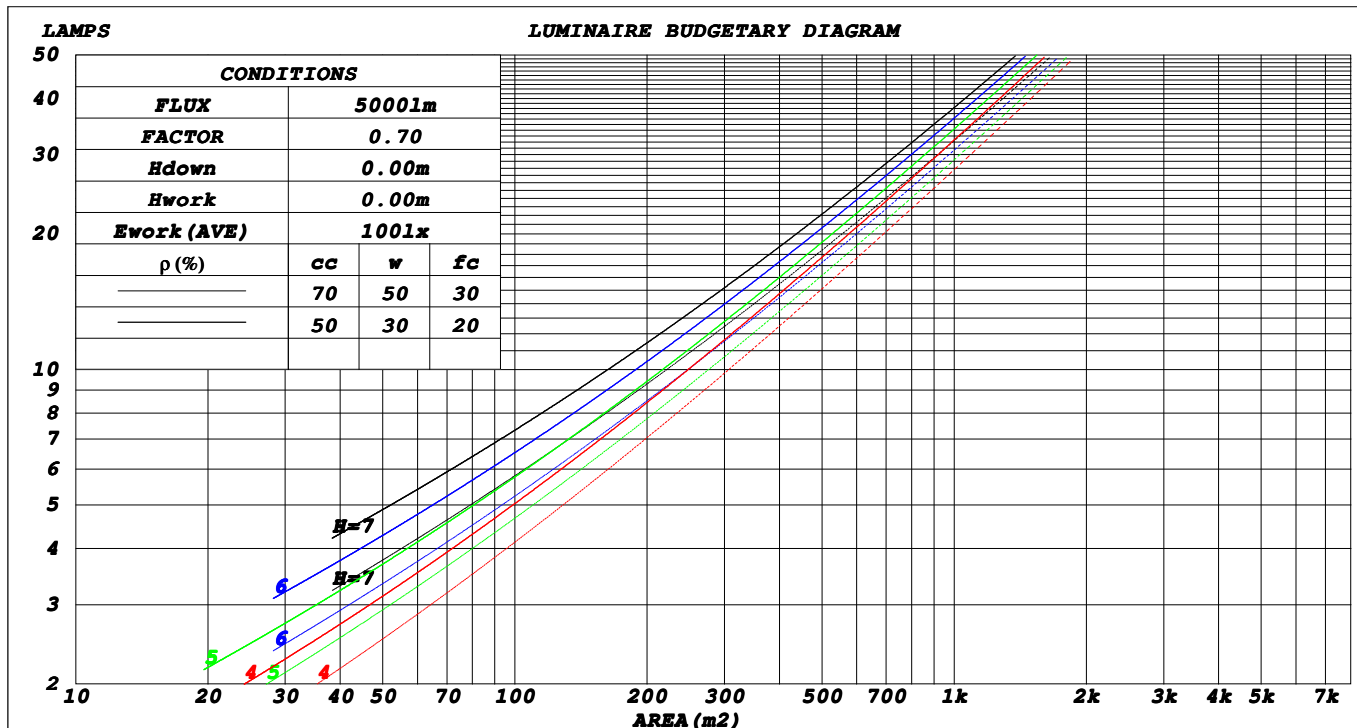

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:24.9DEG
 Operators:CB
 Test Date:2023-06-30

V(B) Range:-90 - 90DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
 Humidity:51.3%
 Test Distance:13.200m [K=1.0000]
 Remarks: LAMPARA LED TIPO PANEL 40 W
 QTEST 27752-02

WEC AND CCEC

Test:U:120.30V I:0.3402A P:40.738W PF:0.9954 Freq:60.00Hz Lamp Flux:4872.52x1 lm		
NAME: LAMPARA LED TIPO PANEL 40 W	TYPE:INTERIOR	WEIGHT:NA
SPEC.:NA	DIM.: NA	SERIAL No.:NA
MFR.: DRITÈ	SUR.:NA	Shielding Angle:NA

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.316	.180	.057	.309	.176	.056	.295	.169	.054	.283	.163	.052	.272	.158	.051	
2.0	.296	.162	.050	.289	.159	.049	.278	.154	.048	.267	.150	.047	.257	.145	.046	
3.0	.273	.145	.044	.267	.143	.043	.257	.139	.042	.247	.136	.042	.239	.132	.041	
4.0	.251	.131	.038	.247	.129	.038	.237	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.232	.118	.034	.228	.117	.034	.220	.114	.034	.212	.112	.033	.205	.110	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.105	.030	.197	.102	.030	.191	.100	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.093	.027	
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.149	.075	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.173	.132	.098	.148	.114	.084	.101	.079	.059	.058	.046	.034	.019	.015	.011	
3.0	.165	.114	.074	.142	.099	.064	.097	.069	.045	.056	.040	.026	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.050	.093	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.010	.006	
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.015	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.074	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.118	.060	.022	.101	.052	.019	.070	.037	.014	.041	.022	.008	.013	.007	.003	

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:24.9DEG
 Operators:CB
 Test Date:2023-06-30

V(B) Range:-90 - 90DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
 Humidity:51.3%
 Test Distance:13.200m [K=1.0000]
 Remarks: LAMPARA LED TIPO PANEL 40 W
 QTEST 27752-02

UGR(Unified Glare Rating) Table

Test:U:120.30V I:0.3402A P:40.738W PF:0.9954 Freq:60.00Hz Lamp Flux:4872.52x1 lm										
NAME: LAMPARA LED TIPO PANEL 40 W					TYPE:INTERIOR			WEIGHT:NA		
SPEC.:NA					DIM.: NA			SERIAL No.:NA		
MFR.: DRITÈ					SUR.:NA			Shielding Angle:NA		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.9	18.4	17.2	18.6	18.8	16.8	18.4	17.1	18.6	18.8
3H	18.5	19.9	18.7	20.1	20.3	18.3	19.8	18.6	20.0	20.2
4H	19.1	20.4	19.4	20.7	20.9	19.0	20.3	19.3	20.6	20.8
6H	19.5	20.8	19.9	21.1	21.4	19.4	20.7	19.7	21.0	21.2
8H	19.7	20.9	20.0	21.2	21.5	19.6	20.8	19.9	21.1	21.4
12H	19.7	20.9	20.1	21.2	21.5	19.7	20.9	20.0	21.2	21.5
4H 2H	17.5	18.9	17.8	19.1	19.4	17.4	18.8	17.8	19.1	19.3
3H	19.2	20.4	19.6	20.7	21.0	19.2	20.3	19.5	20.6	20.9
4H	20.0	21.1	20.4	21.4	21.7	19.9	21.0	20.3	21.3	21.6
6H	20.6	21.6	21.0	21.9	22.3	20.5	21.4	20.9	21.8	22.2
8H	20.8	21.7	21.2	22.1	22.4	20.7	21.6	21.1	21.9	22.3
12H	20.9	21.7	21.3	22.1	22.5	20.9	21.7	21.3	22.1	22.5
8H 4H	20.3	21.2	20.7	21.5	21.9	20.2	21.1	20.6	21.5	21.8
6H	21.0	21.8	21.5	22.2	22.6	20.9	21.7	21.3	22.1	22.5
8H	21.3	22.0	21.8	22.4	22.8	21.2	21.9	21.7	22.3	22.7
12H	21.5	22.0	22.0	22.5	23.0	21.5	22.0	21.9	22.5	23.0
12H 4H	20.3	21.1	20.7	21.5	21.9	20.2	21.0	20.6	21.4	21.8
6H	21.1	21.8	21.5	22.2	22.6	21.0	21.6	21.4	22.1	22.5
8H	21.4	22.0	21.9	22.4	22.9	21.3	21.9	21.8	22.3	22.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				

CIE Pub.117, 4873 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 5.5)
 Area: 0.1 m2

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:24.9DEG
 Operators:CB
 Test Date:2023-06-30

V(B) Range:-90 - 90DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
 Humidity:51.3%
 Test Distance:13.200m [K=1.0000]
 Remarks: LAMPARA LED TIPO PANEL 40 W
 QTEST 27752-02

UTILIZATION FACTORS TABLE

Test:U:120.30V I:0.3402A P:40.738W PF:0.9954 Freq:60.00Hz Lamp Flux:4872.52x1 lm		
NAME: LAMPARA LED TIPO PANEL 40 W	TYPE:INTERIOR	WEIGHT:NA
SPEC.:NA	DIM.: NA	SERIAL No.:NA
MFR.: DRITÈ	SUR.:NA	Shielding Angle:NA


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	99	91	84	96	89	84	93	87	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	104	98	94	99	95	91	82
5.00	108	103	99	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:24.9DEG
 Operators:CB
 Test Date:2023-06-30

V(B) Range:-90 - 90DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
 Humidity:51.3%
 Test Distance:13.200m [K=1.0000]
 Remarks: LAMPARA LED TIPO PANEL 40 W
 QTEST 27752-02

ISOCANDELA DIAGRAM

Test:U:120.30V I:0.3402A P:40.738W PF:0.9954 Freq:60.00Hz Lamp Flux:4872.52x1 lm		
NAME: LAMPARA LED TIPO PANEL 40 W	TYPE:INTERIOR	WEIGHT:NA
SPEC.:NA	DIM.: NA	SERIAL No.:NA
MFR.: DRITÈ	SUR.:NA	Shielding Angle:NA

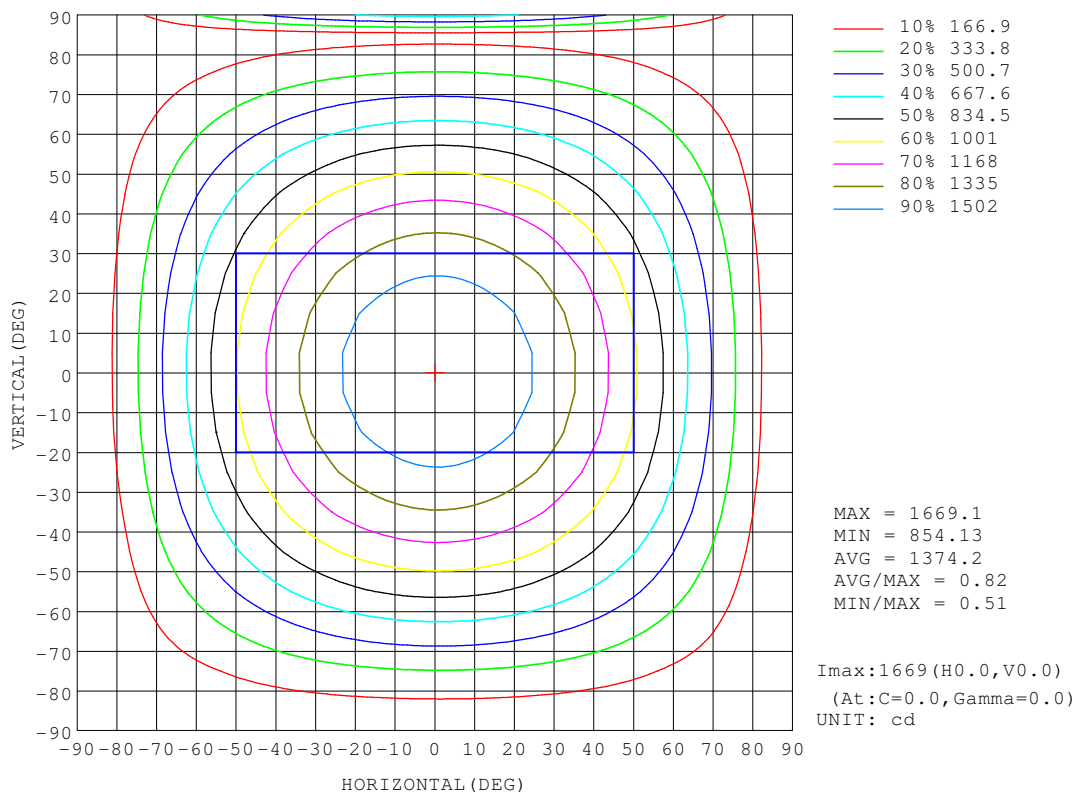


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.9DEG
Operators:CB
Test Date:2023-06-30

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
Humidity:51.3%
Test Distance:13.200m [K=1.0000]
Remarks: LAMPARA LED TIPO PANEL 40 W
QTEST 27752-02

AAI Figure

Test:U:120.30V I:0.3402A P:40.738W PF:0.9954 Freq:60.00Hz Lamp Flux:4872.52x1 lm		
NAME: LAMPARA LED TIPO PANEL 40 W	TYPE:INTERIOR	WEIGHT:NA
SPEC.:NA	DIM.: NA	SERIAL No.:NA
MFR.: DRITÈ	SUR.:NA	Shielding Angle:NA

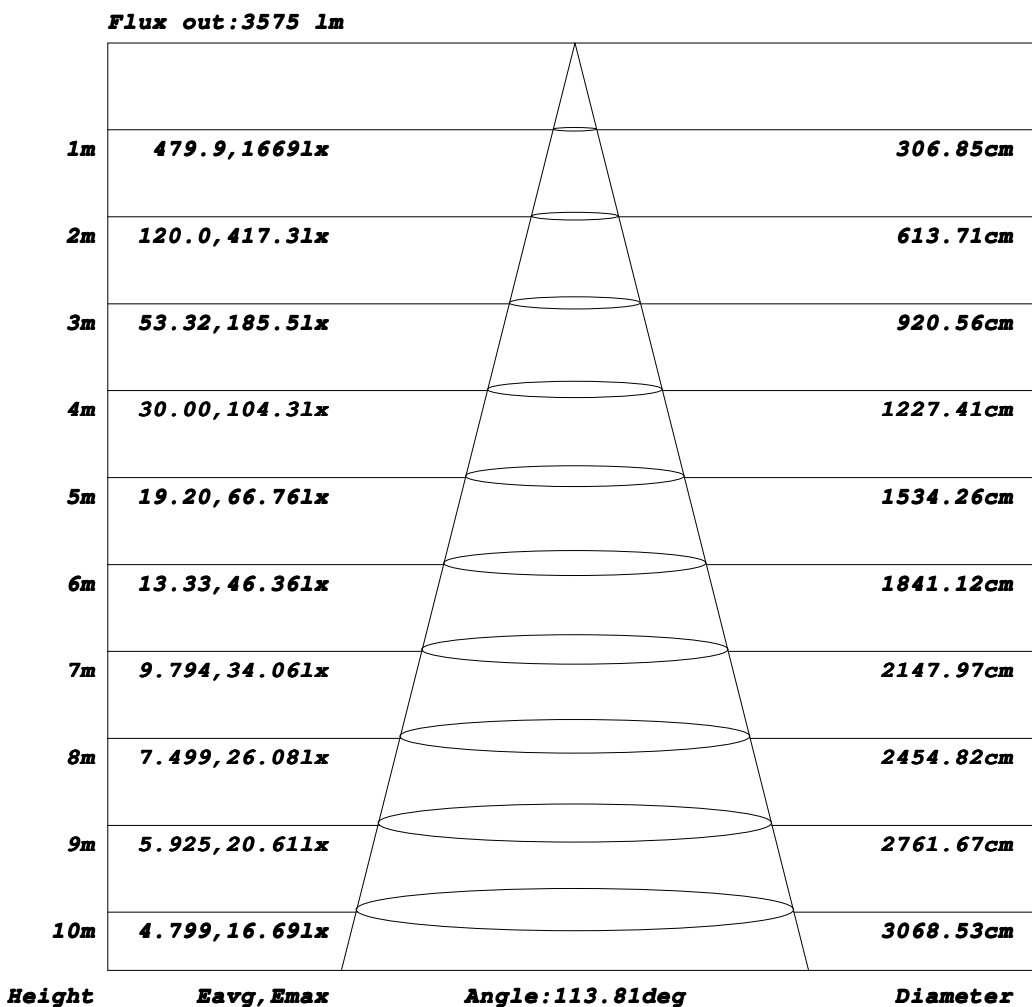


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:24.9DEG
 Operators:CB
 Test Date:2023-06-30

V(B) Range:-90 - 90DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
 Humidity:51.3%
 Test Distance:13.200m [K=1.0000]
 Remarks: LAMPARA LED TIPO PANEL 40 W
 QTEST 27752-02

ISOLUX DIAGRAM

Test:U:120.30V I:0.3402A P:40.738W PF:0.9954 Freq:60.00Hz Lamp Flux:4872.52x1 lm		
NAME: LAMPARA LED TIPO PANEL 40 W	TYPE:INTERIOR	WEIGHT:NA
SPEC.:NA	DIM.: NA	SERIAL No.:NA
MFR.: DRITÈ	SUR.:NA	Shielding Angle:NA

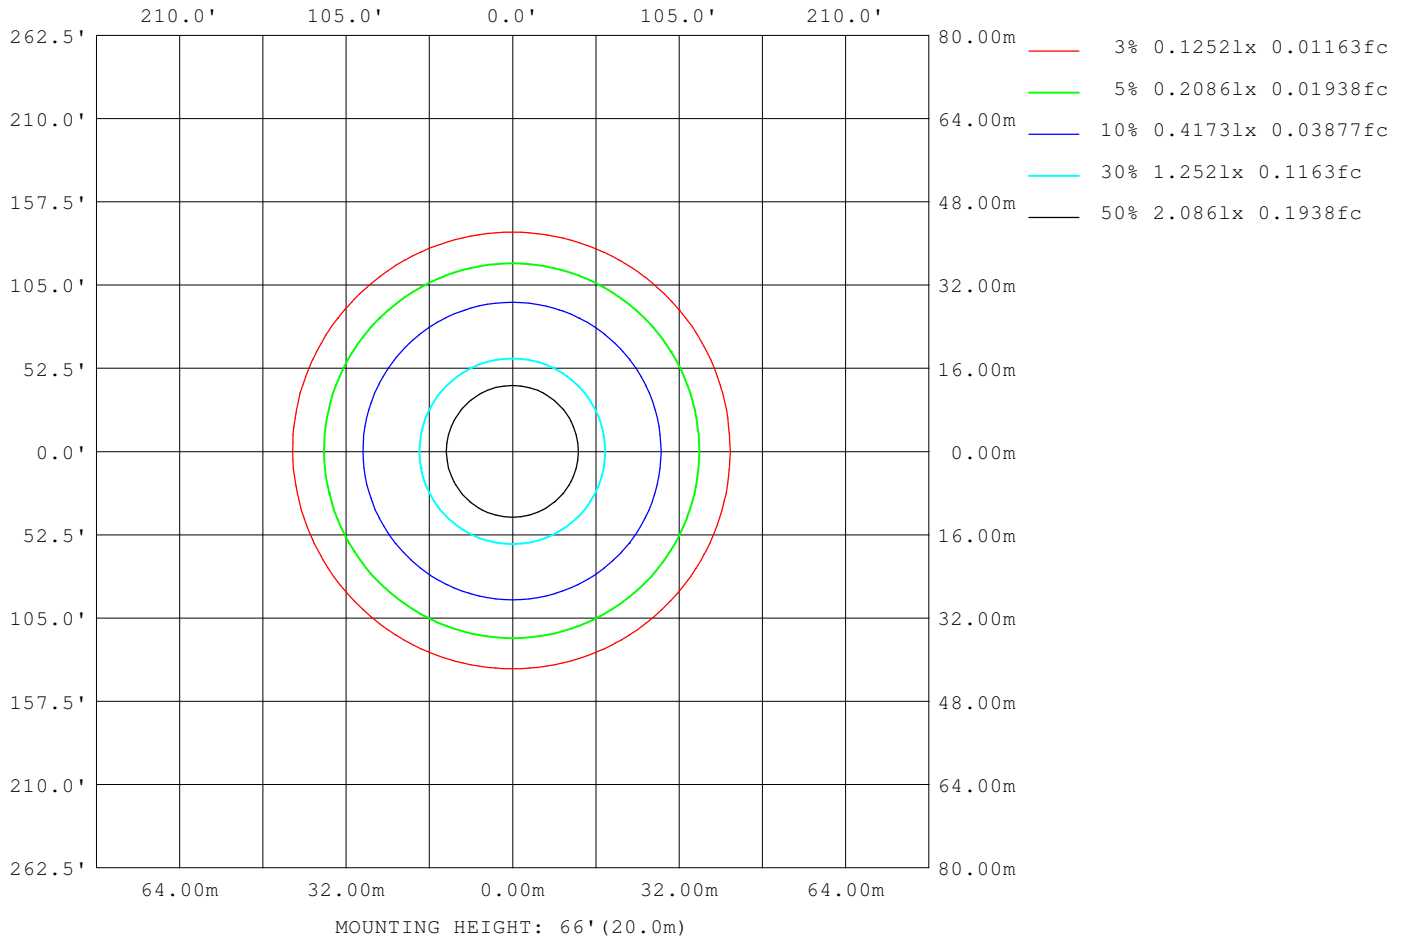

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.9DEG
Operators:CB
Test Date:2023-06-30

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
Humidity:51.3%
Test Distance:13.200m [K=1.0000]
Remarks: LAMPARA LED TIPO PANEL 40 W
QTEST 27752-02

LED Avg.L Report

Test:U:120.30V I:0.3402A P:40.738W PF:0.9954 Freq:60.00Hz Lamp Flux:4872.52x1 lm		
NAME: LAMPARA LED TIPO PANEL 40 W	TYPE:INTERIOR	WEIGHT:NA
SPEC.:NA	DIM.: NA	SERIAL No.:NA
MFR.: DRITÈ	SUR.:NA	Shielding Angle:NA


AvgL	cd/m2
L_0~180 (65) av	14648
L_0~180 (75) av	13154
L_0~180 (85) av	10417
L_90~270 (65) av	14515
L_90~270 (75) av	13115
L_90~270 (85) av	11934
L_45 (65) av	14537
L_45 (75) av	13051
L_45 (85) av	11139

Standard: GB/T 29293-2012

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.9DEG
Operators:CB
Test Date:2023-06-30

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
Humidity:51.3%
Test Distance:13.200m [K=1.0000]
Remarks: LAMPARA LED TIPO PANEL 40 W
QTEST 27752-02

Planar Illuminance Curve

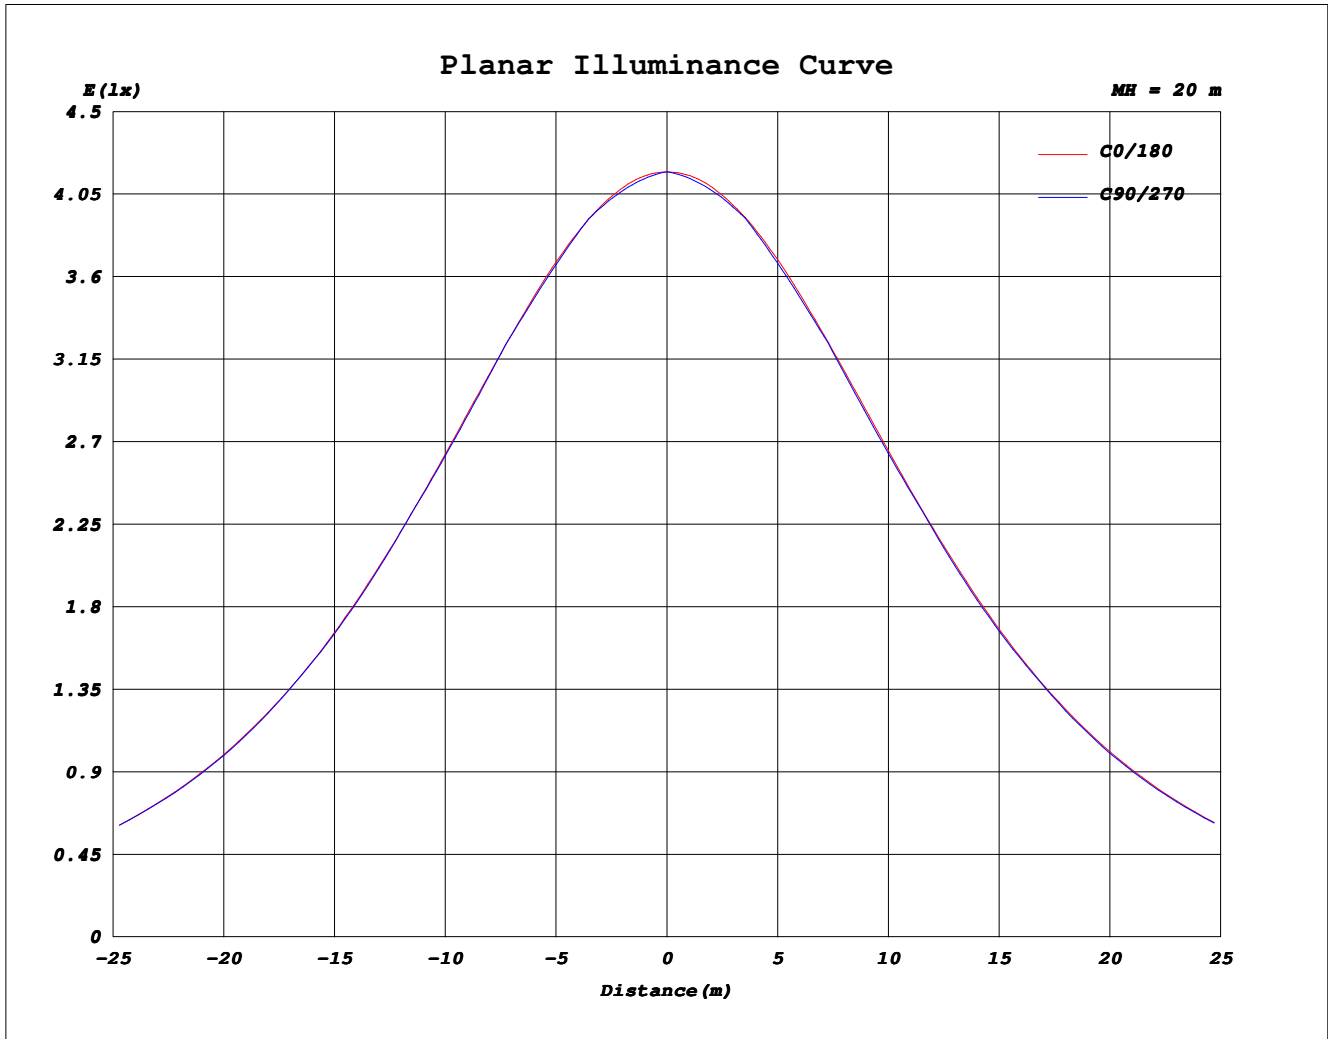

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.9DEG
Operators:CB
Test Date:2023-06-30

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
Humidity:51.3%
Test Distance:13.200m [K=1.0000]
Remarks: LAMPARA LED TIPO PANEL 40 W
QTEST 27752-02

Marca: DRITE, Item No PNL606, Máx.40W, CCT: 3500K-4000K-5000K, COLOR BLANCO
85-265V, 50-60Hz, 130Lm/W, IRC(Ra)>80, PF>0.9, 96LED, 50000Hrs, IP20, -20°C~40°C
SMD 2835, PRODUCTO DIMERIZABLE C.F: 101122XS

Test Distance: 13.200 metres
Test Temperature: 24.9 degrees Celsius

Significance: PHOTOMETRIC TEST
D-LUX
Carrera 46 # 14-213, Medellín - Antioquia
SAMPLES RECEIVED IN 2023-06-16

Special Notes: TEST EQUIPMENT

GONIOPHOTOMETER SYSTEM: 109A
POWER SUPPLY: 107A
POWER ANALIZER: 110A
THERMOHYGROMETER 354M

Environmental Conditions: 25 ± 1 °C temperature and 50 ± 15% RH
The results reported here relate only to the elements tested.
This test report should not be partially reproduced,
Without the approval of the QTEST Laboratory.

Checked / Approved: CLAUDIA BETANCUR

Testing Procedure: IESNA LM 79 de 2019

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.9DEG
Operators:CB
Test Date:2023-06-30

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
Humidity:51.3%
Test Distance:13.200m [K=1.0000]
Remarks: LAMPARA LED TIPO PANEL 40 W
QTEST 27752-02

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.30V I:0.3402A P:40.738W PF:0.9954 Freq:60.00Hz Lamp Flux:4872.52x1 lm		
NAME: LAMPARA LED TIPO PANEL 40 W	TYPE:INTERIOR	WEIGHT:NA
SPEC.:NA	DIM.: NA	SERIAL No.:NA
MFR.: DRITÈ	SUR.:NA	Shielding Angle:NA

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669
5	1661	1660	1659	1659	1658	1658	1657	1657	1657	1656	1656	1656	1655	1655	1655	1655	1655	1654	1654
10	1639	1638	1637	1637	1636	1636	1637	1636	1635	1636	1636	1636	1637	1638	1638	1639	1639	1640	1640
15	1604	1603	1603	1603	1604	1602	1602	1602	1603	1602	1602	1601	1601	1600	1600	1600	1599	1599	1598
20	1555	1555	1557	1558	1555	1554	1554	1554	1554	1555	1554	1553	1553	1553	1554	1555	1555	1556	1557
25	1494	1496	1500	1496	1493	1493	1494	1497	1494	1493	1493	1493	1492	1491	1491	1490	1489	1489	1488
30	1420	1423	1426	1420	1419	1423	1423	1419	1419	1419	1420	1420	1418	1417	1417	1417	1418	1419	1420
35	1333	1340	1338	1331	1338	1338	1333	1334	1337	1334	1332	1331	1331	1331	1330	1330	1329	1328	1328
40	1235	1246	1237	1238	1243	1235	1238	1241	1235	1233	1235	1237	1235	1233	1233	1233	1234	1234	1235
45	1126	1143	1125	1139	1128	1131	1132	1124	1128	1132	1127	1125	1125	1124	1124	1123	1123	1122	1121
50	1007	1022	1011	1016	1013	1015	1007	1016	1011	1006	1008	1010	1008	1006	1005	1005	1005	1006	1006
55	880	891	894	881	893	881	892	881	884	887	881	878	878	878	878	878	877	876	875
60	747	750	759	762	746	757	748	757	748	745	748	750	747	745	744	743	743	743	744
65	607	608	609	610	620	613	615	608	614	612	608	606	607	607	607	606	605	604	603
70	467	482	486	485	477	469	476	472	467	470	472	470	467	466	464	463	463	463	463
75	329	338	340	343	334	337	334	339	334	330	329	330	331	332	331	331	330	330	329
80	199	214	214	211	207	207	202	205	207	206	204	202	201	200	198	197	197	196	196
85	80.1	76.3	74.2	79.3	89.3	87.1	84.3	88.8	91.2	93.1	94.7	95.9	96.9	97.7	98.2	98.6	98.8	98.7	98.5
90	0.00	2.74	2.90	2.83	2.67	2.45	2.27	2.05	1.83	1.69	1.59	1.52	1.50	1.51	1.53	1.53	1.53	1.51	1.49

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.9DEG
Operators:CB
Test Date:2023-06-30

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
Humidity:51.3%
Test Distance:13.200m [K=1.0000]
Remarks: LAMPARA LED TIPO PANEL 40 W
QTEST 27752-02

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.30V I:0.3402A P:40.738W PF:0.9954 Freq:60.00Hz Lamp Flux:4872.52x1 lm		
NAME: LAMPARA LED TIPO PANEL 40 W	TYPE:INTERIOR	WEIGHT:NA
SPEC.:NA	DIM.: NA	SERIAL No.:NA
MFR.: DRITÈ	SUR.:NA	Shielding Angle:NA

Table--2

UNIT: cd

C (DEG) \ γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669	1669
5	1654	1654	1654	1654	1654	1654	1654	1655	1655	1655	1656	1657	1657	1658	1659	1661	1662	1664	1662
10	1640	1640	1639	1639	1639	1638	1637	1635	1634	1633	1632	1631	1632	1633	1635	1637	1640	1644	1641
15	1598	1597	1597	1598	1598	1599	1600	1602	1605	1607	1604	1601	1598	1596	1597	1600	1605	1611	1605
20	1557	1556	1556	1554	1553	1551	1549	1547	1547	1550	1554	1560	1557	1551	1547	1549	1556	1564	1556
25	1487	1487	1487	1487	1488	1491	1494	1497	1492	1487	1483	1489	1496	1498	1489	1485	1493	1504	1494
30	1420	1419	1419	1417	1415	1412	1410	1411	1416	1424	1418	1411	1412	1423	1423	1411	1417	1431	1418
35	1326	1326	1326	1326	1329	1332	1337	1330	1325	1323	1332	1338	1326	1327	1344	1330	1329	1347	1330
40	1235	1235	1233	1231	1229	1226	1225	1230	1238	1234	1225	1231	1243	1227	1236	1240	1228	1251	1230
45	1119	1119	1119	1120	1122	1126	1127	1121	1114	1122	1134	1120	1123	1132	1117	1142	1116	1144	1118
50	1006	1006	1005	1003	1001	998	997	1003	1012	1003	997	1014	1003	1009	1006	1016	1003	1028	1005
55	874	873	873	874	875	879	881	875	869	876	884	870	887	873	894	876	883	902	886
60	744	743	742	741	740	738	736	740	747	744	735	751	739	757	740	745	759	769	763
65	602	601	601	601	602	603	606	604	600	599	610	603	608	602	618	623	627	631	631
70	462	463	463	463	462	461	460	459	463	468	463	461	473	465	459	461	469	491	473
75	328	328	327	327	327	327	327	328	328	326	323	330	328	333	325	332	337	352	343
80	195	196	196	196	197	197	198	198	197	197	199	202	199	199	192	188	197	221	206
85	98.1	97.6	96.9	96.0	95.1	94.0	92.7	91.3	89.7	87.9	85.8	83.3	83.0	79.9	78.5	67.2	56.5	101	86.0
90	1.45	1.41	1.37	1.34	1.32	1.31	1.32	1.34	1.41	1.52	1.64	1.77	1.92	2.07	2.21	2.27	2.18	3.11	0.98

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:24.9DEG
 Operators:CB
 Test Date:2023-06-30

V(B) Range:-90 - 90DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.417
 Humidity:51.3%
 Test Distance:13.200m [K=1.0000]
 Remarks: LAMPARA LED TIPO PANEL 40 W
 QTEST 27752-02

