
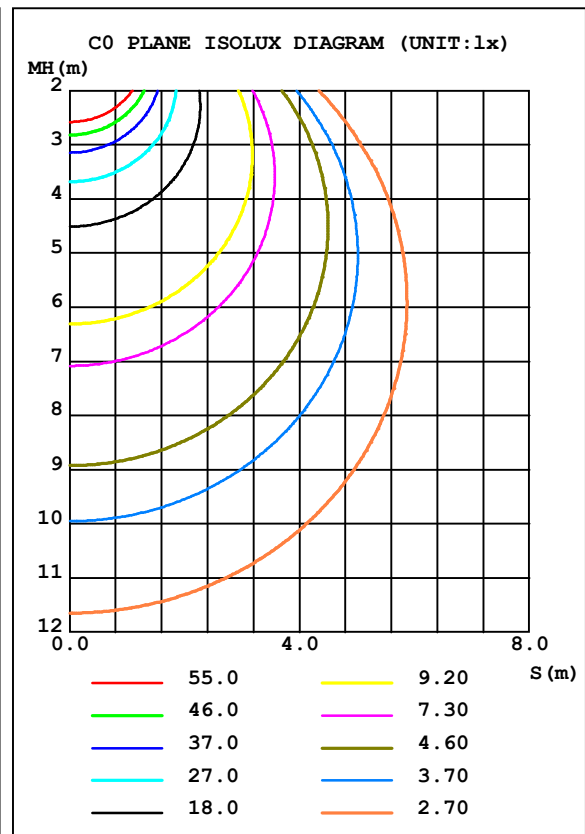


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.002V I:0.4311A P:10.347W PF:1.0000 Freq:0Hz Lamp Flux:1136.04x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 109.79 lm/W			
MODEL	CIL2835	I _{max} (cd)	366.5	S/MH (C0/180)	1.29
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	1.30
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	1136.0	η UP, DN (C0-180)	0.8, 49.5
NOMINAL FLUX (lm)	1136.04	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 48.9
LAMPS INSIDE	1	η up (%)	1.6	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	24	η down (%)	98.4	CIBSE SHR MAX	1.50

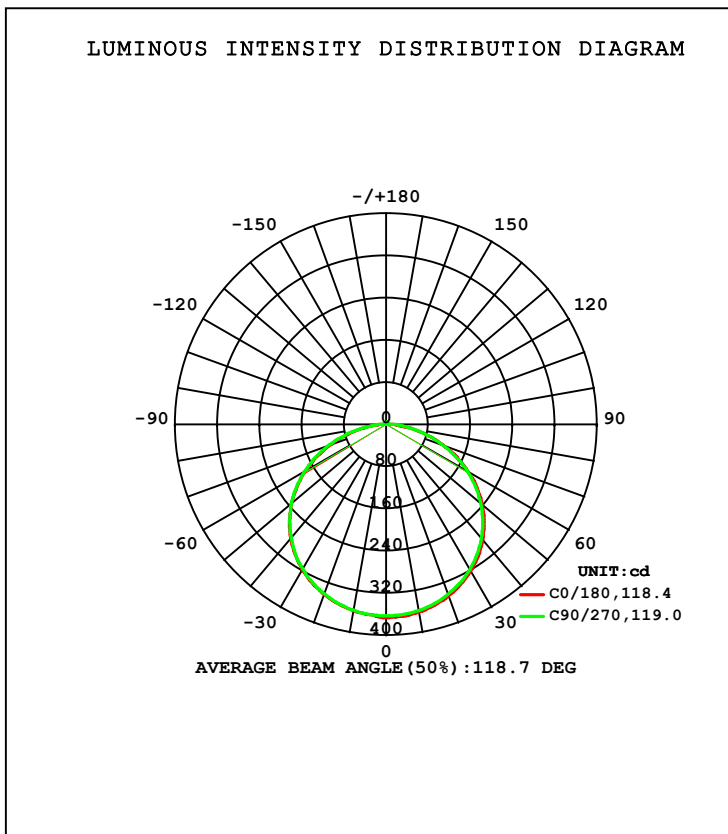

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: CHM
 Test Date: 2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity: 65.0%
 Test Distance: 9.727m [K=1.0000]
 Remarks: 5000K

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	361.6	358.4	358.8	358.0					0- 10	34.53	34.53	3.04,3.04
20	346.7	343.3	343.6	342.7					10- 20	99.69	134.2	11.8,11.8
30	321.5	317.8	317.9	316.9					20- 30	153.4	287.6	25.3,25.3
40	285.5	281.6	281.5	280.8					30- 40	188.8	476.4	41.9,41.9
50	238.7	235.0	234.3	234.6					40- 50	200.7	677.1	59.6,59.6
60	180.3	178.4	176.7	178.7					50- 60	186.1	863.2	76,76
70	115.1	113.9	110.6	114.9					60- 70	145.1	1008	88.8,88.8
80	48.18	50.61	43.49	47.01					70- 80	84.32	1093	96.2,96.2
90	2.467	11.47	2.613	9.421					80- 90	25.58	1118	98.4,98.4
100	1.166	4.665	1.695	1.303					90-100	3.600	1122	98.7,98.7
110	1.681	3.502	1.969	1.633					100-110	2.290	1124	98.9,98.9
120	2.180	2.752	2.644	2.131					110-120	2.274	1126	99.1,99.1
130	2.673	2.613	2.995	2.631					120-130	2.307	1129	99.3,99.3
140	3.092	3.044	3.142	3.056					130-140	2.241	1131	99.5,99.5
150	3.444	3.421	3.445	3.432					140-150	2.045	1133	99.7,99.7
160	3.730	3.725	3.737	3.724					150-160	1.656	1135	99.9,99.9
170	3.955	3.955	3.961	3.949					160-170	1.088	1136	100,100
180	4.077	4.071	4.065	4.083					170-180	0.3824	1136	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 5000K

LUMINANCE LIMITATION CURVES

Test:U:24.002V I:0.4311A P:10.347W PF:1.0000 Freq:0Hz Lamp Flux:1136.04x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

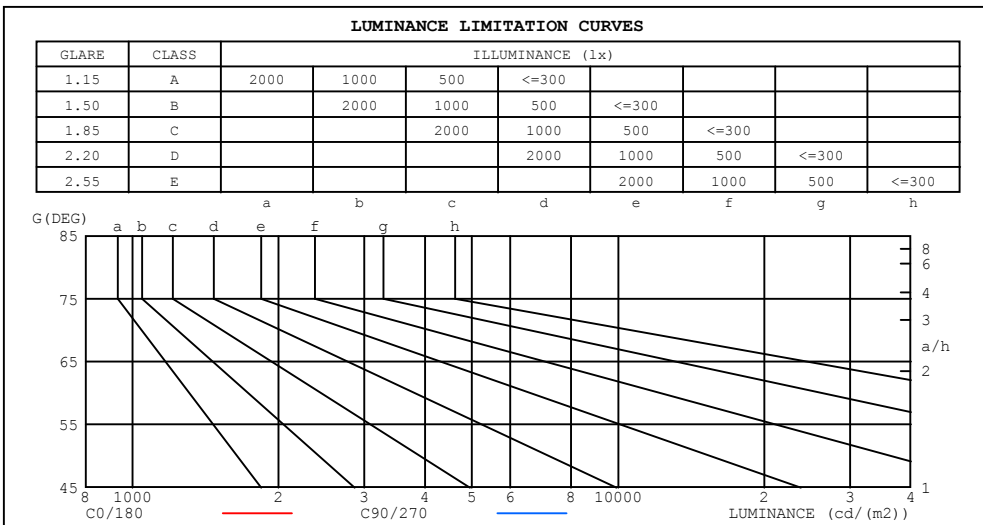

LUMINANCE cd/ (m2)		
G (DEG)	C0/180	C90/270
85	55104	72648
80	66055	69390
75	74546	74470
70	80145	79290
65	83705	82684
60	85861	84950
55	87690	86289
50	88410	87052
45	88657	87430


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 5000K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.002V I:0.4311A P:10.347W PF:1.0000 Freq:0Hz Lamp Flux:1136.04x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.89	.82	.76	.87	.81	.75	.84	.78	.73	.80	.75	.71	.77	.73	.70	.67
3.0	.78	.70	.63	.76	.69	.62	.73	.67	.61	.70	.65	.60	.67	.63	.59	.56
4.0	.69	.60	.53	.68	.59	.53	.65	.58	.52	.62	.56	.51	.60	.55	.50	.48
5.0	.62	.52	.46	.60	.52	.45	.58	.50	.45	.56	.49	.44	.54	.48	.43	.41
6.0	.55	.46	.40	.54	.46	.39	.52	.45	.39	.50	.44	.38	.49	.43	.38	.36
7.0	.50	.41	.35	.49	.41	.35	.47	.40	.34	.46	.39	.34	.44	.38	.34	.31
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.31	.42	.35	.30	.41	.35	.30	.28
9.0	.42	.33	.28	.41	.33	.28	.40	.33	.27	.39	.32	.27	.37	.31	.27	.25
10.0	.38	.30	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.35	.29	.24	.23

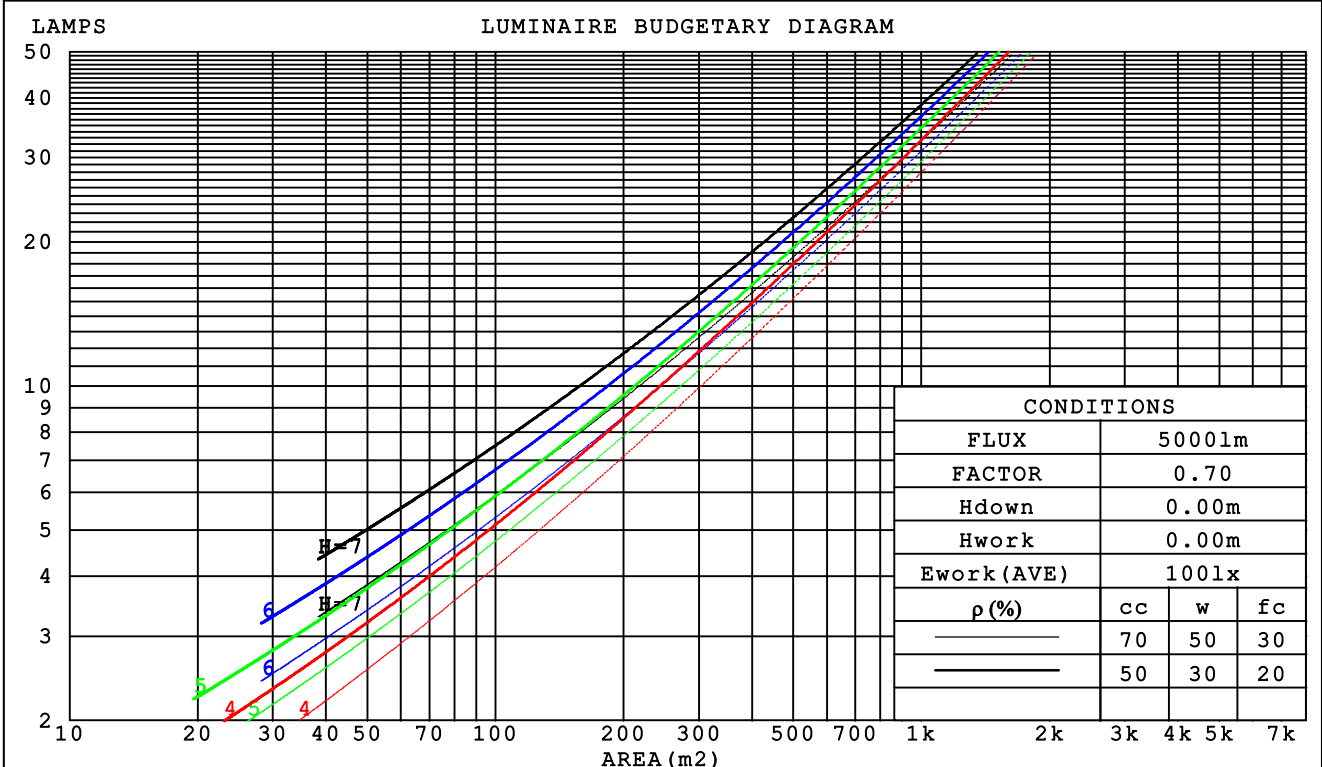

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 5000K

WEC AND CCEC

Test:U:24.002V I:0.4311A P:10.347W PF:1.0000 Freq:0Hz Lamp Flux:1136.04x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.319	.181	.057	.311	.177	.056	.297	.170	.054	.284	.164	.053	.272	.158	.051	
2.0	.298	.163	.050	.291	.161	.049	.279	.155	.048	.267	.150	.047	.257	.145	.046	
3.0	.275	.146	.044	.269	.144	.043	.258	.140	.042	.248	.136	.042	.238	.132	.041	
4.0	.253	.132	.039	.248	.130	.038	.238	.126	.038	.229	.123	.037	.220	.120	.036	
5.0	.234	.119	.034	.229	.118	.034	.220	.115	.034	.212	.112	.033	.204	.109	.033	
6.0	.216	.108	.031	.212	.107	.031	.204	.105	.030	.197	.102	.030	.190	.100	.030	
7.0	.201	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.177	.092	.027	
8.0	.188	.092	.026	.184	.091	.026	.178	.089	.025	.172	.087	.025	.166	.085	.025	
9.0	.176	.085	.024	.173	.084	.024	.167	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.147	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.193	.168	.146	.165	.144	.125	.113	.099	.087	.065	.057	.050	.021	.018	.016	
2.0	.185	.144	.109	.159	.124	.095	.109	.086	.066	.063	.050	.039	.020	.016	.013	
3.0	.178	.127	.086	.152	.109	.074	.105	.076	.052	.060	.044	.031	.019	.014	.010	
4.0	.170	.113	.070	.146	.098	.061	.100	.068	.043	.058	.040	.025	.019	.013	.008	
5.0	.163	.103	.059	.140	.089	.051	.096	.062	.036	.056	.037	.022	.018	.012	.007	
6.0	.156	.095	.051	.134	.082	.045	.092	.057	.032	.054	.034	.019	.017	.011	.006	
7.0	.149	.088	.045	.128	.076	.039	.088	.053	.028	.051	.031	.017	.017	.010	.006	
8.0	.142	.082	.041	.122	.071	.036	.085	.050	.025	.049	.030	.015	.016	.010	.005	
9.0	.136	.077	.037	.117	.067	.033	.081	.047	.023	.047	.028	.014	.015	.009	.005	
10.0	.130	.073	.035	.112	.063	.030	.078	.045	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 5000K

UGR(Unified Glare Rating) Table

Test:U:24.002V I:0.4311A P:10.347W PF:1.0000 Freq:0Hz Lamp Flux:1136.04x1 lm										
NAME: CIL2835-240-CTA-2700+5000K					TYPE:Flexible LED Strip			WEIGHT:		
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80					DIM.: (L)1000*(W)8MM			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	28.0	29.5	28.3	29.7	30.0	27.9	29.5	28.2	29.7	29.9
3H	29.6	31.0	29.9	31.3	31.5	29.5	30.9	29.9	31.2	31.5
4H	30.2	31.6	30.6	31.8	32.1	30.2	31.5	30.5	31.8	32.1
6H	30.7	31.9	31.0	32.2	32.6	30.7	31.9	31.0	32.2	32.5
8H	30.8	32.0	31.2	32.3	32.7	30.8	32.0	31.2	32.4	32.7
12H	30.9	32.1	31.3	32.4	32.7	31.0	32.1	31.3	32.5	32.8
4H 2H	28.6	30.0	29.0	30.2	30.5	28.6	29.9	28.9	30.2	30.5
3H	30.4	31.6	30.8	31.9	32.2	30.4	31.5	30.7	31.9	32.2
4H	31.2	32.2	31.6	32.6	33.0	31.1	32.2	31.5	32.5	32.9
6H	31.7	32.7	32.2	33.1	33.5	31.7	32.7	32.2	33.1	33.5
8H	31.9	32.8	32.4	33.2	33.6	32.0	32.8	32.4	33.2	33.7
12H	32.0	32.9	32.5	33.3	33.7	32.1	33.0	32.6	33.4	33.8
8H 4H	31.4	32.3	31.9	32.7	33.1	31.4	32.3	31.8	32.7	33.1
6H	32.2	32.9	32.6	33.3	33.8	32.2	32.9	32.6	33.3	33.8
8H	32.4	33.1	32.9	33.5	34.0	32.5	33.1	33.0	33.6	34.1
12H	32.6	33.2	33.1	33.7	34.2	32.8	33.3	33.3	33.8	34.3
12H 4H	31.4	32.3	31.9	32.7	33.1	31.4	32.2	31.9	32.6	33.1
6H	32.2	32.9	32.7	33.3	33.8	32.2	32.9	32.7	33.3	33.8
8H	32.5	33.1	33.0	33.6	34.1	32.6	33.2	33.1	33.6	34.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 1136 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.4)

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 5000K

UTILIZATION FACTORS TABLE

Test:U:24.002V I:0.4311A P:10.347W PF:1.0000 Freq:0Hz Lamp Flux:1136.04x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	56	44	37	55	44	37	54	43	37	30
0.80	66	54	47	65	54	46	63	53	46	39
1.00	74	63	55	73	62	55	71	64	55	47
1.25	82	71	63	80	70	63	77	68	62	54
1.50	87	76	69	85	75	69	82	74	67	60
2.00	94	85	78	92	84	77	88	81	76	67
2.50	98	90	83	96	88	82	91	85	80	72
3.00	101	94	88	99	92	87	95	89	85	76
4.00	105	99	95	103	97	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 5000K

ISOCANDELA DIAGRAM

Test:U:24.002V I:0.4311A P:10.347W PF:1.0000 Freq:0Hz Lamp Flux:1136.04x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

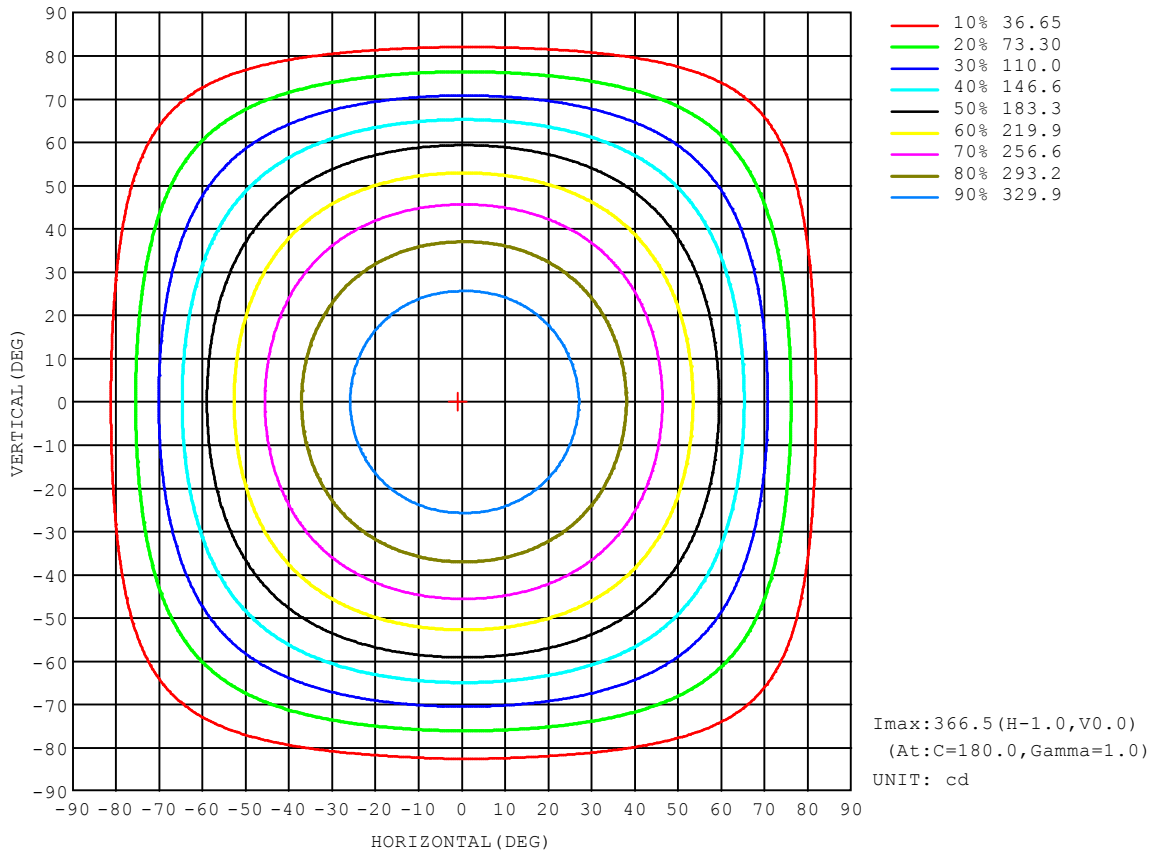


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 5000K

AAI Figure

Test:U:24.002V I:0.4311A P:10.347W PF:1.0000 Freq:0Hz Lamp Flux:1136.04x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

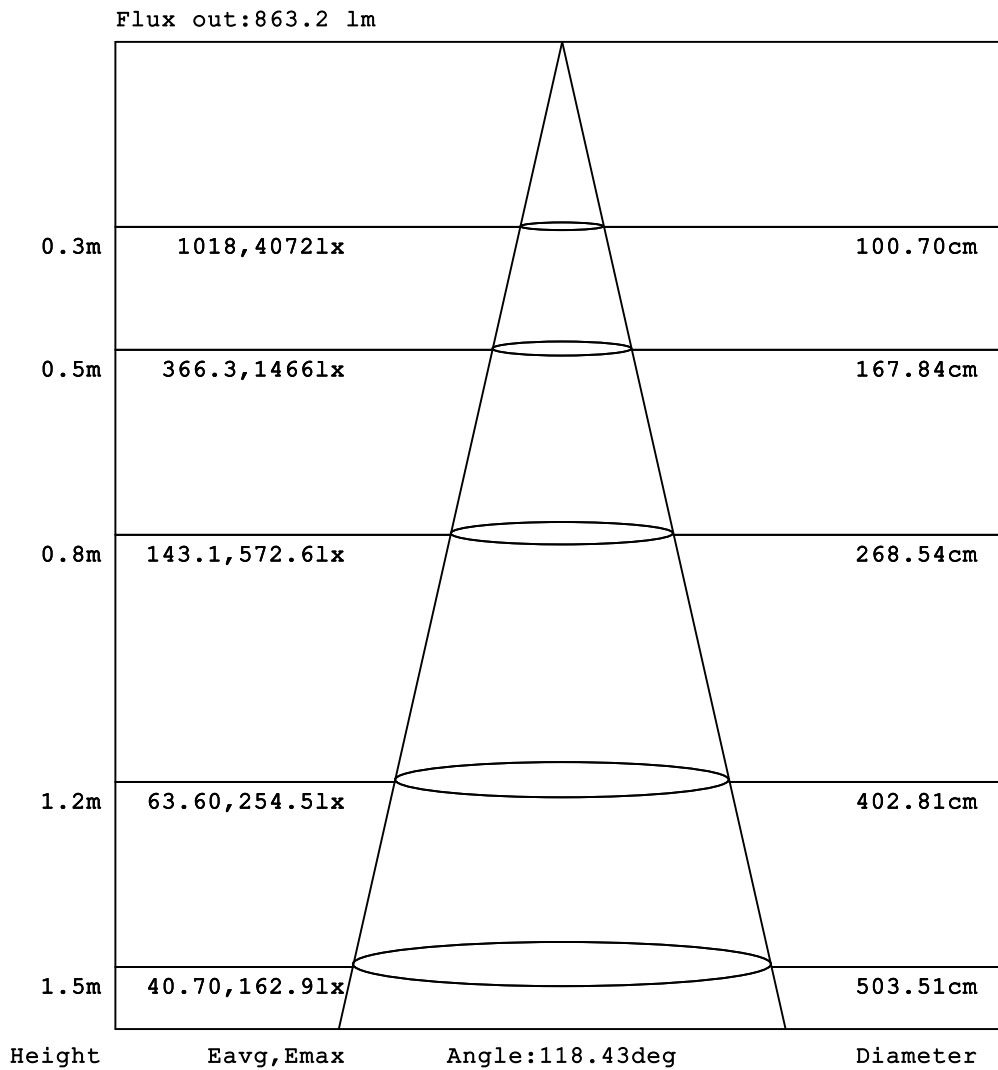


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 5000K

ISOLUX DIAGRAM

Test:U:24.002V I:0.4311A P:10.347W PF:1.0000 Freq:0Hz Lamp Flux:1136.04x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

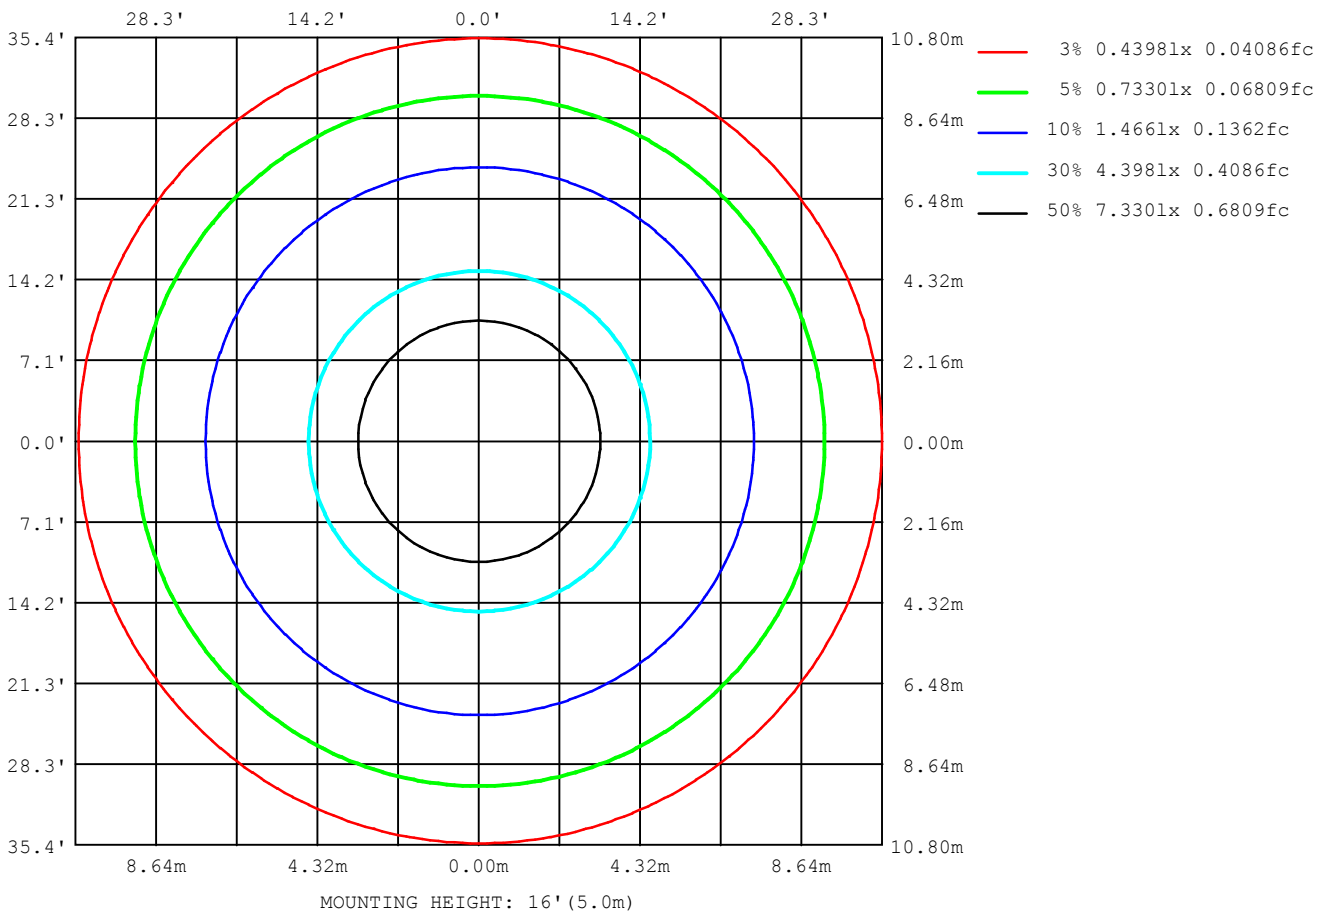

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 5000K

LED Avg.L Report

Test:U:24.002V I:0.4311A P:10.347W PF:1.0000 Freq:0Hz Lamp Flux:1136.04x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	82555
L_0~180 (75) av	72331
L_0~180 (85) av	50551
L_90~270 (65) av	82916
L_90~270 (75) av	74751
L_90~270 (85) av	68010
L_45 (65) av	82708
L_45 (75) av	73705
L_45 (85) av	61178

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 5000K

Planar Illuminance Curve

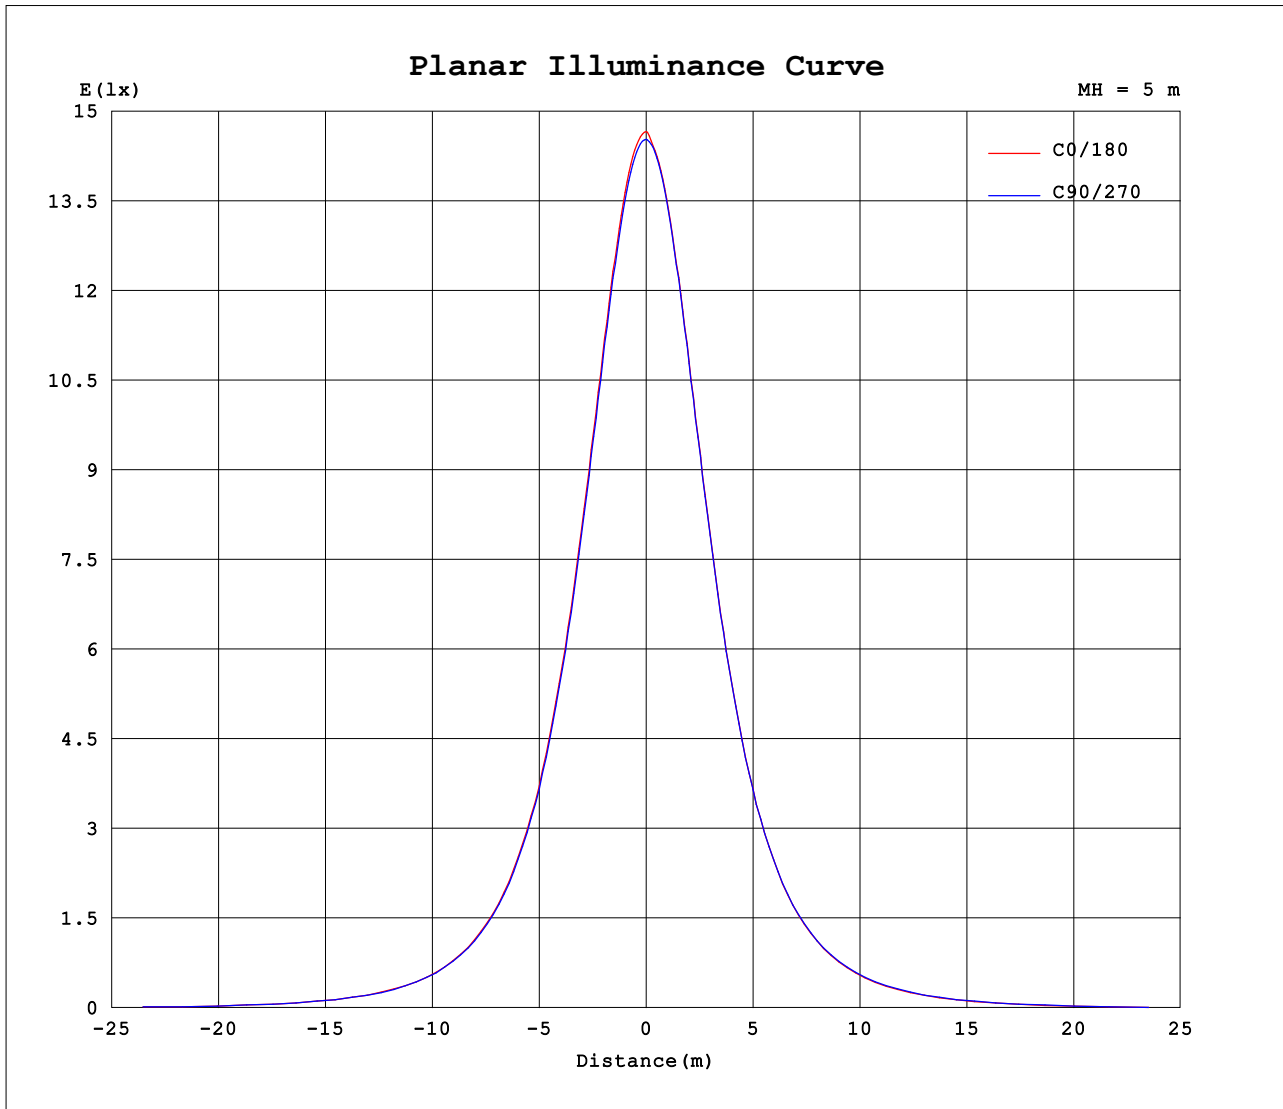

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: CHM
 Test Date: 2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity: 65.0%
 Test Distance: 9.727m [K=1.0000]
 Remarks: 5000K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.002V I:0.4311A P:10.347W PF:1.0000 Freq:0Hz Lamp Flux:1136.04x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	366	363	366	363															
5	365	362	363	362															
10	362	358	359	358															
15	355	352	353	352															
20	347	343	344	343															
25	335	332	332	331															
30	322	318	318	317															
35	305	301	301	300															
40	285	282	281	281															
45	263	260	259	259															
50	239	235	234	235															
55	211	208	207	208															
60	180	178	177	179															
65	149	147	144	148															
70	115	114	111	115															
75	81.0	81.0	76.2	81.6															
80	48.2	50.6	43.5	47.0															
85	20.2	26.6	16.8	23.2															
90	2.47	11.5	2.61	9.42															
95	0.93	5.68	1.80	3.06															
100	1.17	4.66	1.70	1.30															
105	1.42	4.04	1.76	1.39															
110	1.68	3.50	1.97	1.63															
115	1.94	3.01	2.30	1.89															
120	2.18	2.75	2.64	2.13															
125	2.43	2.49	2.96	2.39															
130	2.67	2.61	3.00	2.63															
135	2.89	2.84	3.01	2.84															
140	3.09	3.04	3.14	3.06															
145	3.28	3.23	3.31	3.26															
150	3.44	3.42	3.44	3.43															
155	3.59	3.58	3.60	3.59															
160	3.73	3.72	3.74	3.72															
165	3.85	3.85	3.86	3.85															
170	3.96	3.96	3.96	3.95															
175	4.03	4.03	4.02	4.04															
180	4.08	4.07	4.06	4.08															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 5000K