
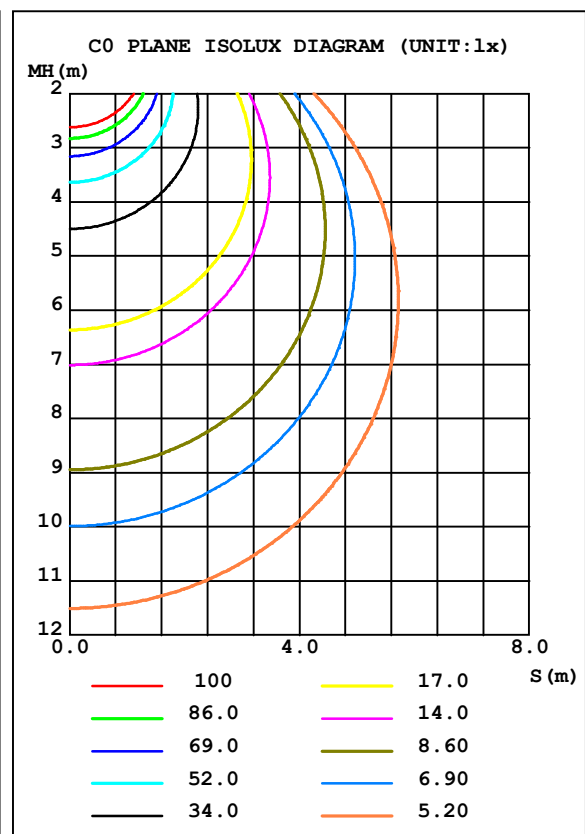


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.000V I:0.8297A P:19.913W PF:1.0000 Freq:0Hz Lamp Flux:2096.94x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 105.31 lm/W			
MODEL	CIL2835	I _{max} (cd)	688.6	S/MH (C0/180)	1.29
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	1.30
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	2096.9	η UP, DN (C0-180)	0.7, 48.7
NOMINAL FLUX (lm)	2096.94	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 50.0
LAMPS INSIDE	1	η up (%)	1.3	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	η down (%)	98.7	CIBSE SHR MAX	1.35

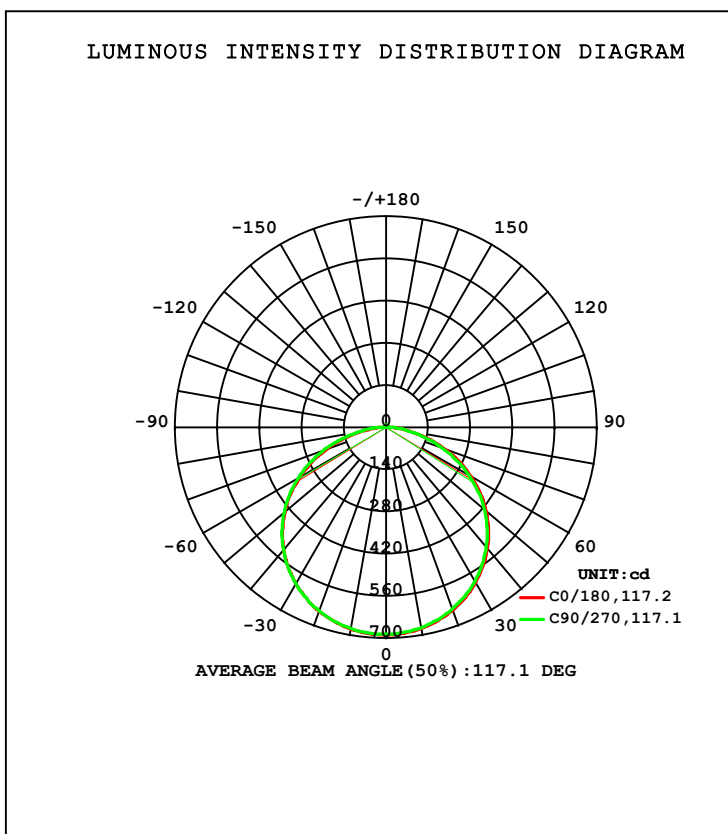

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: CHM
 Test Date: 2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity: 65.0%
 Test Distance: 9.727m [K=1.0000]
 Remarks: 2700+5000K

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	677.8	674.9	679.4	678.1					0- 10	65.16	65.16	3.11,3.11
20	646.4	642.6	649.6	649.1					10- 20	187.7	252.9	12.1,12.1
30	594.9	589.9	599.2	599.7					20- 30	287.7	540.5	25.8,25.8
40	524.1	517.7	529.0	530.8					30- 40	352.3	892.8	42.6,42.6
50	434.3	427.0	439.6	443.0					40- 50	372.4	1265	60.3,60.3
60	327.0	316.6	329.6	337.3					50- 60	342.9	1608	76.7,76.7
70	205.3	196.1	207.7	217.0					60- 70	265.2	1873	89.3,89.3
80	81.46	79.34	83.25	94.14					70- 80	152.0	2025	96.6,96.6
90	2.738	10.28	4.031	17.05					80- 90	43.56	2069	98.7,98.7
100	2.187	2.220	2.268	2.267					90-100	3.903	2073	98.8,98.8
110	3.163	3.111	3.162	2.946					100-110	2.788	2076	99,99
120	4.118	4.042	4.090	3.904					110-120	3.539	2079	99.1,99.1
130	5.035	4.953	5.007	4.847					120-130	4.030	2083	99.3,99.3
140	5.820	5.754	5.772	5.674					130-140	4.148	2087	99.5,99.5
150	6.463	6.447	6.435	6.391					140-150	3.828	2091	99.7,99.7
160	7.029	7.012	6.987	6.974					150-160	3.106	2094	99.9,99.9
170	7.436	7.437	7.425	7.424					160-170	2.043	2096	100,100
180	7.649	7.667	7.649	7.679					170-180	0.7187	2097	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700+5000K

LUMINANCE LIMITATION CURVES

Test:U:24.000V I:0.8297A P:19.913W PF:1.0000 Freq:0Hz Lamp Flux:2096.94x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

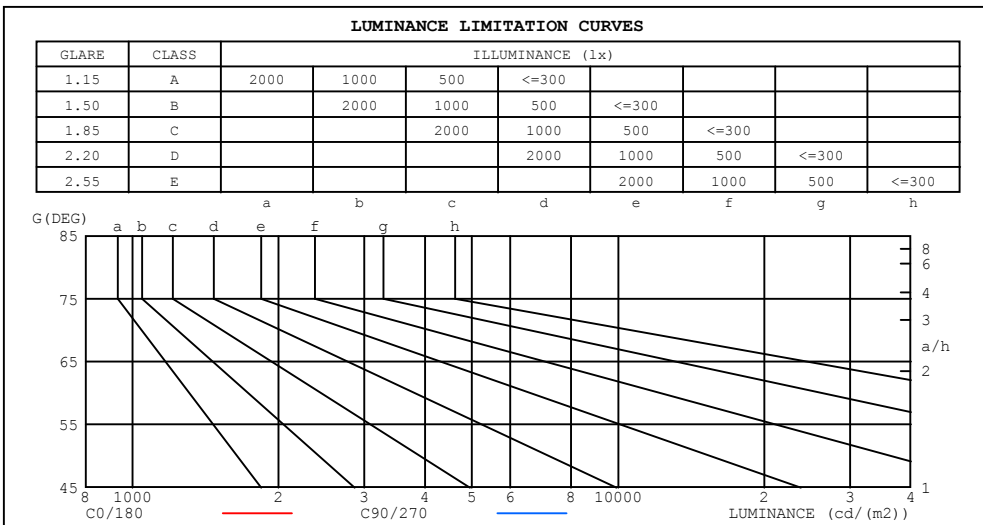

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	87145	98593
80	111690	108791
75	129881	124309
70	142907	136499
65	150675	145001
60	155701	150746
55	158893	155278
50	160874	158147
45	162129	159801


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700+5000K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.000V I:0.8297A P:19.913W PF:1.0000 Freq:0Hz Lamp Flux:2096.94x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.90	.87	.88	.86	.84	.82
2.0	.90	.83	.77	.88	.81	.76	.84	.78	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.65	.60	.68	.63	.59	.57
4.0	.69	.60	.54	.68	.60	.53	.65	.58	.52	.63	.56	.51	.60	.55	.51	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.50	.44	.54	.48	.44	.42
6.0	.56	.46	.40	.55	.46	.40	.53	.45	.39	.51	.44	.39	.49	.43	.38	.36
7.0	.50	.41	.35	.49	.41	.35	.48	.40	.35	.46	.39	.34	.45	.39	.34	.32
8.0	.46	.37	.31	.45	.37	.31	.44	.36	.31	.42	.36	.31	.41	.35	.30	.28
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.25
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

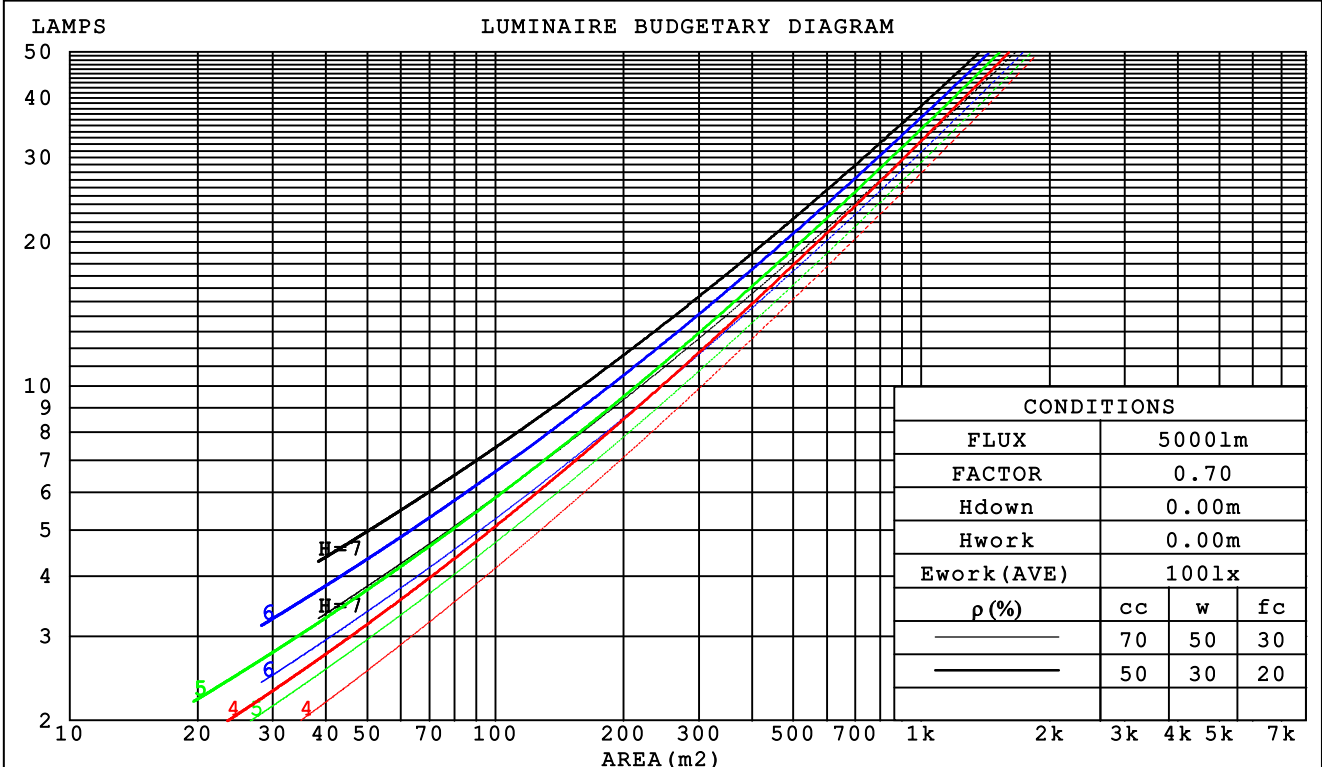

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700+5000K

WEC AND CCEC

Test:U:24.000V I:0.8297A P:19.913W PF:1.0000 Freq:0Hz Lamp Flux:2096.94x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.315	.179	.057	.308	.176	.056	.294	.169	.054	.281	.162	.052	.269	.156	.050	
2.0	.296	.162	.050	.289	.159	.049	.277	.154	.048	.265	.149	.047	.255	.144	.045	
3.0	.273	.145	.044	.267	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.252	.131	.038	.247	.129	.038	.237	.126	.038	.228	.122	.037	.219	.119	.036	
5.0	.233	.119	.034	.228	.117	.034	.219	.114	.034	.211	.111	.033	.203	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.187	.091	.026	.184	.090	.026	.177	.089	.025	.171	.087	.025	.166	.085	.025	
9.0	.175	.085	.024	.172	.084	.024	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.152	.075	.021	.147	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.201	.201	.201	.172	.172	.172	.117	.117	.117	.067	.067	.067	.022	.022	.022	
1.0	.191	.166	.144	.163	.143	.124	.112	.098	.086	.064	.057	.050	.021	.018	.016	
2.0	.183	.142	.108	.157	.122	.093	.108	.085	.065	.062	.049	.038	.020	.016	.012	
3.0	.176	.125	.084	.150	.108	.073	.103	.075	.051	.060	.044	.030	.019	.014	.010	
4.0	.168	.112	.068	.144	.096	.059	.099	.067	.042	.057	.039	.025	.018	.013	.008	
5.0	.161	.101	.057	.138	.088	.050	.095	.061	.035	.055	.036	.021	.018	.012	.007	
6.0	.153	.093	.049	.132	.080	.043	.091	.056	.030	.053	.033	.018	.017	.011	.006	
7.0	.147	.086	.044	.126	.075	.038	.087	.052	.027	.051	.031	.016	.016	.010	.005	
8.0	.140	.080	.039	.121	.070	.034	.083	.049	.024	.049	.029	.014	.016	.009	.005	
9.0	.134	.075	.036	.115	.065	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
10.0	.128	.071	.033	.111	.062	.029	.077	.043	.020	.045	.026	.012	.015	.008	.004	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700+5000K

UGR(Unified Glare Rating) Table

Test:U:24.000V I:0.8297A P:19.913W PF:1.0000 Freq:0Hz Lamp Flux:2096.94x1 lm										
NAME: CIL2835-240-CTA-2700+5000K					TYPE:Flexible LED Strip			WEIGHT:		
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80					DIM.: (L)1000*(W)8MM			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	27.9	29.4	28.2	29.6	29.8	27.8	29.3	28.0	29.5	29.7
3H	29.4	30.8	29.7	31.1	31.4	29.3	30.7	29.6	30.9	31.2
4H	30.0	31.4	30.4	31.6	31.9	29.8	31.2	30.2	31.5	31.7
6H	30.4	31.7	30.8	32.0	32.3	30.2	31.5	30.6	31.8	32.1
8H	30.5	31.7	30.9	32.0	32.4	30.4	31.6	30.7	31.9	32.2
12H	30.6	31.7	30.9	32.1	32.4	30.4	31.6	30.8	31.9	32.3
4H 2H	28.5	29.8	28.8	30.1	30.4	28.4	29.7	28.7	30.0	30.3
3H	30.2	31.4	30.6	31.7	32.0	30.1	31.2	30.4	31.6	31.9
4H	30.9	32.0	31.3	32.3	32.7	30.8	31.8	31.2	32.2	32.5
6H	31.4	32.4	31.8	32.8	33.2	31.3	32.2	31.7	32.6	33.0
8H	31.6	32.5	32.0	32.9	33.3	31.4	32.3	31.9	32.7	33.1
12H	31.7	32.5	32.1	32.9	33.3	31.6	32.4	32.0	32.8	33.2
8H 4H	31.2	32.0	31.6	32.4	32.8	31.0	31.9	31.5	32.3	32.7
6H	31.8	32.5	32.3	33.0	33.4	31.7	32.4	32.1	32.8	33.3
8H	32.0	32.7	32.5	33.1	33.6	31.9	32.6	32.4	33.0	33.5
12H	32.2	32.8	32.7	33.2	33.7	32.1	32.7	32.6	33.1	33.7
12H 4H	31.2	32.0	31.6	32.4	32.8	31.0	31.8	31.5	32.3	32.7
6H	31.9	32.5	32.3	33.0	33.4	31.7	32.4	32.2	32.8	33.3
8H	32.1	32.7	32.6	33.2	33.7	32.0	32.6	32.5	33.0	33.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 2097 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.6)

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700+5000K

UTILIZATION FACTORS TABLE

Test:U:24.000V I:0.8297A P:19.913W PF:1.0000 Freq:0Hz Lamp Flux:2096.94x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	56	45	37	56	44	37	54	44	37	31
0.80	66	55	47	65	54	47	63	53	46	39
1.00	75	63	56	74	63	56	71	64	55	48
1.25	82	71	64	80	70	63	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	88	82	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	94	89	99	93	88	95	90	85	76
4.00	106	100	95	103	98	93	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700+5000K

ISOCANDELA DIAGRAM

Test:U:24.000V I:0.8297A P:19.913W PF:1.0000 Freq:0Hz Lamp Flux:2096.94x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

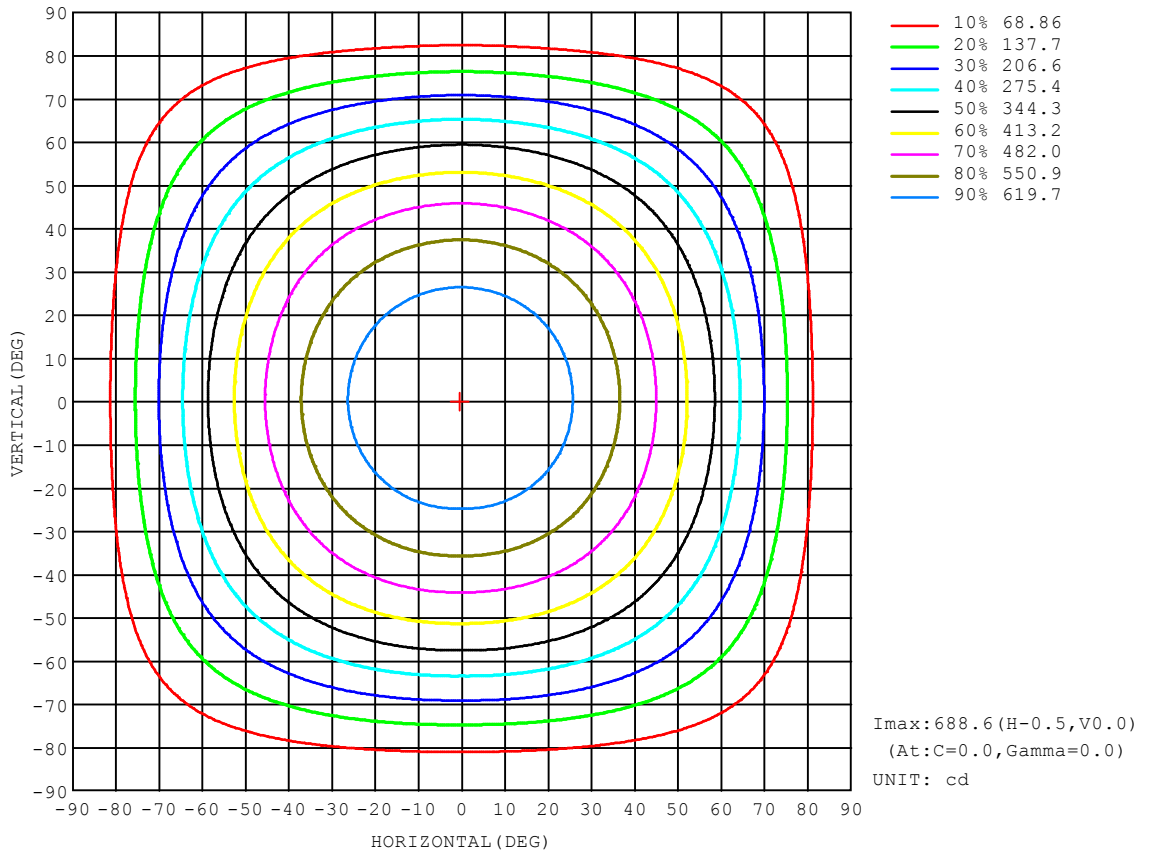


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700+5000K

AAI Figure

Test:U:24.000V I:0.8297A P:19.913W PF:1.0000 Freq:0Hz Lamp Flux:2096.94x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

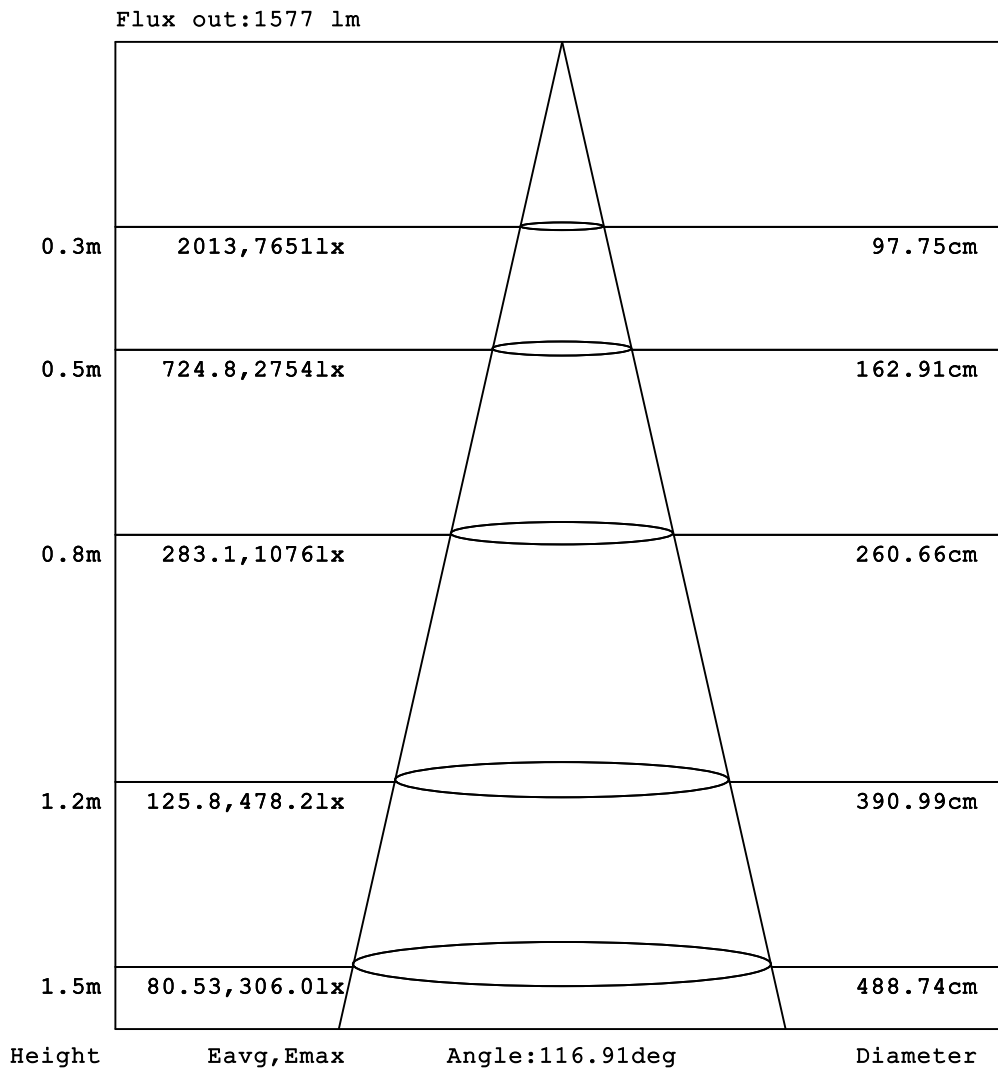


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700+5000K

ISOLUX DIAGRAM

Test:U:24.000V I:0.8297A P:19.913W PF:1.0000 Freq:0Hz Lamp Flux:2096.94x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

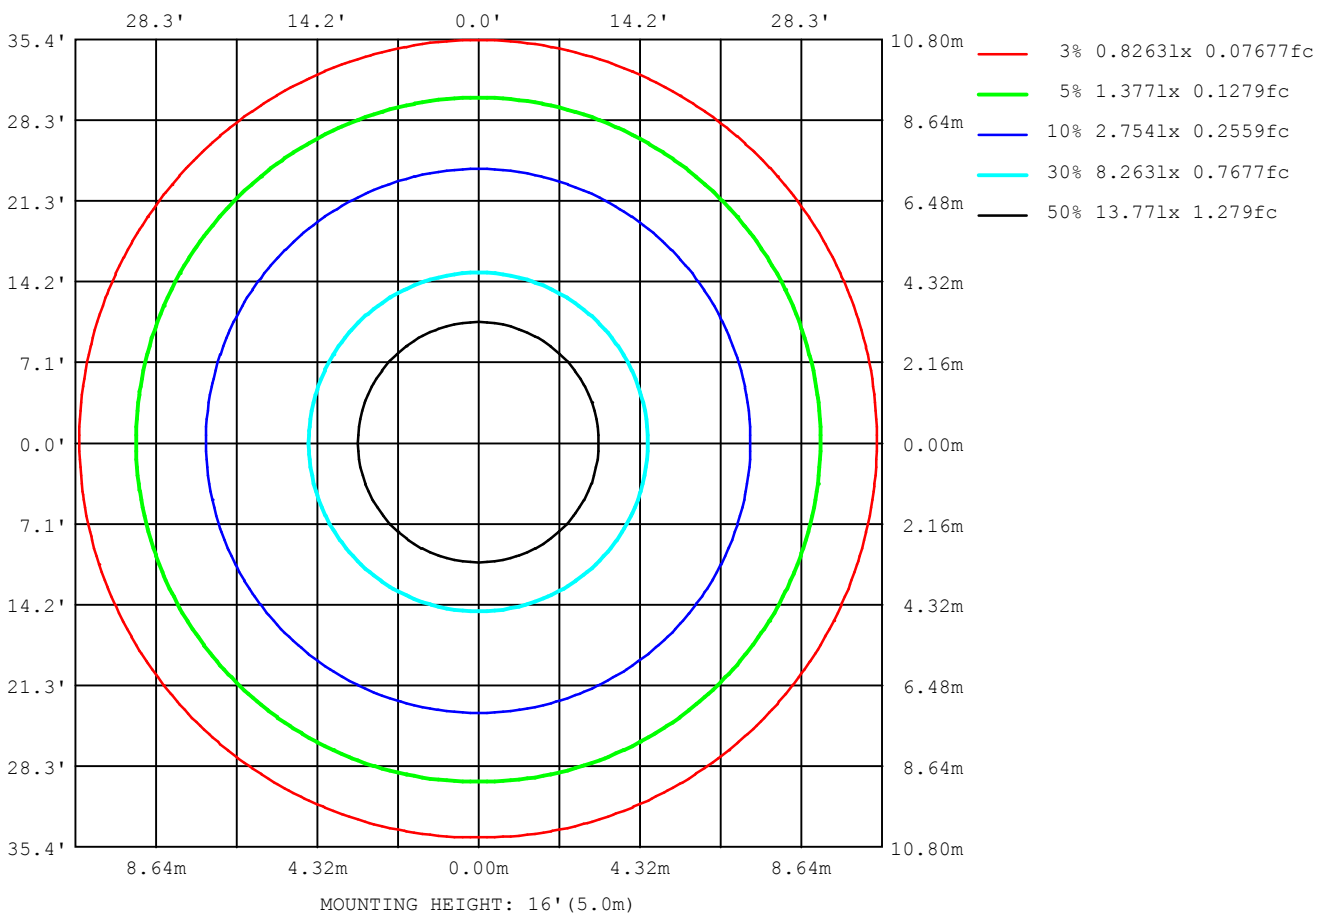

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700+5000K

LED Avg.L Report

Test:U:24.000V I:0.8297A P:19.913W PF:1.0000 Freq:0Hz Lamp Flux:2096.94x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	151433
L_0~180 (75) av	131245
L_0~180 (85) av	88610
L_90~270 (65) av	150967
L_90~270 (75) av	132696
L_90~270 (85) av	111719
L_45 (65) av	151189
L_45 (75) av	132237
L_45 (85) av	103145

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700+5000K

Planar Illuminance Curve

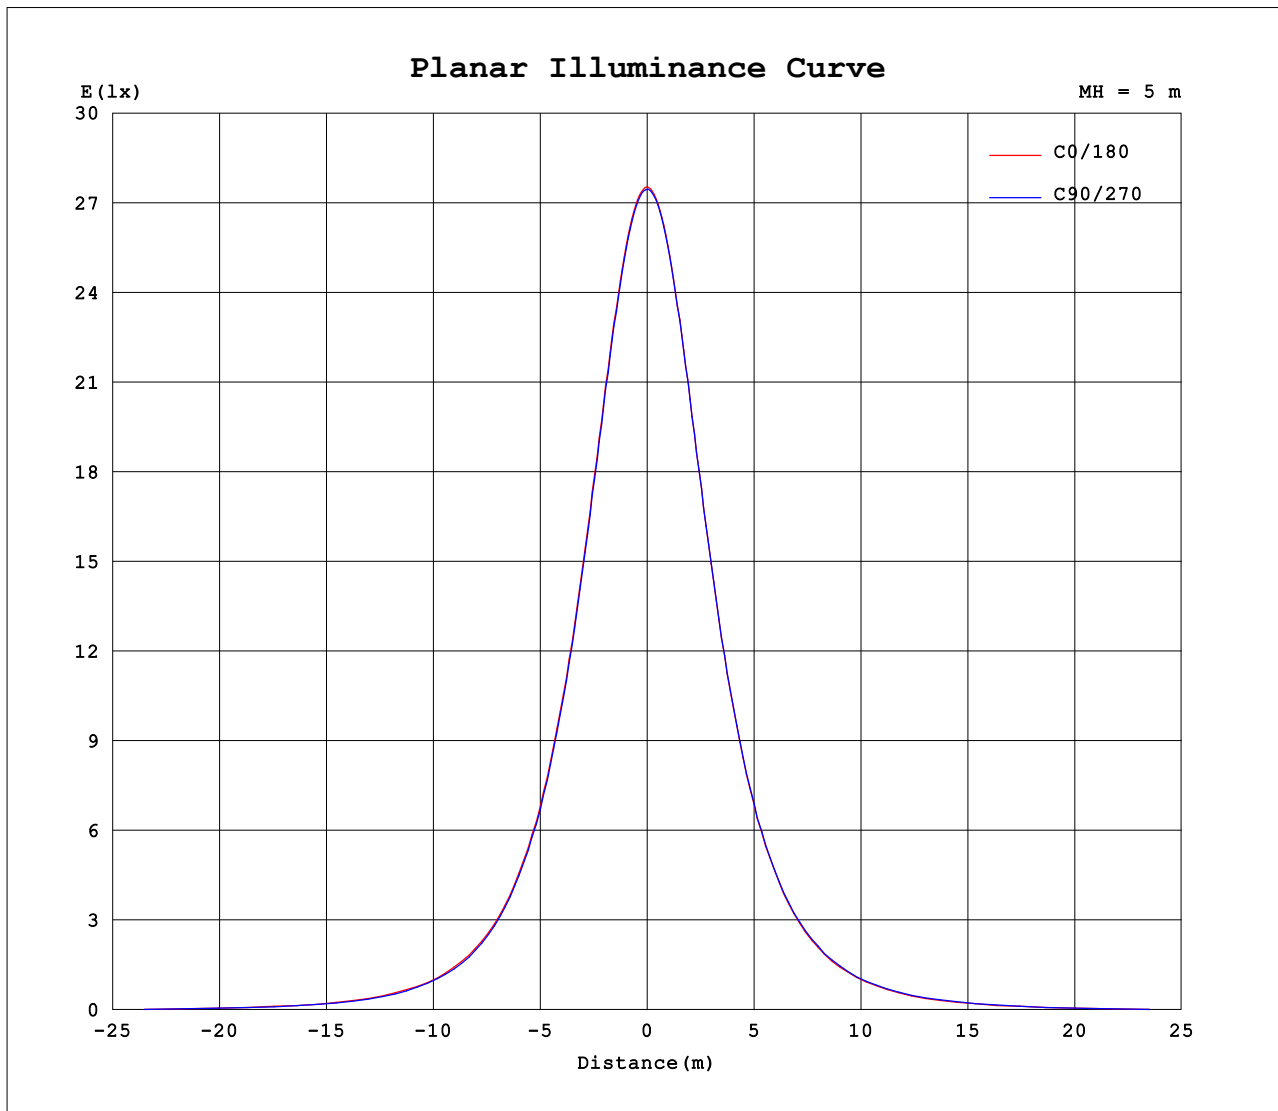

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: CHM
 Test Date: 2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity: 65.0%
 Test Distance: 9.727m [K=1.0000]
 Remarks: 2700+5000K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.000V I:0.8297A P:19.913W PF:1.0000 Freq:0Hz Lamp Flux:2096.94x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	689	687	689	687															
5	686	683	686	685															
10	678	675	679	678															
15	665	661	667	666															
20	646	643	650	649															
25	623	619	627	627															
30	595	590	599	600															
35	562	556	567	568															
40	524	518	529	531															
45	481	475	487	489															
50	434	427	440	443															
55	383	374	388	392															
60	327	317	330	337															
65	267	257	270	279															
70	205	196	208	217															
75	141	135	144	153															
80	81.5	79.3	83.2	94.1															
85	31.9	36.1	33.0	45.7															
90	2.74	10.3	4.03	17.1															
95	1.77	2.34	1.90	5.33															
100	2.19	2.22	2.27	2.27															
105	2.67	2.65	2.71	2.48															
110	3.16	3.11	3.16	2.95															
115	3.64	3.59	3.63	3.44															
120	4.12	4.04	4.09	3.90															
125	4.57	4.49	4.55	4.38															
130	5.03	4.95	5.01	4.85															
135	5.44	5.37	5.40	5.27															
140	5.82	5.75	5.77	5.67															
145	6.17	6.13	6.12	6.04															
150	6.46	6.45	6.44	6.39															
155	6.76	6.76	6.73	6.71															
160	7.03	7.01	6.99	6.97															
165	7.25	7.24	7.22	7.22															
170	7.44	7.44	7.42	7.42															
175	7.56	7.59	7.56	7.58															
180	7.65	7.67	7.65	7.68															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700+5000K