
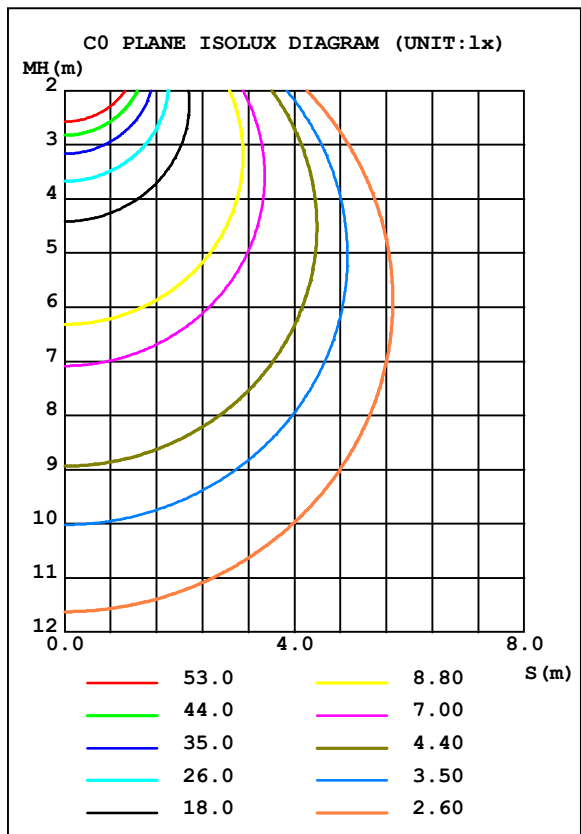


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.001V I:0.4260A P:10.224W PF:1.0000 Freq:0Hz Lamp Flux:1054.42x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 103.13 lm/W			
MODEL	CIL2835	I _{max} (cd)	351.5	S/MH (C0/180)	1.28
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	1.28
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	1054.4	η UP, DN (C0-180)	0.7, 48.8
NOMINAL FLUX (lm)	1054.42	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 49.8
LAMPS INSIDE	1	η up (%)	1.4	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	η down (%)	98.6	CIBSE SHR MAX	1.35

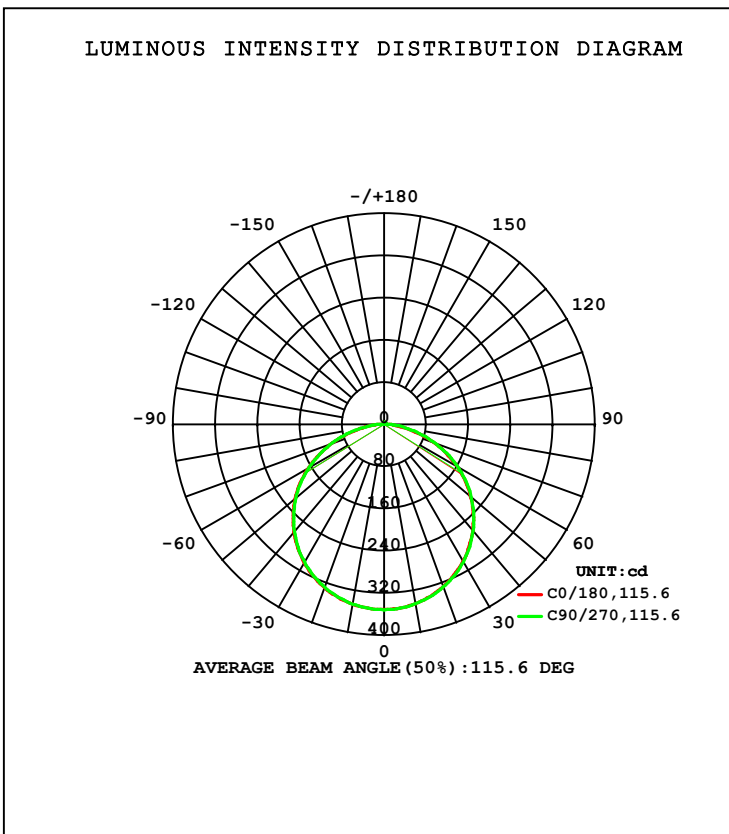

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: CHM
 Test Date: 2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity: 65.0%
 Test Distance: 9.727m [K=1.0000]
 Remarks: 2700K

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	345.1	345.6	346.3	345.9					0- 10	33.27	33.27	3.16,3.16
20	327.8	328.6	330.2	329.3					10- 20	95.63	128.9	12.2,12.2
30	299.9	301.0	303.4	302.1					20- 30	145.9	274.8	26.1,26.1
40	262.1	263.3	266.6	265.0					30- 40	177.7	452.6	42.9,42.9
50	215.1	216.6	220.4	218.9					40- 50	186.7	639.3	60.6,60.6
60	160.0	161.8	165.9	164.8					50- 60	170.9	810.2	76.8,76.8
70	98.55	100.8	104.8	105.1					60- 70	131.7	941.9	89.3,89.3
80	37.45	42.70	42.75	45.71					70- 80	75.44	1017	96.5,96.5
90	1.411	7.906	1.768	8.527					80- 90	22.16	1040	98.6,98.6
100	1.087	2.685	1.040	1.124					90-100	2.527	1042	98.8,98.8
110	1.584	2.029	1.520	1.476					100-110	1.628	1044	99,99
120	2.059	2.000	2.000	1.967					110-120	1.802	1045	99.2,99.2
130	2.526	2.461	2.455	2.442					120-130	2.000	1047	99.3,99.3
140	2.934	2.874	2.886	2.861					130-140	2.073	1050	99.5,99.5
150	3.268	3.245	3.226	3.231					140-150	1.924	1051	99.7,99.7
160	3.554	3.536	3.530	3.523					150-160	1.567	1053	99.9,99.9
170	3.767	3.767	3.755	3.755					160-170	1.033	1054	100,100
180	3.870	3.888	3.876	3.900					170-180	0.3640	1054	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700K

LUMINANCE LIMITATION CURVES

Test:U:24.001V I:0.4260A P:10.224W PF:1.0000 Freq:0Hz Lamp Flux:1054.42x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

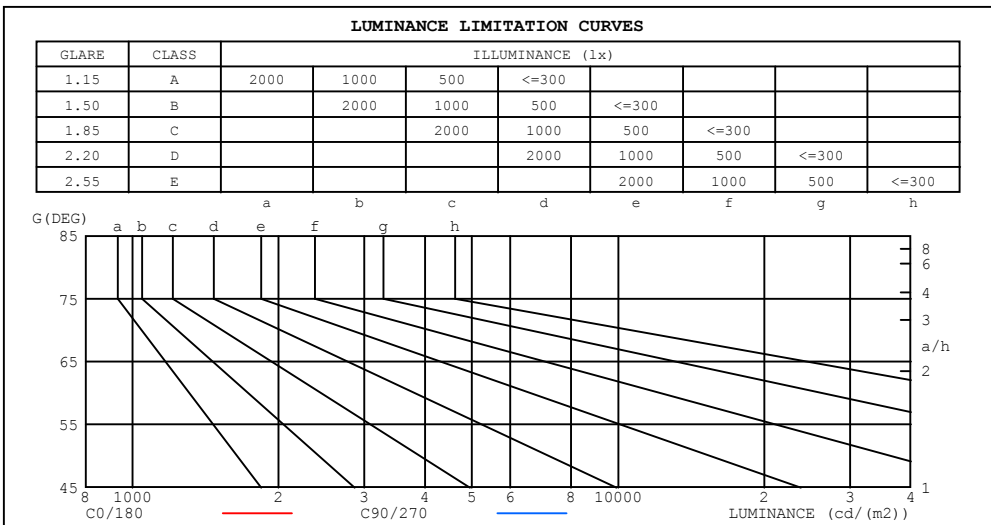

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	37951	57661
80	51356	58554
75	61664	64718
70	68602	70138
65	73140	74272
60	76187	77045
55	78264	78903
50	79688	80231
45	80734	81154


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.001V I:0.4260A P:10.224W PF:1.0000 Freq:0Hz Lamp Flux:1054.42x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.90	.87	.88	.86	.84	.82
2.0	.90	.83	.77	.88	.81	.76	.84	.79	.74	.80	.76	.72	.77	.74	.70	.68
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.65	.60	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.53	.65	.58	.52	.63	.57	.52	.61	.55	.51	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.50	.45	.54	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.39	.51	.44	.39	.49	.43	.39	.36
7.0	.50	.42	.35	.50	.41	.35	.48	.40	.35	.46	.40	.34	.45	.39	.34	.32
8.0	.46	.37	.32	.45	.37	.31	.44	.36	.31	.42	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.40	.33	.28	.39	.32	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

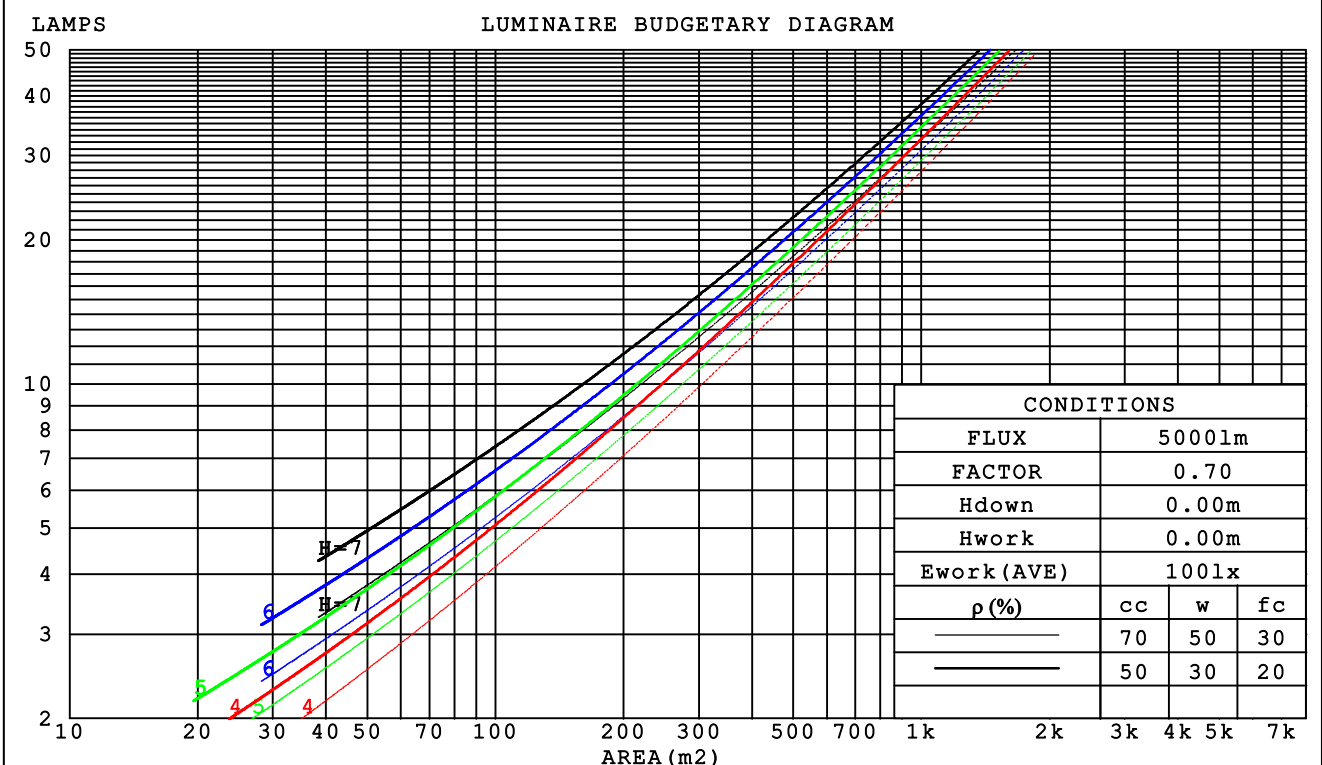

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700K

WEC AND CCEC

Test:U:24.001V I:0.4260A P:10.224W PF:1.0000 Freq:0Hz Lamp Flux:1054.42x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.314	.179	.057	.307	.175	.056	.293	.168	.054	.280	.161	.052	.268	.155	.050	
2.0	.295	.162	.050	.288	.159	.049	.276	.153	.048	.264	.148	.046	.254	.143	.045	
3.0	.272	.145	.043	.267	.143	.043	.255	.138	.042	.245	.134	.041	.236	.130	.040	
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.227	.122	.037	.218	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.218	.114	.033	.210	.111	.033	.203	.108	.033	
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.189	.099	.029	
7.0	.200	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.176	.092	.027	
8.0	.187	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.165	.085	.025	
9.0	.175	.085	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.079	.022	.161	.078	.022	.156	.077	.022	.151	.075	.021	.147	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.201	.201	.201	.172	.172	.172	.117	.117	.117	.067	.067	.067	.022	.022	.022	
1.0	.191	.167	.145	.164	.143	.125	.112	.099	.086	.065	.057	.050	.021	.018	.016	
2.0	.184	.143	.109	.157	.123	.094	.108	.085	.065	.062	.049	.038	.020	.016	.013	
3.0	.176	.125	.085	.151	.108	.074	.104	.075	.052	.060	.044	.030	.019	.014	.010	
4.0	.168	.112	.069	.144	.097	.060	.099	.067	.042	.057	.040	.025	.018	.013	.008	
5.0	.161	.102	.058	.138	.088	.050	.095	.061	.036	.055	.036	.021	.018	.012	.007	
6.0	.154	.093	.050	.132	.081	.044	.091	.057	.031	.053	.033	.018	.017	.011	.006	
7.0	.147	.087	.044	.126	.075	.039	.087	.053	.027	.051	.031	.016	.016	.010	.005	
8.0	.140	.081	.040	.121	.070	.035	.084	.049	.025	.049	.029	.015	.016	.010	.005	
9.0	.134	.076	.036	.116	.066	.032	.080	.046	.022	.047	.027	.013	.015	.009	.004	
10.0	.129	.072	.034	.111	.062	.029	.077	.044	.021	.045	.026	.012	.015	.008	.004	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700K

UGR(Unified Glare Rating) Table

Test:U:24.001V I:0.4260A P:10.224W PF:1.0000 Freq:0Hz Lamp Flux:1054.42x1 lm										
NAME: CIL2835-240-CTA-2700+5000K					TYPE:Flexible LED Strip			WEIGHT:		
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80					DIM.: (L)1000*(W)8MM			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	27.8	29.3	28.1	29.5	29.7	27.8	29.3	28.1	29.5	29.8
3H	29.3	30.7	29.6	30.9	31.2	29.3	30.7	29.6	31.0	31.3
4H	29.8	31.2	30.2	31.4	31.7	29.9	31.3	30.3	31.5	31.8
6H	30.2	31.4	30.5	31.7	32.1	30.3	31.6	30.7	31.9	32.2
8H	30.3	31.5	30.6	31.8	32.1	30.5	31.7	30.9	32.0	32.3
12H	30.3	31.5	30.7	31.8	32.1	30.6	31.8	31.0	32.1	32.4
4H 2H	28.4	29.7	28.7	30.0	30.3	28.4	29.7	28.7	30.0	30.3
3H	30.1	31.2	30.4	31.5	31.9	30.1	31.3	30.5	31.6	31.9
4H	30.7	31.8	31.1	32.2	32.5	30.8	31.9	31.2	32.2	32.6
6H	31.2	32.2	31.6	32.5	32.9	31.4	32.3	31.8	32.7	33.1
8H	31.3	32.2	31.8	32.6	33.0	31.6	32.4	32.0	32.8	33.3
12H	31.4	32.2	31.9	32.6	33.1	31.7	32.5	32.2	32.9	33.4
8H 4H	31.0	31.9	31.4	32.3	32.7	31.1	32.0	31.5	32.3	32.8
6H	31.6	32.3	32.1	32.8	33.2	31.8	32.5	32.2	32.9	33.4
8H	31.8	32.5	32.3	32.9	33.4	32.0	32.7	32.5	33.1	33.6
12H	31.9	32.5	32.4	33.0	33.5	32.3	32.8	32.8	33.3	33.8
12H 4H	31.0	31.8	31.4	32.2	32.7	31.1	31.9	31.5	32.3	32.7
6H	31.7	32.3	32.1	32.8	33.2	31.8	32.4	32.3	32.9	33.4
8H	31.9	32.5	32.4	32.9	33.4	32.1	32.7	32.6	33.1	33.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 1054 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.2)

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700K

UTILIZATION FACTORS TABLE

Test:U:24.001V I:0.4260A P:10.224W PF:1.0000 Freq:0Hz Lamp Flux:1054.42x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	45	38	56	45	38	54	44	37	31
0.80	67	55	47	65	54	47	64	53	47	40
1.00	75	64	56	74	63	56	71	64	55	48
1.25	82	71	64	81	71	64	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	88	82	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	94	89	99	93	88	95	90	85	76
4.00	106	100	95	103	98	93	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700K

ISOCANDELA DIAGRAM

Test:U:24.001V I:0.4260A P:10.224W PF:1.0000 Freq:0Hz Lamp Flux:1054.42x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

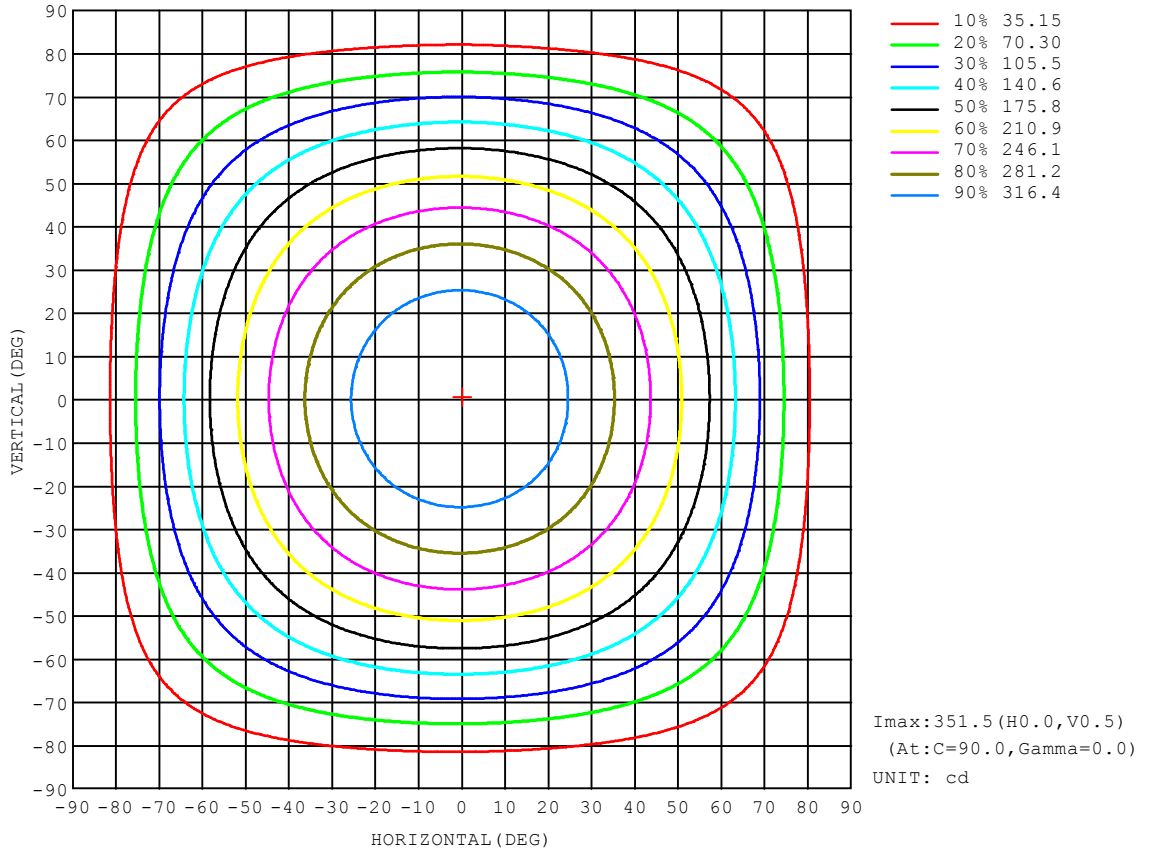


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700K

AAI Figure

Test:U:24.001V I:0.4260A P:10.224W PF:1.0000 Freq:0Hz Lamp Flux:1054.42x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

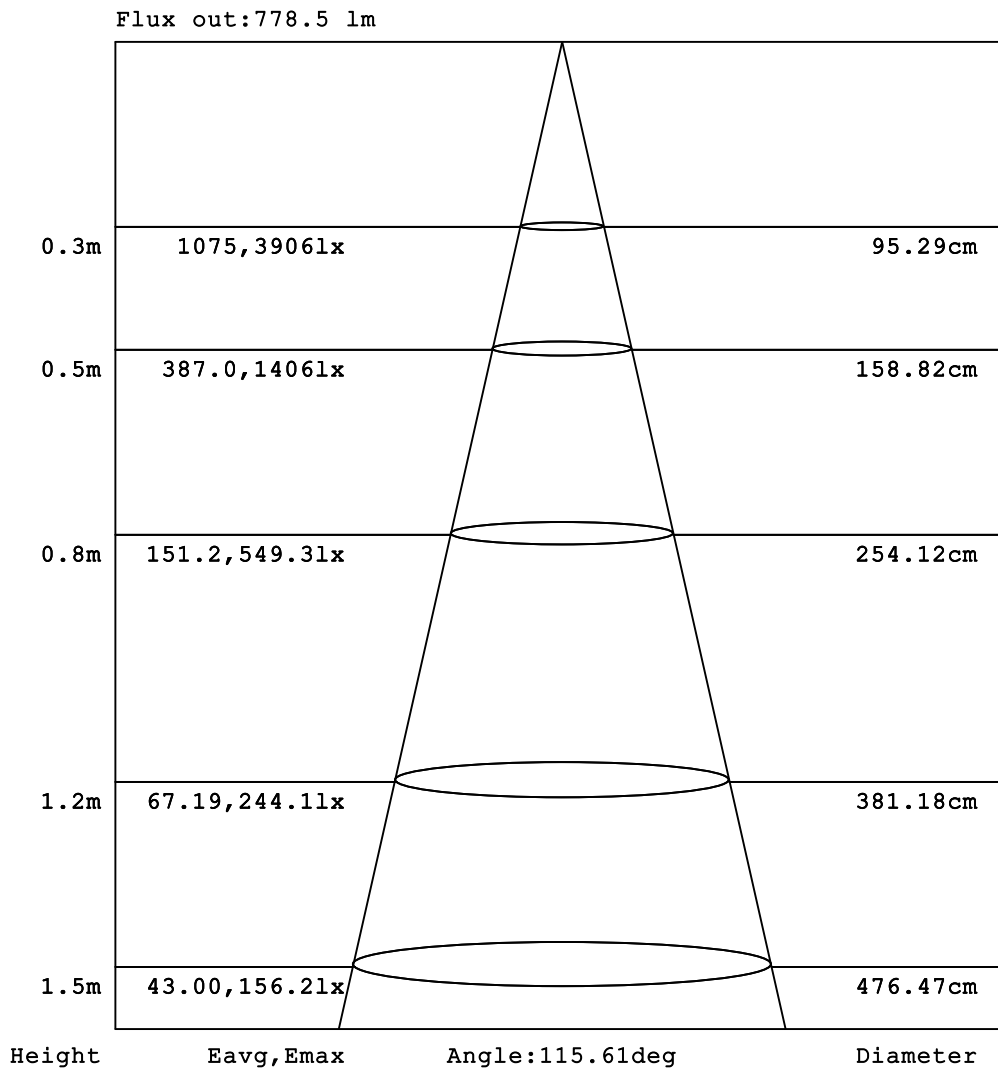


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700K

ISOLUX DIAGRAM

Test:U:24.001V I:0.4260A P:10.224W PF:1.0000 Freq:0Hz Lamp Flux:1054.42x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

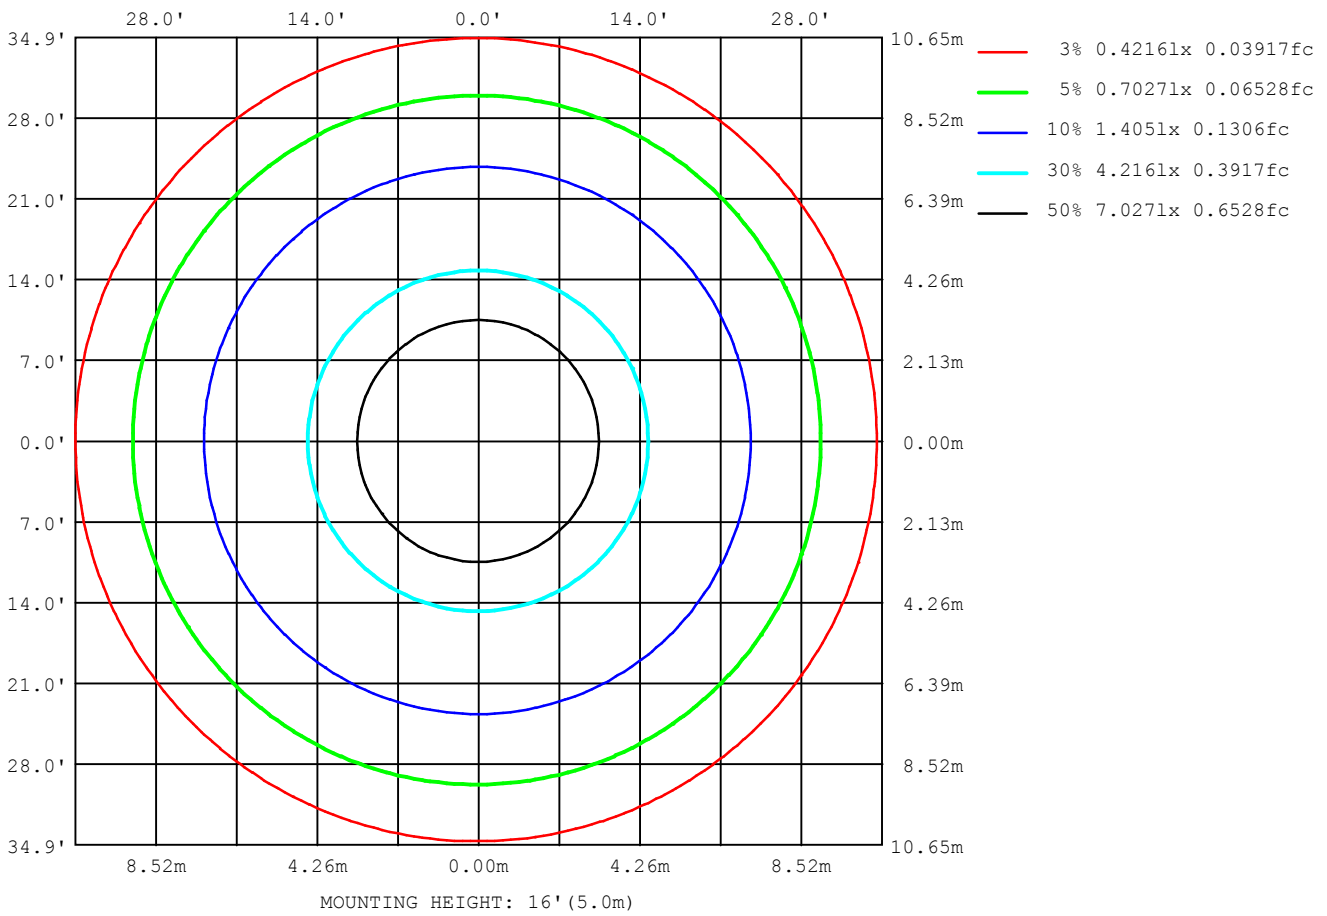

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700K

LED Avg.L Report

Test:U:24.001V I:0.4260A P:10.224W PF:1.0000 Freq:0Hz Lamp Flux:1054.42x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	74890
L_0~180 (75) av	64442
L_0~180 (85) av	42978
L_90~270 (65) av	75295
L_90~270 (75) av	66629
L_90~270 (85) av	59337
L_45 (65) av	75252
L_45 (75) av	65983
L_45 (85) av	53517

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700K

Planar Illuminance Curve

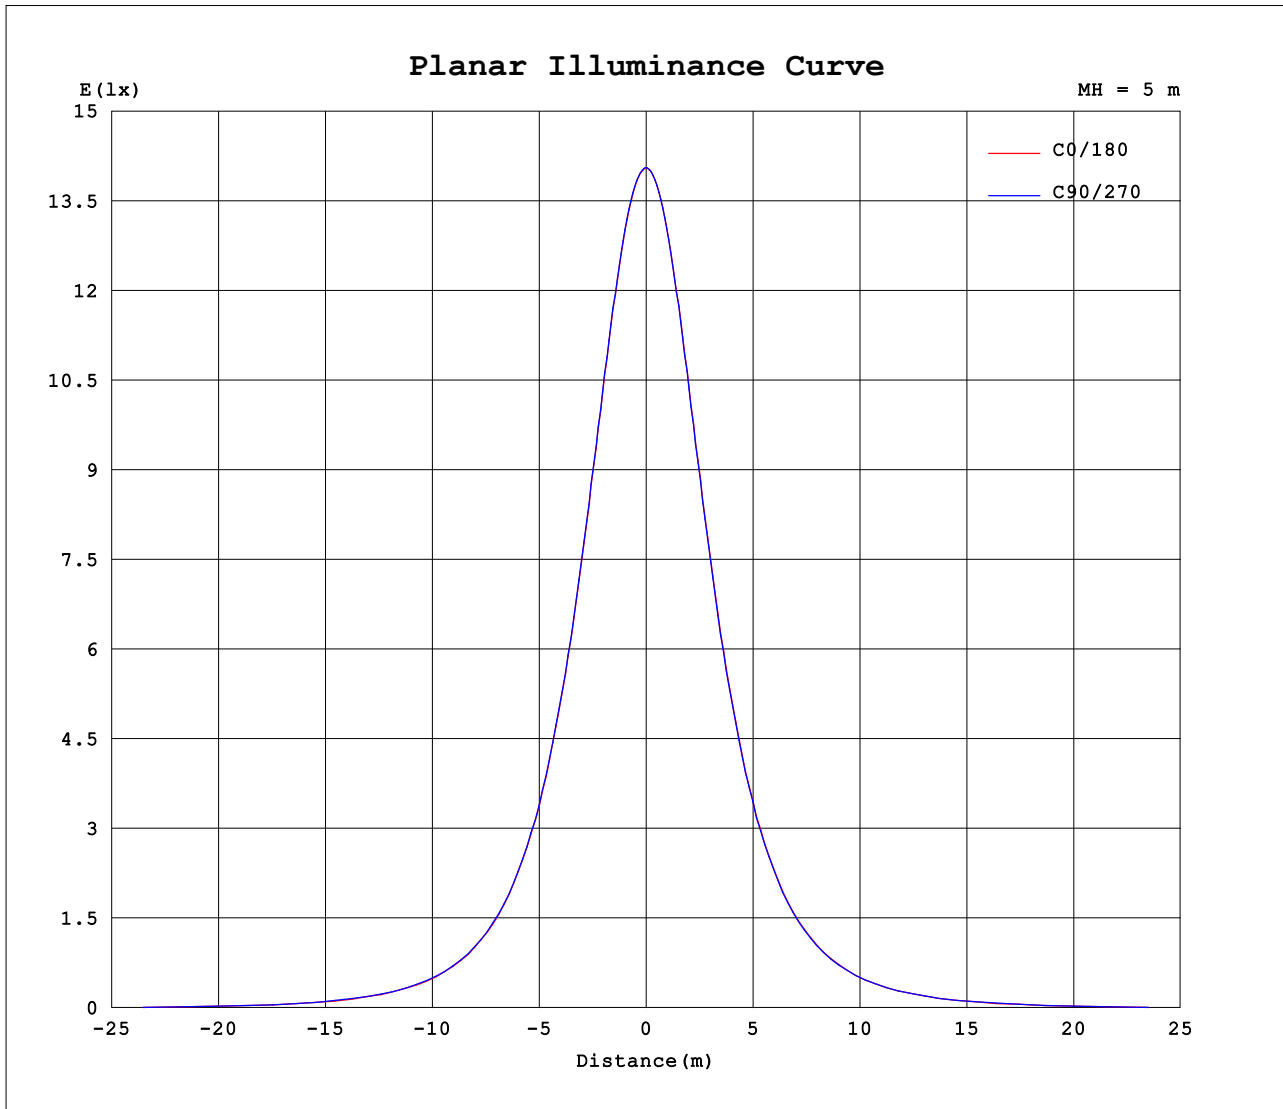

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: CHM
 Test Date: 2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity: 65.0%
 Test Distance: 9.727m [K=1.0000]
 Remarks: 2700K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.001V I:0.4260A P:10.224W PF:1.0000 Freq:0Hz Lamp Flux:1054.42x1 lm		
NAME: CIL2835-240-CTA-2700+5000K	TYPE:Flexible LED Strip	WEIGHT:
SPEC.:SMD2835,240LEDs/m,2700+5000K,Ra>80	DIM.: (L)1000*(W)8MM	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	351	352	351	352															
5	350	350	350	350															
10	345	346	346	346															
15	338	338	340	339															
20	328	329	330	329															
25	315	316	318	317															
30	300	301	303	302															
35	282	283	286	285															
40	262	263	267	265															
45	240	241	245	243															
50	215	217	220	219															
55	189	190	194	193															
60	160	162	166	165															
65	130	132	136	135															
70	98.5	101	105	105															
75	67.0	70.4	73.1	74.5															
80	37.5	42.7	42.8	45.7															
85	13.9	21.1	17.6	22.3															
90	1.41	7.91	1.77	8.53															
95	0.87	3.38	0.83	2.72															
100	1.09	2.69	1.04	1.12															
105	1.33	2.27	1.28	1.24															
110	1.58	2.03	1.52	1.48															
115	1.83	1.92	1.76	1.72															
120	2.06	2.00	2.00	1.97															
125	2.30	2.22	2.22	2.20															
130	2.53	2.46	2.46	2.44															
135	2.74	2.67	2.67	2.66															
140	2.93	2.87	2.89	2.86															
145	3.11	3.07	3.06	3.06															
150	3.27	3.24	3.23	3.23															
155	3.41	3.40	3.38	3.38															
160	3.55	3.54	3.53	3.52															
165	3.68	3.66	3.66	3.65															
170	3.77	3.77	3.75	3.75															
175	3.84	3.85	3.83	3.84															
180	3.87	3.89	3.88	3.90															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHM
 Test Date:2022-11-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:9.727m [K=1.0000]
 Remarks: 2700K