
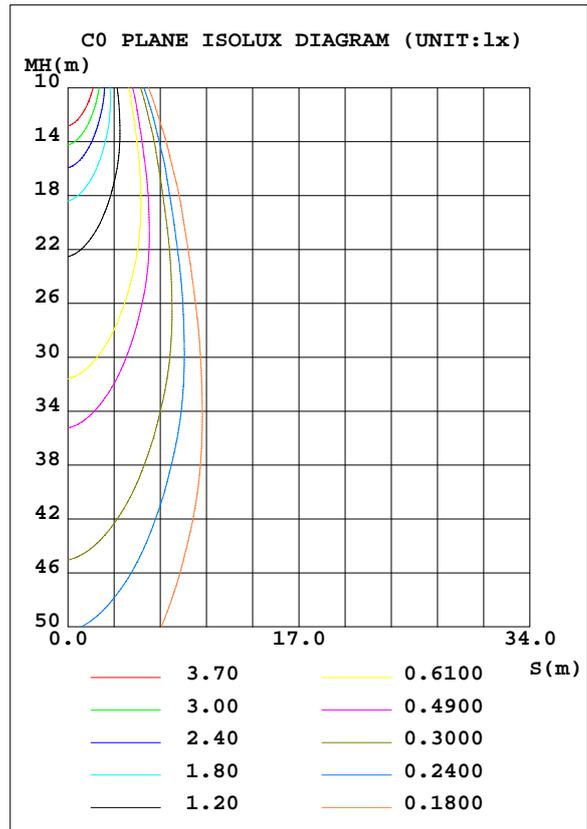


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:8.6610V I:0.3500A P:3.0315W PF:1.0000 Freq:0Hz Lamp Flux:187.69x1 lm		
NAME: OJL15803	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: D-LUX	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	OJL15803	Imax(cd)	611.3	S/MH(C0/180)	0.53
NOMINAL POWER(W)	3	LOR(%)	100.0	S/MH(C90/270)	0.51
RATED VOLTAGE(V)	9	TOTAL FLUX(lm)	187.69	η UP, DN(C0-180)	0.0,47.5
NOMINAL FLUX(lm)	187.69	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,52.4
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	8.661	η down(%)	100.0	CIBSE SHR MAX	0.50

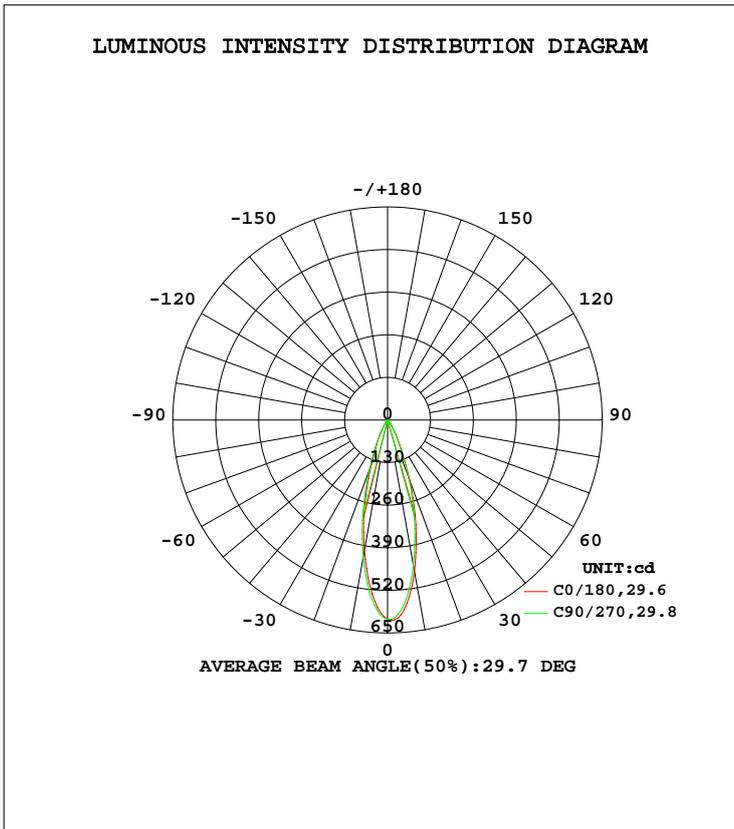

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:
 Test Date:2018-10-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:56%
 Test Distance:2.554m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	403.8	408.1	425.2	446.3	468.7	470.0	450.0	425.0	0- 10	49.24	49.24	26.2,26.2
20	143.1	146.2	158.4	171.4	196.6	201.8	185.0	161.4	10- 20	81.34	130.6	69.6,69.6
30	32.38	32.37	35.05	39.55	45.52	46.62	41.15	36.18	20- 30	40.08	170.7	90.9,90.9
40	7.864	7.380	8.388	9.066	10.39	10.50	9.583	8.776	30- 40	11.88	182.5	97.3,97.3
50	2.048	1.747	1.965	2.280	2.737	2.696	2.572	2.337	40- 50	3.778	186.3	99.3,99.3
60	0.2481	0.2425	0.2872	0.3729	0.5203	0.5743	0.4545	0.3014	50- 60	1.096	187.4	99.9,99.9
70	0.0512	0.0525	0.0671	0.0817	0.0823	0.0888	0.0814	0.0607	60- 70	0.1663	187.6	99.9,99.9
80	0	0	0	0.0000	0	0	0	0	70- 80	0.0256	187.6	100,100
90	0	0	0	0	0	0	0	0	80- 90	0.0000	187.6	100,100
100	0	0	0	0	0	0	0	0	90-100	0	187.6	100,100
110	0	0	0	0	0	0	0	0	100-110	0	187.6	100,100
120	0	0	0	0	0	0	0	0	110-120	0	187.6	100,100
130	0	0	0	0	0	0	0	0	120-130	0	187.6	100,100
140	0.0025	0.0074	0.0084	0	0	0.0069	0.0162	0.0143	130-140	0.0006	187.6	100,100
150	0.0367	0.0530	0.0560	0.0449	0.0388	0.0612	0.0762	0.0787	140-150	0.0180	187.6	100,100
160	0.0643	0.0780	0.0832	0.0690	0.0814	0.0938	0.1143	0.1153	150-160	0.0339	187.7	100,100
170	0.0634	0.0722	0.0709	0.0625	0.0840	0.0983	0.1045	0.1094	160-170	0.0253	187.7	100,100
180	0.0597	0.0672	0.0514	0.0576	0.0601	0.0656	0.0641	0.0576	170-180	0.0071	187.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 184.99 lm

%lum = 98.6%

%lamp = 98.6%

Conical surface Flux(120deg): 187.41 lm

%lum = 99.9%


%lamp = 99.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:
 Test Date:2018-10-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:56%
 Test Distance:2.554m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:8.6610V I:0.3500A P:3.0315W PF:1.0000 Freq:0Hz Lamp Flux:187.69x1 lm		
NAME: OJL15803	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: D-LUX	SUR.:	Shielding Angle:

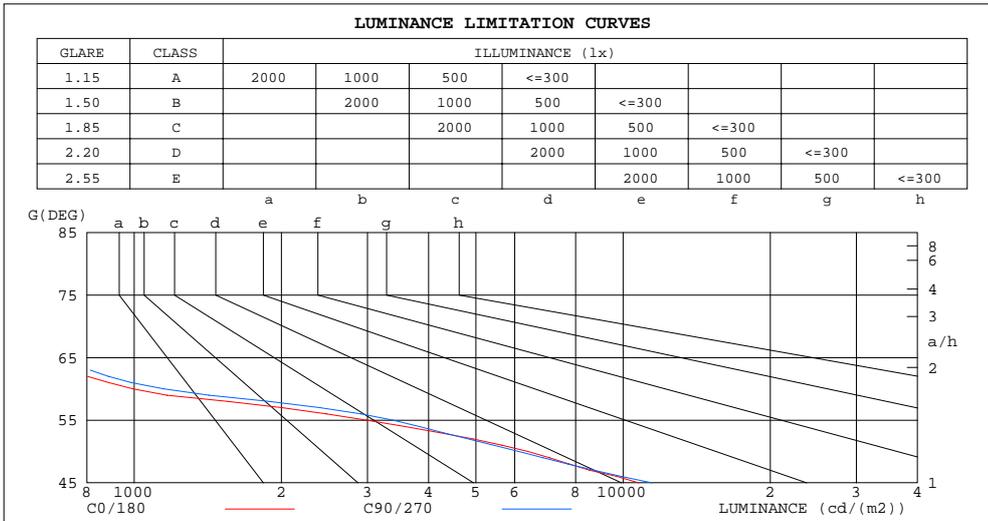

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	0	0
80	0	0
75	60	150
70	300	392
65	588	676
60	994	1149
55	2984	3380
50	6379	6112
45	10764	11454


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators:
 Test Date: 2018-10-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity: 56%
 Test Distance: 2.554m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:8.6610V I:0.3500A P:3.0315W PF:1.0000 Freq:0Hz Lamp Flux:187.69x1 lm		
NAME: OJL15803	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: D-LUX	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.05	1.03	1.03	1.01	1.00	.99	.98	.97	.96
2.0	1.06	1.03	1.00	1.05	1.02	.99	1.02	.99	.97	.99	.97	.95	.96	.95	.93	.92
3.0	1.01	.97	.94	.90	.96	.93	.97	.94	.92	.95	.93	.91	.93	.91	.89	.88
4.0	.97	.92	.89	.96	.92	.88	.93	.90	.87	.92	.89	.86	.90	.87	.85	.84
5.0	.92	.88	.84	.92	.87	.84	.90	.86	.83	.88	.85	.83	.87	.84	.82	.81
6.0	.89	.84	.81	.88	.84	.80	.87	.83	.80	.85	.82	.79	.84	.81	.79	.78
7.0	.85	.80	.77	.85	.80	.77	.83	.79	.77	.82	.79	.76	.81	.78	.76	.75
8.0	.82	.77	.74	.81	.77	.74	.80	.77	.74	.80	.76	.73	.79	.76	.73	.72
9.0	.79	.74	.71	.79	.74	.71	.78	.74	.71	.77	.73	.71	.76	.73	.71	.70
10.0	.76	.72	.69	.76	.72	.69	.75	.71	.69	.75	.71	.68	.74	.71	.68	.67

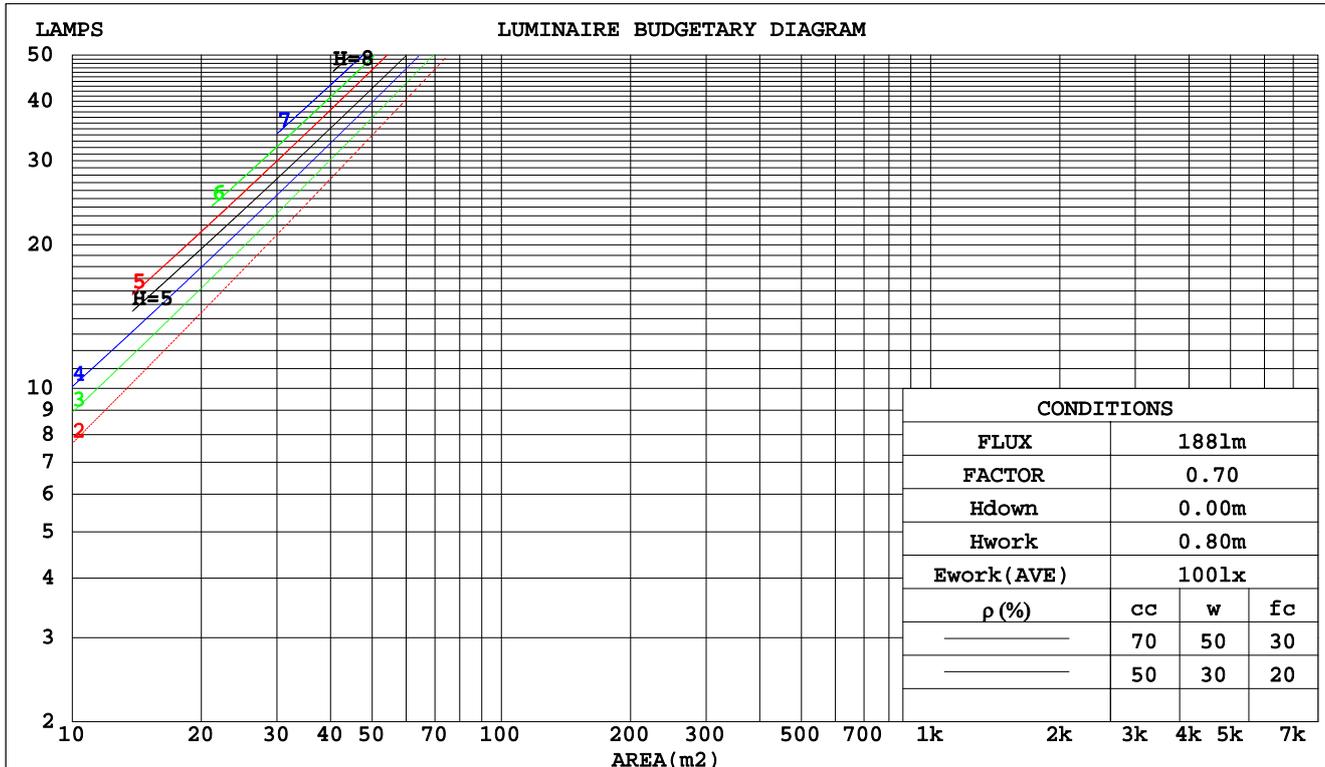

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators:
 Test Date: 2018-10-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity: 56%
 Test Distance: 2.554m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:8.6610V I:0.3500A P:3.0315W PF:1.0000 Freq:0Hz Lamp Flux:187.69x1 lm		
NAME: OJL15803	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: D-LUX	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	
ρpw	20%			20%			20%			20%			20%			0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.147	.084	.027	.141	.080	.025	.128	.074	.023	.117	.067	.022	.106	.062	.020	
2.0	.138	.076	.023	.133	.073	.022	.122	.068	.021	.113	.063	.020	.104	.059	.019	
3.0	.130	.069	.021	.125	.067	.020	.116	.063	.019	.108	.059	.018	.101	.056	.017	
4.0	.122	.064	.019	.118	.062	.018	.111	.059	.018	.104	.056	.017	.098	.053	.016	
5.0	.116	.059	.017	.113	.058	.017	.106	.055	.016	.100	.053	.016	.095	.051	.015	
6.0	.110	.055	.016	.107	.054	.016	.102	.052	.015	.097	.050	.015	.092	.048	.014	
7.0	.105	.052	.015	.102	.051	.015	.098	.049	.014	.093	.048	.014	.089	.046	.014	
8.0	.100	.049	.014	.098	.048	.014	.094	.047	.013	.090	.046	.013	.086	.044	.013	
9.0	.096	.046	.013	.094	.046	.013	.090	.045	.013	.087	.043	.012	.083	.042	.012	
10.0	.092	.044	.012	.090	.044	.012	.087	.043	.012	.084	.042	.012	.081	.041	.012	

ρcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	
ρpw	20%			20%			20%			20%			20%			0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.169	.158	.148	.145	.136	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017	
3.0	.152	.133	.117	.130	.114	.101	.089	.079	.071	.051	.046	.041	.017	.015	.013	
4.0	.138	.114	.094	.118	.098	.082	.081	.068	.057	.047	.040	.034	.015	.013	.011	
5.0	.126	.099	.078	.108	.085	.067	.074	.059	.047	.043	.035	.028	.014	.011	.009	
6.0	.116	.086	.065	.100	.075	.056	.069	.052	.040	.040	.031	.024	.013	.010	.008	
7.0	.108	.077	.054	.092	.066	.047	.064	.046	.034	.037	.027	.020	.012	.009	.007	
8.0	.100	.069	.046	.086	.059	.040	.060	.042	.029	.035	.025	.017	.011	.008	.006	
9.0	.094	.062	.040	.081	.054	.035	.056	.038	.025	.033	.022	.015	.011	.007	.005	
10.0	.089	.056	.035	.076	.049	.030	.053	.034	.022	.031	.020	.013	.010	.007	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators:
 Test Date: 2018-10-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity: 56%
 Test Distance: 2.554m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:8.6610V I:0.3500A P:3.0315W PF:1.0000 Freq:0Hz Lamp Flux:187.69x1 lm										
NAME: OJL15803					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: D-LUX					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.7	12.4	11.9	12.6	12.7	12.1	12.8	12.3	13.0	13.1
3H	11.5	12.2	11.8	12.4	12.6	11.9	12.6	12.2	12.8	13.0
4H	11.4	12.1	11.7	12.3	12.5	11.8	12.5	12.1	12.7	12.9
6H	11.4	12.0	11.6	12.2	12.4	11.8	12.4	12.0	12.6	12.8
8H	11.3	11.9	11.6	12.1	12.4	11.7	12.3	12.0	12.5	12.8
12H	11.3	11.8	11.6	12.1	12.4	11.7	12.2	12.0	12.5	12.8
4H 2H	11.5	12.1	11.7	12.3	12.5	11.9	12.5	12.1	12.7	12.9
3H	11.3	11.8	11.6	12.1	12.4	11.7	12.2	12.0	12.5	12.8
4H	11.2	11.7	11.5	12.0	12.3	11.6	12.1	11.9	12.4	12.7
6H	11.1	11.5	11.5	11.9	12.2	11.5	11.9	11.9	12.3	12.6
8H	11.0	11.5	11.4	11.8	12.2	11.4	11.9	11.8	12.2	12.6
12H	11.0	11.4	11.4	11.7	12.1	11.4	11.8	11.8	12.1	12.5
8H 4H	11.0	11.5	11.4	11.8	12.2	11.4	11.9	11.8	12.2	12.6
6H	10.9	11.3	11.3	11.7	12.1	11.3	11.7	11.7	12.1	12.5
8H	10.9	11.2	11.3	11.6	12.0	11.3	11.6	11.7	12.0	12.4
12H	10.8	11.1	11.3	11.5	12.0	11.2	11.5	11.7	11.9	12.4
12H 4H	11.0	11.4	11.4	11.7	12.1	11.4	11.8	11.8	12.1	12.5
6H	10.9	11.2	11.3	11.6	12.0	11.3	11.6	11.7	12.0	12.4
8H	10.8	11.1	11.3	11.5	12.0	11.2	11.5	11.7	11.9	12.4
Variations with the observer position at spacings:										
S = 1.0H	+ 3.2 / -10.9					+ 3.2 / -10.5				
1.5H	+ 4.9 / - 7.2					+ 5.0 / - 7.3				
2.0H	+ 6.1 / -10.6					+ 6.1 / -10.7				

CIE Pub.117, 187.7 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -5.8)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:
 Test Date:2018-10-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:56%
 Test Distance:2.554m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:8.6610V I:0.3500A P:3.0315W PF:1.0000 Freq:0Hz Lamp Flux:187.69x1 lm		
NAME: OJL15803	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: D-LUX	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	90	84	80	89	84	80	89	83	80	77
0.80	97	92	88	96	91	88	95	91	88	84
1.00	101	96	92	100	95	92	99	95	92	88
1.25	105	100	97	104	99	96	102	98	95	92
1.50	107	103	100	106	102	99	104	101	98	94
2.00	109	106	103	108	105	102	105	103	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	116	113	112	113	112	110	109	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:
 Test Date:2018-10-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:56%
 Test Distance:2.554m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:8.6610V I:0.3500A P:3.0315W PF:1.0000 Freq:0Hz Lamp Flux:187.69x1 lm		
NAME: OJL15803	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: D-LUX	SUR.:	Shielding Angle:

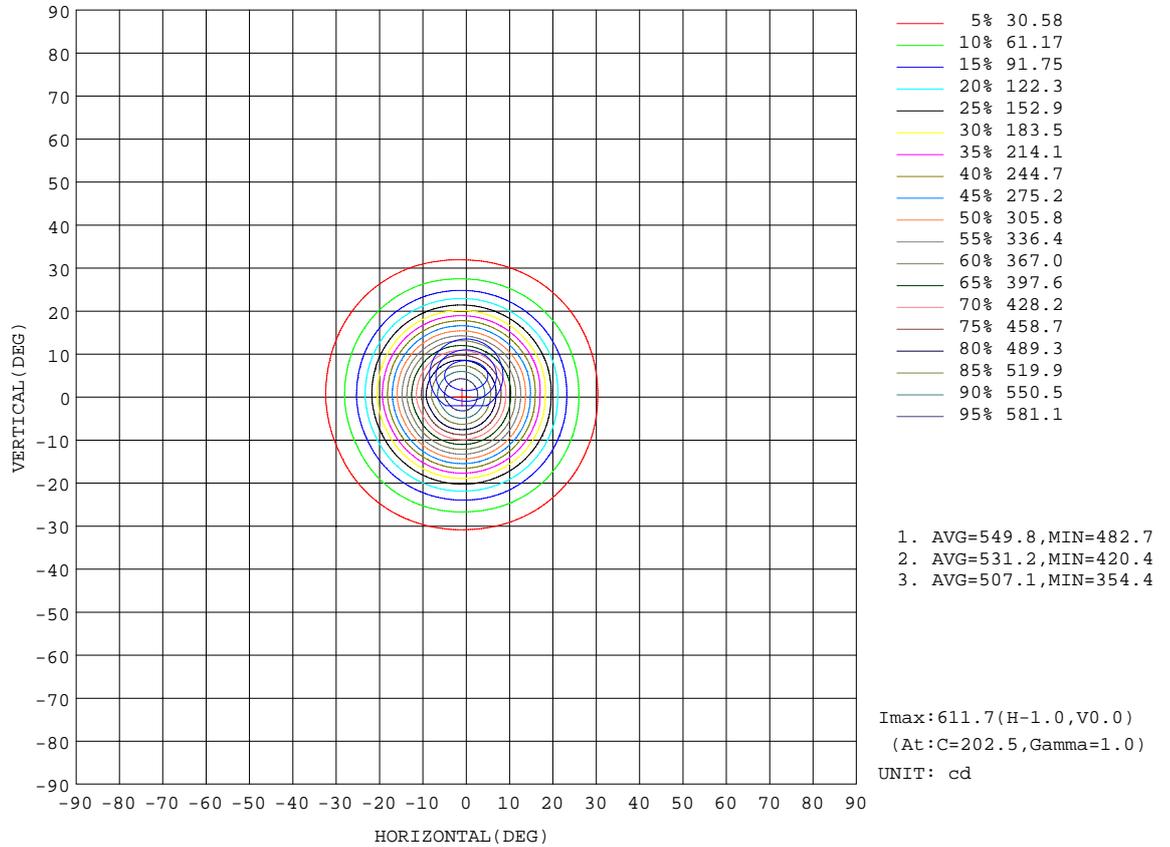


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators:
 Test Date: 2018-10-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity: 56%
 Test Distance: 2.554m [K=1.0000]
 Remarks:

AAI Figure

Test:U:8.6610V I:0.3500A P:3.0315W PF:1.0000 Freq:0Hz Lamp Flux:187.69x1 lm		
NAME: OJL15803	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

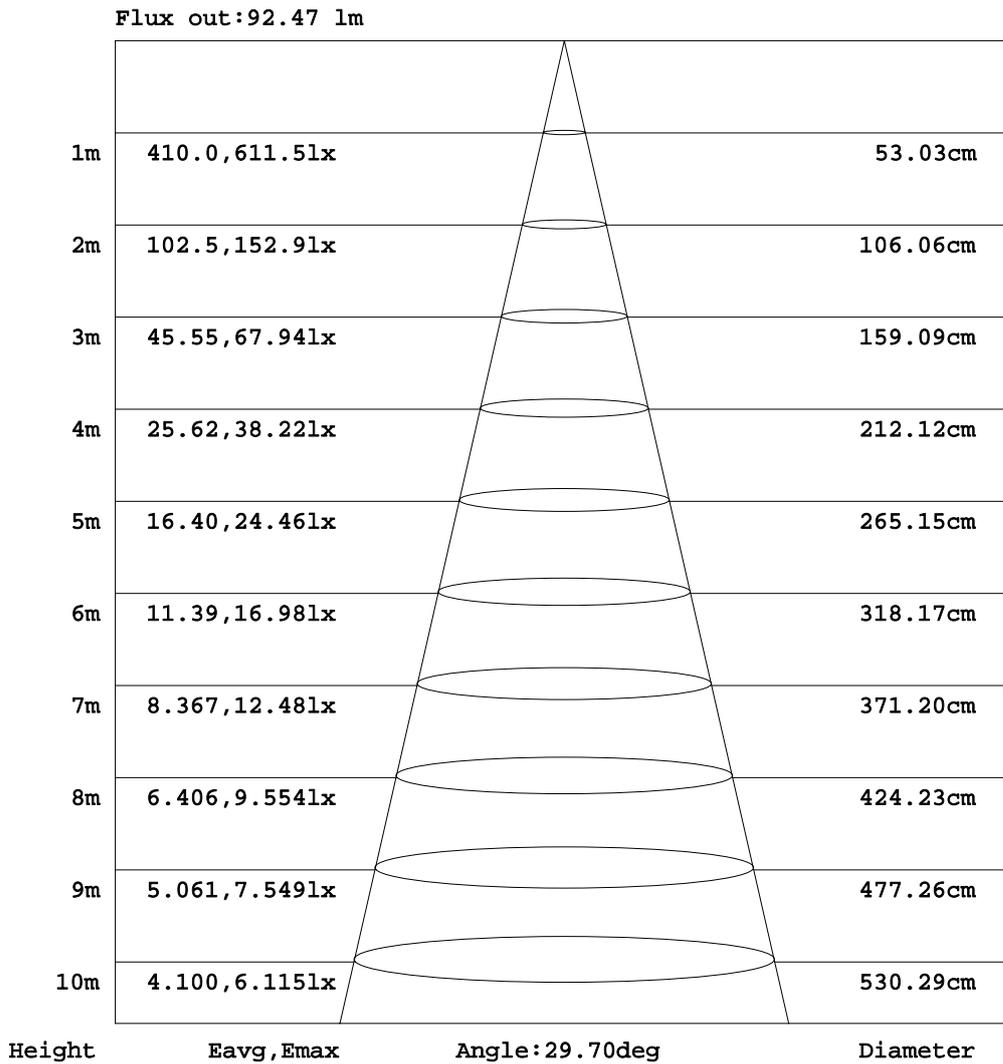


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:
 Test Date:2018-10-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:56%
 Test Distance:2.554m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:8.6610V I:0.3500A P:3.0315W PF:1.0000 Freq:0Hz Lamp Flux:187.69x1 lm		
NAME: OJL15803	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: D-LUX	SUR.:	Shielding Angle:

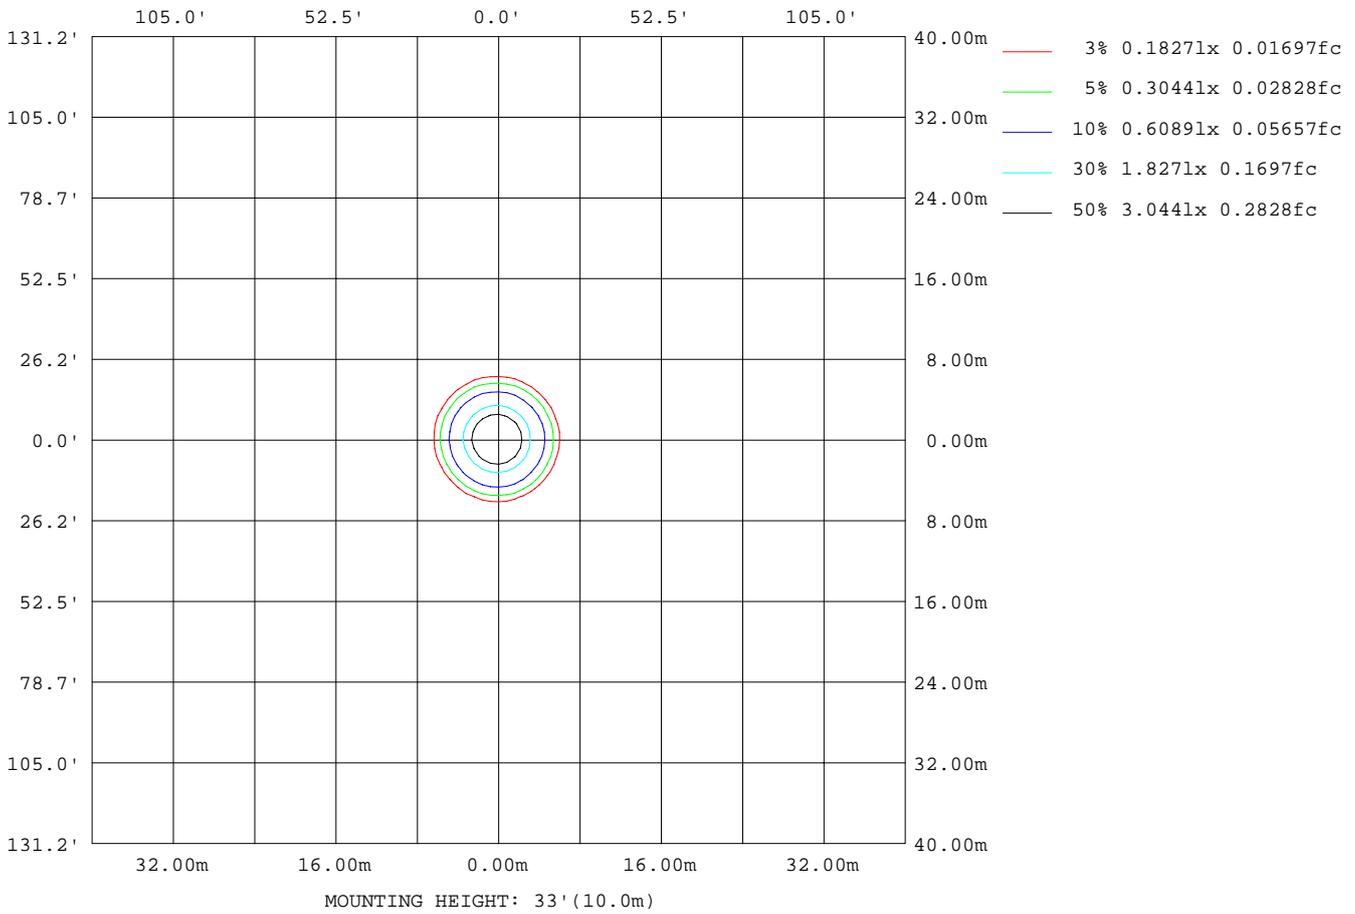

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed:
 Temperature:25.2DEG
 Operators:
 Test Date:2018-10-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:56%
 Test Distance:2.554m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:8.6610V I:0.3500A P:3.0315W PF:1.0000 Freq:0Hz Lamp Flux:187.69x1 lm		
NAME: OJL004	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: D-LUX	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	702
L_0~180(75)av	118
L_0~180(85)av	0
L_90~270(65)av	737
L_90~270(75)av	167
L_90~270(85)av	0
L_45(65)av	724
L_45(75)av	153
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed:
 Temperature:25.2DEG
 Operators:
 Test Date:2018-10-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:56%
 Test Distance:2.554m [K=1.0000]
 Remarks:

Planar Illuminance Curve

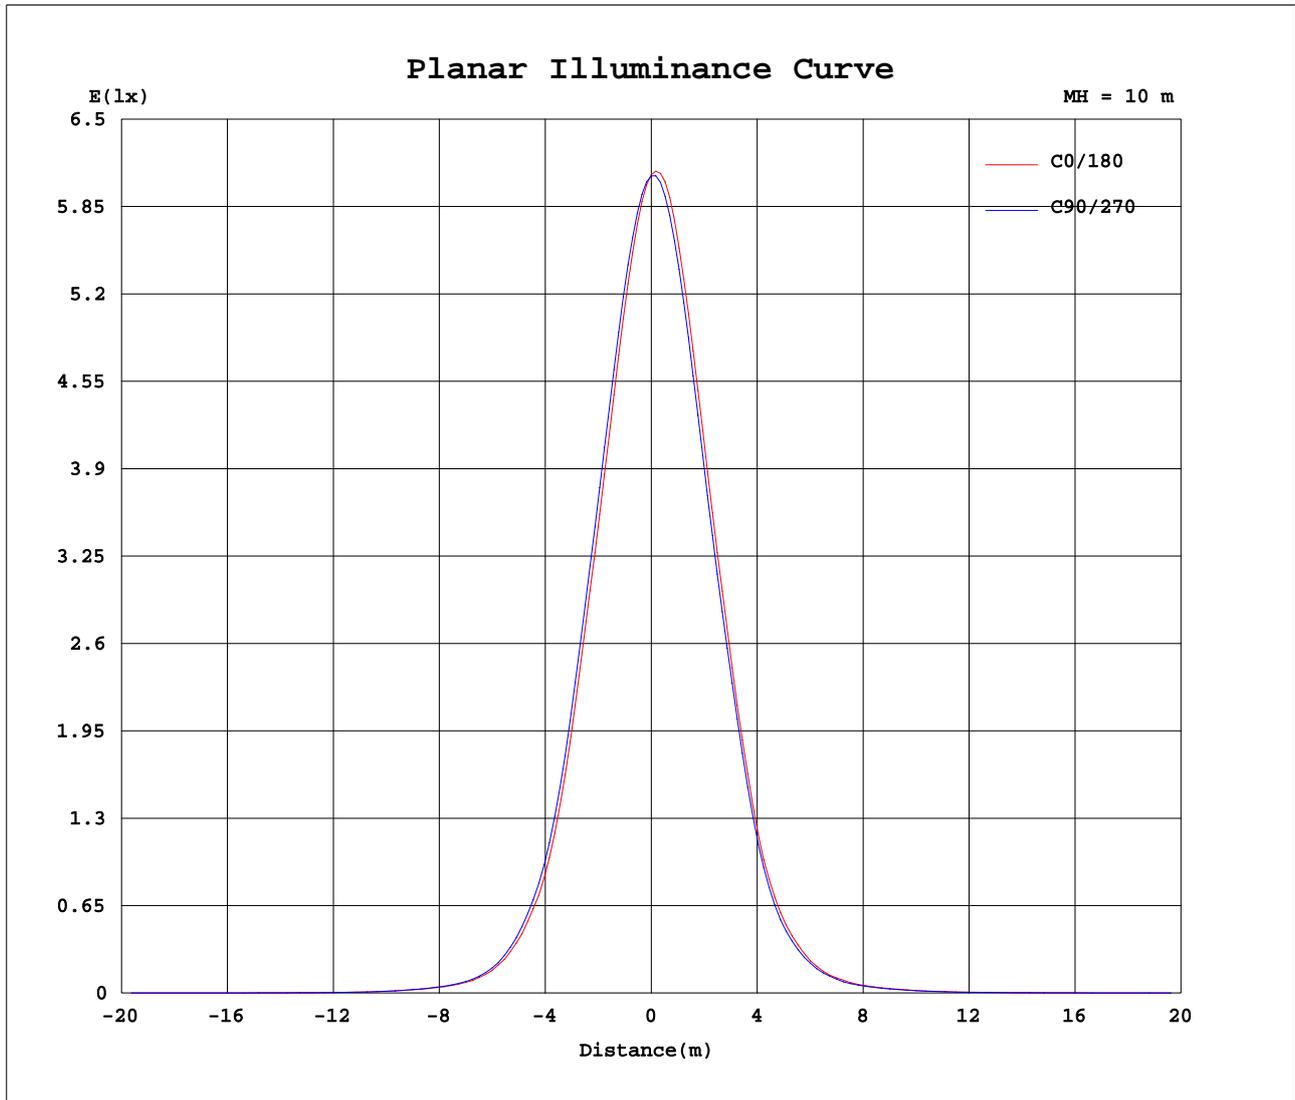

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed:
Temperature: 25.2DEG
Operators:
Test Date: 2018-10-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.366
Humidity: 56%
Test Distance: 2.554m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:8.6610V I:0.3500A P:3.0315W PF:1.0000 Freq:0Hz Lamp Flux:187.69x1 lm		
NAME: OJL15803	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: D-LUX	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	608	608	608	608	608	608	608	608	608	608	608	608	608	608	608	608			
5	533	532	536	541	548	555	564	570	581	583	581	575	566	557	548	542			
10	404	403	408	416	425	435	446	453	469	472	470	462	450	437	425	415			
15	269	269	272	279	288	298	308	316	331	334	333	326	315	302	289	281			
20	143	144	146	151	158	164	171	181	197	202	202	196	185	172	161	154			
25	71.5	72.2	73.7	77.9	79.6	83.7	86.8	89.3	95.8	98.0	97.6	94.1	88.4	82.2	77.5	73.9			
30	32.4	31.5	32.4	33.7	35.0	37.7	39.5	40.9	45.5	46.5	46.6	45.5	41.2	39.1	36.2	33.6			
35	14.7	14.0	14.5	14.9	15.7	16.6	17.4	18.1	20.7	21.3	21.5	20.8	19.0	18.1	16.4	15.4			
40	7.86	7.26	7.38	7.91	8.39	8.74	9.07	9.63	10.4	10.6	10.5	10.4	9.58	9.24	8.78	8.27			
45	3.80	3.37	3.44	3.91	4.05	4.18	4.53	5.03	5.60	5.78	5.69	5.63	5.28	4.92	4.57	4.28			
50	2.05	1.74	1.75	1.91	1.96	2.06	2.28	2.51	2.74	2.80	2.70	2.69	2.57	2.40	2.34	2.29			
55	0.85	0.83	0.82	0.87	0.97	1.09	1.25	1.41	1.54	1.56	1.55	1.52	1.42	1.33	1.27	1.09			
60	0.25	0.24	0.24	0.26	0.29	0.33	0.37	0.44	0.52	0.55	0.57	0.52	0.45	0.37	0.30	0.26			
65	0.12	0.12	0.12	0.13	0.14	0.16	0.17	0.17	0.17	0.18	0.18	0.18	0.17	0.16	0.14	0.13			
70	0.05	0.05	0.05	0.06	0.07	0.07	0.08	0.09	0.08	0.09	0.09	0.09	0.08	0.07	0.06	0.05			
75	0.01	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.02	0.03	0.03	0.03	0.02	0.02	0.01	0.00			
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.01	0.01			
145	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.01	0.01	0.02	0.03	0.04	0.04	0.04	0.05	0.03			
150	0.04	0.04	0.05	0.06	0.06	0.05	0.04	0.03	0.04	0.04	0.06	0.07	0.08	0.08	0.08	0.07			
155	0.05	0.06	0.07	0.07	0.07	0.07	0.06	0.05	0.06	0.06	0.08	0.10	0.10	0.10	0.10	0.09			
160	0.06	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.08	0.09	0.09	0.11	0.11	0.12	0.12	0.11			
165	0.07	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.09	0.09	0.10	0.11	0.11	0.12	0.12	0.11			
170	0.06	0.06	0.07	0.07	0.07	0.07	0.06	0.06	0.08	0.09	0.10	0.10	0.10	0.11	0.11	0.11			
175	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.07	0.08	0.08	0.09	0.08	0.08	0.09	0.08			
180	0.06	0.06	0.07	0.06	0.05	0.05	0.06	0.06	0.06	0.06	0.07	0.07	0.06	0.06	0.06	0.06			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:
 Test Date:2018-10-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:56%
 Test Distance:2.554m [K=1.0000]
 Remarks: